

Excellent value for harvesters and heavy equipment


MICHELIN MEGAXBIB

Start harvesting with complete peace of mind


Months of work harvested in a few days...

- A tyre construction which meets your demands for reliability, load and comfort

Conventional architecture

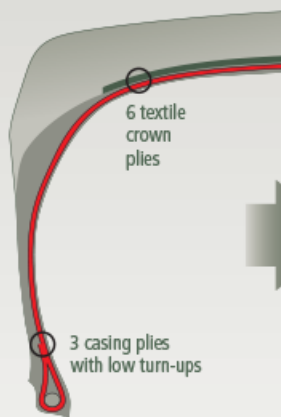

MICHELIN MEGAXBIB, an innovative construction

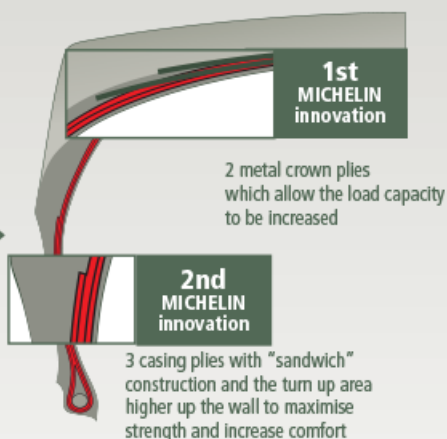

Product recognised by all manufacturers of harvest vehicles

- Reliability
- Durability





Innovative construction

- Ability to withstand heavy loads
- Unrivalled casing endurance



Sizes

1000/50 R25 TL 172A8/166D
620/75 R26 TL 166A8/166B
750/50 R26 TL 157A8/151D
750/65 R26 TL 166A8/166B
620/75 R30 TL 168A8/168B
650/75 R32 TL 172A8/172B

800/65 R32 TL 172A8/172B
800/70 R32 TL 181A8/181B
900/60 R32 TL 176A8/176B
1050/50 R32 TL 178A8
1050/50 R32 TL 178A8/172D
1050/50 R32 TL 184A8/184B
620/75 R34 TL 170A8/170B

NEW

710/75 R34 TL 178A8/178B
620/70 R38 TL 170A8/170B
520/85 R42 TL 162A8/162B
580/85 R42 TL 168A8/168B
620/70 R42 TL 166A8/166B

NEW



Characteristics of MICHELIN tyres for harvesters

MICHELIN MEGAXBIB

Ø inches	Description	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume liters	
			S mm	D mm	R' mm	R.C. mm				
25	1000/50 R25 172A8/166D TL MEGAXBIB R1	585115	1026	1657	727	4896	36.0TH	Joint R1438	1044	
26	620/75 R26 166A8/166B TL MEGAXBIB (23.1 R26)	614320	588	1602	712	4748	DW20B (A) DW18L	830	516	
	750/50 R26 157A8/151D TL MEGAXBIB	711180	759	1404	625	4163	DW25B (A)	/	459	
	750/65 R26 166A8/166B TL MEGAXBIB (28 LR26)	356328	727	1621	725	4811	DW25B (A)	833	677	
30	620/75 R30 168A8/168B TL MEGAXBIB (23.1 R30)	753673	604	1710	770	5083	DW20B (A) DW18L	737	558	

(1) The reference rim is shown in bold type.
(2) Kleber tube code.

IMPORTANT: The inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (March 2015). Technical data are subject to change without prior notice.





	Pressure (bar) and (psi) - Load per tyre in kg ⁽⁴⁾															
	Bar Psi	1,00 15	1,20 17	1,40 20	1,60 23	1,90 28	2,20 32	2,40 35	2,60 38	2,70 39	2,80 41	3,00 44	3,20 46	3,40 49	3,60 52	3,80 55
10 km/h Cyc 30 km/h Cyc. 10 km/h 30 km/h 40 km/h 65 km/h				6590 5 815	7 440 6 560	8 620 7 600	9 605 8 475	10200 9 225	10 455 9 340	10 580 9 450						
		5 815 4 145 3 875 3 230	6 525 4 655 4 350 3 655	7 240 5 160 4 825 4 075	7 950 5 670 5 300 4 500	8 740 6 230 5 825 4 875	9 225 6 580 6 150 5 150	9 450 6 740 6 300 5 300								
10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h		4 410 3 910 3 170 3 060 2 860 2 860	4 685 4 240 3 465 3 340 3 120 3 120	4 955 4 570 3 755 3 620 3 380 3 380	5 230 4 900 4 050 3 900 3 640 3 640	5 745 5 315 4 395 4 230 3 950 3 950	6 260 5 730 4 735 4 565 4 260 4 260	6 605 6 010 4 965 4 785 4 470 4 470	6 950 6 285 5 195 5 005 4 680 4 680	7 120 6 425 5 310 5 115 4 780 4 780	7 290 6 565 5 420 5 230 4 885 4 885	7 635 6 840 5 650 5 450 5 090 5 090	7 980 7 120 5 880 5 670 5 300 5 300			
10 km/h Cyc 30 km/h Cyc. 10 km/h 30 km/h 40 km/h 65 km/h				4 250 3 750 4 690 3 000 2 800 2 360	4 760 4 200 5 180 3 690 3 450 2 900	5 590 4 935 5 520 3 930 3 675 3 090	6 125 5 405 5 910 4 210 3 940 3 300	6 380 5 630 5 910 4 410 4 125 3 450	6 695 5 910 6 050 4 125 3 450	6 855 6 050 6 190 4 125 3 450	7 010 6 190 6 190 4 125 3 450					
10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h		5 010 4 600 3 860 3 720 3 480 3 480	5 480 5 000 4 145 3 995 3 735 3 735	5 950 5 400 4 435 4 275 3 995 3 995	6 420 5 800 4 720 4 550 4 250 4 250	7 125 6 385 5 155 4 970 4 645 4 645	7 835 6 975 5 590 5 390 5 040 5 040	8 305 7 365 5 880 5 670 5 300 5 300	8 775 7 755 5 880 5 670 5 300 5 300	9 010 7 950 5 880 5 670 5 300 5 300						
10 km/h Cyc 10 km/h 25 km/h 30 km/h 40 km/h 50 km/h		4 660 4 130 3 360 3 240 3 030 3 030	4 945 4 475 3 665 3 535 3 305 3 305	5 235 4 825 3 965 3 825 3 575 3 575	5 520 5 170 4 270 4 120 3 850 3 850	6 065 5 610 4 635 4 470 4 180 4 180	6 610 6 050 5 000 4 820 4 505 4 505	6 975 6 345 5 240 5 055 4 725 4 725	7 340 6 640 5 480 5 290 4 945 4 945	7 520 6 785 5 605 5 405 5 055 5 055	7 700 6 990 5 725 5 520 5 160 5 160	8 065 7 225 5 970 5 755 5 380 5 380	8 430 7 520 6 210 5 990 5 600 5 600	8 795 7 815 6 480 6 250 5 880 5 880	9 155 8 105 6 750 6 520 6 150 6 150	9 520 8 400 7 000 6 750 6 380 6 380

10: max. speed 10 km/h.

30: use on the road up to a maximum speed of 30 km/h, with empty hopper or tank.

40: use on the road up to a maximum speed of 40 km/h, with empty hopper or tank.

50: use on the road up to a maximum speed of 50 km/h, with empty hopper or tank.

65: use on the road up to a maximum speed of 65 km/h, with empty hopper or tank.

Cyclic load, use in the field only

(4) For standard or slope correction machines working on slopes of over 20% (11°), use the 10 km/h non-cyclic curve



Characteristics of MICHELIN tyres for harvesters

MICHELIN MEGAXBIB

Ø inches	Description	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume liters	
			S mm	D mm	R' mm	R.C. mm				
32	650/75 R32 172A8/172B TL MEGAXBIB (24,5 R32)	468227	657	1825	821	5423	DW21B (A) DW20B (A) DW23B (A)	831	697	
	800/65 R32 172A8/172B TL MEGAXBIB	899063	801	1840	822	5459	DW27B (A) DW25B (A) DH27B	831	903	
	800/70 R32 181A8/181B TL MEGAXBIB	695992	793	1936	871	5725	DW27B (A) DW25B (A)	831	966	
	900/60 R32 176A8/176B TL MEGAXBIB	065407	863	1894	843	5614	DW27B (A) DW30B (A)	831	1031	
	1050/50 R32 178A8 TL MEGAXBIB M28 UNIQUEMENT pour engin de récolte	236234	1038	1902	854	5649	36.00VA	Joint R2052	1250	
	1050/50 R32 178A8/172D TL MEGAXBIB T2 Pneu pour engin d'épandage	050072	1055	1858	824	5504	36.00VA	Joint R2052	1250	
	1050/50 R32 184A8/184B TL MEGAXBIB T2 Pneu pour engin d'épandage	829536	1040	1856	831	5510	36.00VA	Joint R2052	1158	

(1) The reference rim is shown in bold type.
(2) Kleber tube code.

IMPORTANT: The inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (March 2015). Technical data are subject to change without prior notice.





	Pressure (bar) and (psi) - Load per tyre in kg ⁽⁴⁾															
	Bar Psi	1,00 15	1,20 17	1,40 20	1,60 23	1,90 28	2,20 32	2,40 35	2,60 38	2,70 39	2,80 41	3,00 44	3,20 46	3,40 49	3,60 52	3,80 55
	10 km/h Cyc	4900	5440	5980	6520	7090	7665	8045	8425	8615	8805	9185	9565	9950	10330	10710
	10 km/h	4500	4980	5460	5940	6420	6895	7215	7535	7695	7855	8175	8495	8810	9130	9450
	25 km/h	3630	4085	4435	4840	5245	5645	5915	6185	6320	6450	6720	6990			
	30 km/h	3500	3890	4280	4670	5060	5445	5705	5965	6095	6220	6480	6740			
	40 km/h	3280	3640	4000	4360	4725	5090	5330	5570	5695	5815	6060	6300			
	50 km/h	3280	3640	4000	4360	4725	5090	5330	5570	5695	5815	6060	6300			
	10 km/h Cyc	5750	6535	7315	8100	8810	9525	10000	10475	10710						
	10 km/h	5250	6015	6775	7540	8060	8580	8990	9275	9450						
	25 km/h	4340	4910	5480	6050	6400	6755	6990								
	30 km/h	4180	4730	5280	5830	6170	6510	6740								
	40 km/h	3910	4425	4935	5450	5770	6090	6300								
	50 km/h	3910	4425	4935	5450	5770	6090	6300								
	10 km/h Cyc	6375	7340	8300	9265	9965	10625	11050	11390	11560	11730	12190	12650	13105	13565	14025
	10 km/h	5625	6325	7025	7725	8830	9475	9750	10050	10200	10350	10755	11160	11565	11970	12375
	20 km/h	5335	6095	6700	7380	7795	8210	8485	8900	9110	9320	9735	10150			
	25 km/h	4815	5430	6045	6660	7035	7410	7660	8035	8220	8410	8785	9160			
	30 km/h	4680	5260	5840	6420	6780	7140	7380	7740	7925	8105	8470	8830			
	40 km/h	4375	4915	5460	6000	6340	6675	6900	7240	7405	7575	7910	8250			
	10 km/h Cyc	6860	7475	8085	8700	9620	10540	11150	11765	12070						
	10 km/h	6240	6760	7280	7795	8575	9355	9870	10390	10650						
	20 km/h	5305	5795	6285	6775	7510	8245	8735								
	25 km/h	5100	5495	5895	6290	6885	7485	7880								
	30 km/h	4920	5305	5685	6070	6645	7215	7600								
	40 km/h	4600	4955	5315	5670	6205	6745	7100								
	10 km/h Cyc	7420	8225	9035	9840	10635	11425	11955	12485	12750						
	15 km/h Cyc	5350	6235	7120	8000	9330	10390	11010	11320	11475	11630					
	10 km/h	6860	7570	8280	8990	9605	10225	10635	11045	11250						
	25 km/h	5570	6195	6815	7440	7775	8110	8330								
	30 km/h	5370	5970	6570	7170	7490	7815	8030								
	40 km/h	5020	5580	6140	6700	7000	7300	7500								
	10 km/h Cyc			7865	8755	10220	11390	12070	12410	12580	12750					
	30 km/h Cyc			6940	7730	9020	10050	10650	10950	11100	11250					
	10 km/h	6940	7730	8590	9450	10350	10950	11250								
	30 km/h	4950	5510	6125	6740	7385	7815	8030								
	40 km/h	4625	5150	5725	6300	6900	7300	7500								
	65 km/h	3855	4375	4840	5300	5825	6150	6300								
	10 km/h Cyc	6800	7820	8840	9860	10710	11475	11985	12495	12750	13005	13515	14025	14450	14875	15300
	30 km/h Cyc	6240	6995	7745	8500	9045	9695	10125	10630	10885	11140	11645	12150	12600	13050	13500
	10 km/h	6000	6900	7800	8700	9450	10125	10575	11025	11250	11475	11925	12375	12750	13125	13500
	25 km/h	5135	5755	6375	6995	7495	7990	8325	8740	8950	9160	9575	9990			
	30 km/h	4950	5545	6145	6740	7220	7705	8025	8430	8630	8830	9230	9630			
	40 km/h	4625	5185	5740	6300	6750	7200	7500	7875	8065	8250	8625	9000			
	50 km/h	4625	5185	5740	6300	6750	7200	7500	7875	8065	8250	8625	9000			

10: max. speed 10km/h.

30: use on the road up to a maximum speed of 30 km/h, with empty hopper or tank.

40: use on the road up to a maximum speed of 40 km/h, with empty hopper or tank.

50: use on the road up to a maximum speed of 50 km/h, with empty hopper or tank.

65: use on the road up to a maximum speed of 65 km/h, with empty hopper or tank.

Cyc: cyclic load, use in the field only

(4) For standard or slope correction machines working on slopes of over 20% (11°), use the 10 km/h non-cyclic curve



Characteristics of MICHELIN tyres for harvesters

MICHELIN MEGAXBIB

Ø inches	Description	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume liters	
			S mm	D mm	R' mm	R.C. mm				
34	620/75 R34 170A8/170B TL MEGAXBIB (23,1 R34)	325025	590	1814	821	5398	DW20B (A) DW18L	/	612	
	710/75 R34 178A8/178B TL MEGAXBIB	543107	690	1900	848	5637	DW23B (A) MW23B (A) DW21B(A)	765	862	
38	620/70 R38 170A8/170B TL MEGAXBIB	476088	608	1864	850	5557	DW20B (A) DW18L	825	586	
42	520/85 R42 162A8/162B TL MEGAXBIB	645194	537	1937	889	5783	DW18L DD18 W18	802	544	
	580/85 R42 168A8/168B TL MEGAXBIB	241561	570	2043	920	6072	DW18L MW20B (A)	802	700	
	620/70 R42 166A8/166B TL MEGAXBIB	100268	639	1969	888	5857	DW20B (A) DW18L, MW20B (A)	802	657	

(1) The reference rim is shown in bold type.
(2) Kleber tube code.

IMPORTANT: The inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (March 2015). Technical data are subject to change without prior notice.





	Pressure (bar) and (psi) - Load per tyre in kg ⁽⁴⁾															
	Bar Psi	1,00 15	1,20 17	1,40 20	1,60 23	1,90 28	2,20 32	2,40 35	2,60 38	2,70 39	2,80 41	3,00 44	3,20 46	3,40 49	3,60 52	3,80 55
	10 km/h Cyc	5 010	5 380	5 750	6 120	6 680	7 235	7 605	7 975	8 160	8 345	8 715	9 090	9 460	9 830	10 200
	10 km/h	4 560	4 875	5 195	5 510	5 985	6 465	6 780	7 095	7 255	7 415	7 730	8 050	8 365	8 685	9 000
	25 km/h	3 710	3 980	4 245	4 515	4 915	5 320	5 585	5 855	5 990	6 125	6 390	6 660			
	30 km/h	3 580	3 840	4 095	4 355	4 740	5 130	5 385	5 645	5 775	5 905	6 160	6 420			
	40 km/h	3 350	3 590	3 830	4 075	4 435	4 795	5 035	5 275	5 400	5 520	5 760	6 000			
	50 km/h	3 350	3 590	3 830	4 075	4 435	4 795	5 035	5 275	5 400	5 520	5 760	6 000			
	10 km/h Cyc	6 260	6 725	7 185	7 650	8 345	9 040	9 505	9 970	10 200	10 430	10 895	11 360	11 825	12 285	12 750
	10 km/h	5 700	6 095	6 495	6 890	7 485	8 080	8 475	8 870	9 070	9 270	9 665	10 060	10 455	10 855	11 250
	25 km/h	4 650	4 985	5 320	5 655	6 155	6 655	6 990	7 325	7 495	7 660	7 995	8 330			
	30 km/h	4 480	4 805	5 125	5 450	5 930	6 415	6 740	7 060	7 225	7 385	7 705	8 030			
	40 km/h	4 190	4 490	4 790	5 095	5 545	5 995	6 295	6 595	6 750	6 900	7 200	7 500			
	50 km/h	4 190	4 490	4 790	5 095	5 545	5 995	6 295	6 595	6 750	6 900	7 200	7 500			
	10 km/h Cyc	5 010	5 380	5 750	6 120	6 680	7 235	7 605	7 975	8 160	8 345	8 715	9 090	9 460	9 830	10 200
	10 km/h	4 560	4 875	5 195	5 510	5 985	6 465	6 780	7 095	7 255	7 415	7 730	8 050	8 365	8 685	9 000
	25 km/h	3 710	3 980	4 245	4 515	4 915	5 320	5 585	5 855	5 990	6 125	6 390	6 660			
	30 km/h	3 580	3 840	4 095	4 355	4 740	5 130	5 385	5 645	5 775	5 905	6 160	6 420			
	40 km/h	3 350	3 590	3 830	4 075	4 435	4 795	5 035	5 275	5 400	5 520	5 760	6 000			
	50 km/h	3 350	3 590	3 830	4 075	4 435	4 795	5 035	5 275	5 400	5 520	5 760	6 000			
	10 km/h Cyc Dual	3 850	4 335	4 815	5 300	6 170	6 500	6 740	6 985	7 105						
	30 km/h Dual	2 825	3 180	3 530	3 885	4 150	4 355	4 475								
	10 km/h	3 990	4 595	5 205	5 810	6 395	6 830	7 070	7 265	7 360						
	25 km/h	3 330	3 745	4 165	4 580	4 890	5 135	5 275								
	30 km/h	3 210	3 610	4 015	4 415	4 715	4 950	5 085								
	50 km/h	3 000	3 375	3 750	4 125	4 405	4 625	4 750								
	10 km/h Cyc Dual	4 860	5 670	6 480	7 290	7 610	7 985	8 150	8 300	8 375						
	30 km/h Dual	3 350	3 765	4 175	4 590	4 845	5 105	5 275								
	10 km/h	4 875	5 685	6 500	7 310	7 635	7 960	8 175	8 325	8 400						
	25 km/h	3 940	4 430	4 920	5 410	5 710	6 015	6 215								
	30 km/h	3 800	4 270	4 745	5 215	5 510	5 805	6 000								
	50 km/h	3 550	3 990	4 435	4 875	5 145	5 420	5 600								
	10 km/h Cyc Dual	4 080	4 610	5 140	5 670	6 465	7 030	7 330	7 630	7 780	7 930					
	30 km/h Dual	3 060	3 455	3 845	4 240	4 520	4 800	4 990								
	10 km/h	4 090	4 620	5 155	5 685	6 485	7 050	7 350	7 650	7 800	7 950					
	25 km/h	3 410	3 765	4 125	4 480	4 955	5 300	5 480								
	30 km/h	3 290	3 630	3 975	4 320	4 780	5 105	5 285								
	50 km/h	3 250	3 665	4 085	4 500	4 800	5 100	5 300								

10: max. speed 10 km/h.

30: use on the road up to a maximum speed of 30 km/h, with empty hopper or tank.

40: use on the road up to a maximum speed of 40 km/h, with empty hopper or tank.

50: use on the road up to a maximum speed of 50 km/h, with empty hopper or tank.

65: use on the road up to a maximum speed of 65 km/h, with empty hopper or tank.

Cyc: cyclic load, use in the field only

(4) For standard or slope correction machines working on slopes of over 20% (11°), use the 10 km/h non-cyclic curve

