

MICHELIN® X STACKER 2 LC STACKS UP IN PERFORMANCE



REAR AXLES OF REACHSTACKER
A SMOOTH IND4 MARKED TIRE



www.michelinearthmover.com




MICHELIN® X STACKER 2 LC 18.00 R 25

STACKS UP IN PERFORMANCE


MORE ROBUST⁽¹⁾

Designed to address very severe usages (speed, load combination) on reachstackers rear axle

MICHELIN® X STACKER 2 18.00 R 25

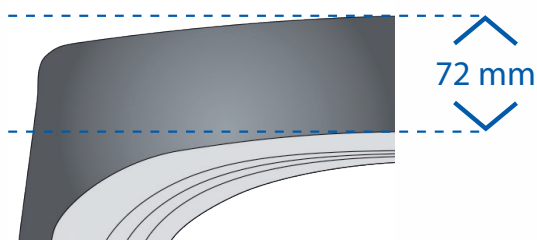

MICHELIN® X STACKER 2 LC 18.00 R 25

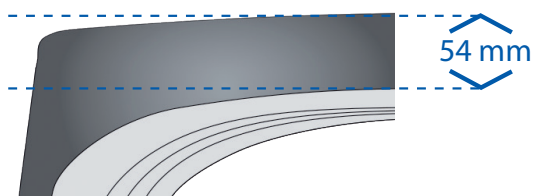

+8.6%
INTERNAL AIR
VOLUME⁽²⁾

-25%
TREAD
THICKNESS⁽¹⁾

- Less rubber for a cooler tire
- More internal air volume for an improved resistance to load

TECHNICAL CHARACTERISTICS

COMMERCIAL DESCRIPTION	Max. dist./ hour km Miles	DIMENSIONAL CHARACTERISTICS (3)							Measuring Recommended Rim Approved Rims (3)	Tubeless Seal CAI (3)	Tube Type Tube Ref. Flap (3)
		Michelin dimensions									
		e	D	R'	RC	Tread depth	Dual spacing	Cap.			
		mm	mm	mm	mm	mm	mm	l			
		inches	inches	inches	inches	32 ^d	inches	galon			

18.00 R 25 X STACKER2 LC TL 207 A5 Tubeless

MICHELIN® X STACKER 2 LC 207A5 042180	11 6.8	501 19.7	1656 65.2	750 29.5	5006 197.1	54 68	612 24.1	505 133.5	13.00/2.5 15.00/2.5	OR 3-25 SULLA 553200	25 WAM 16-24/25 ⁽¹⁾
---	-----------	-------------	--------------	-------------	---------------	----------	-------------	--------------	------------------------	-------------------------	-----------------------------------

MICHELIN® X STACKER2 LC 18.00 R 25 TL 207 A5 Tubeless CAI 042180

(1) 18.00 R25 MICHELIN® X STACKER 2 tread depth is 72 mm and 18.00 R25 MICHELIN® X STACKER 2 LC tread depth is 54 mm

(2) 18.00 R25 MICHELIN® X STACKER 2 air volume is 465 Liters an 18.00 R 25 MICHELIN® X STACKER 2 LC air volume is 505 liters

(3) More information in Michelin Databook 2017.