

MICHELIN® SPRAYBIB™



HIGH LOAD CAPACITY FOR SPRAYERS

EXCEPTIONAL LOAD CAPACITY

- +16% load vs IF Tire for the same pressure.¹
- 40% more load carrying capacity versus standard radial.

SOIL PROTECTION

- 25% lower air pressure for the same load as an IF tire.¹
- VF Very High Flexion Tire - carries same loads at 40% less pressure than standard radial tire.
- 4% yield gains using Michelin Ultraflex tires.²

COMFORT

- Low pressures through Michelin Ultraflex sidewalls allows for superior driver comfort.
- Maximum stability at speeds up to 40 mph.

LONG TIRE LIFE

- Optimized tread design and increased stubble resistance.
- Reinforced sidewalls and bead zones offer increased casing endurance and tread life.



Sprayers



Tow-Behind Sprayers

(1) Internal test 2015 (Ladoux - France).
(2) Harper Adams University 2014/2016.



MICHELIN

MICHELIN® SPRAYBIB™ FEATURING ULTRAFLEX™ TECHNOLOGY

Longer footprint

- Reduced soil rutting and optimized yields
- Better grip




Revolutionary casing with MICHELIN Ultraflex Technologies

Reinforced tread design

- Longer service life
- Increased stubble resistance

ADDITIONAL LOAD CAPACITY

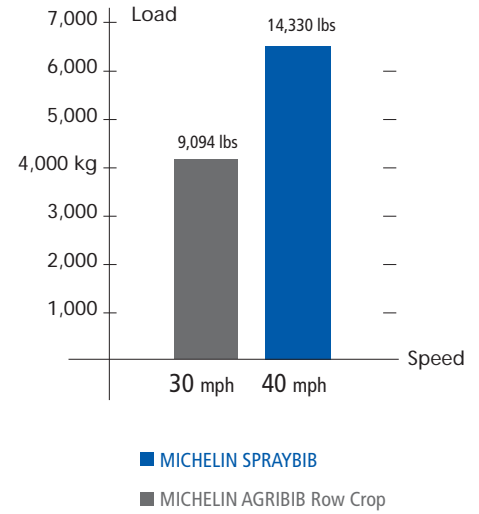

Up to 57%

Additional load

Size	I.S.O. Index	Product Code	Max Inflation Pressure (psi)	Max Load	Section Width (in)	Overall Dia. (in)	Rolling Circum. (in)	RCI	Tread Depth (32nds)
VF 320/90R42	163D	44635	64	10,750	12.7	64.8	193.8	44	45
VF 480/80R42	176D	13814	52	15,655	19.3	72.4	215.4	46	48
VF 380/90R46	173D	27358	64	14,330	15.1	72.5	217.7	46	48
VF 480/80R46	177D	21151	52	16,095	19.1	76.5	228	47	48
VF 380/90R50	175D	28608	64	15,210	15.1	76.8	229.8	47	48
VF 420/95R50	177D	82545	52	16,095	16.7	80.8	240.9	48	48
VF 480/80R50	179D	50045	52	17,085	19.1	80.5	240.2	48	48
VF 380/90R54	176D	47923	64	15,655	15.1	80.7	241.4	-	47



MichelinAG.com

