

# **MICHELIN® X STACKER 2 LC** **STACKS UP IN PERFORMANCE**



REAR AXLES OF REACHSTACKER  
A SMOOTH IND4 MARKED TIRE



[www.michelinearthmover.com](http://www.michelinearthmover.com)




# MICHELIN® X STACKER 2 LC 18.00 R 25

## STACKS UP IN PERFORMANCE


### MORE ROBUST<sup>(1)</sup>

Designed to address very severe usages (speed, load combination) on reachstackers rear axle

#### MICHELIN® X STACKER 2 18.00 R 25

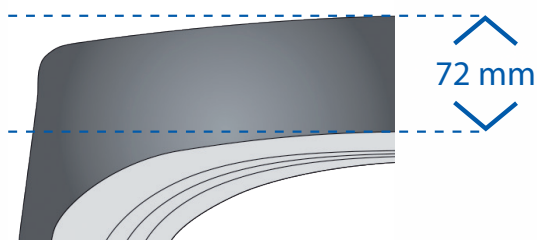

#### MICHELIN® X STACKER 2 LC 18.00 R 25

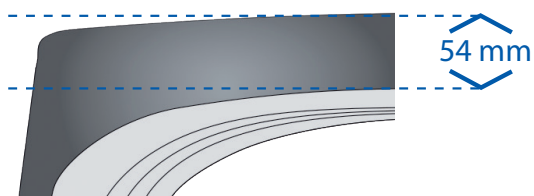

**+8.6%**  
INTERNAL AIR  
VOLUME<sup>(2)</sup>

**-25%**  
TREAD  
THICKNESS<sup>(1)</sup>

- Less rubber for a cooler tire
- More internal air volume for an improved resistance to load

## TECHNICAL CHARACTERISTICS

COMMERCIAL DESCRIPTION	Max. dist./ hour km Miles	DIMENSIONAL CHARACTERISTICS (3)							Measuring Recommended Rim Approved Rims (3)	Tubeless Seal CAI (3)	Tube Type Tube Ref. Flap (3)
		Michelin dimensions									
		e	D	R'	RC	Tread depth	Dual spacing	Cap.			
Types CAI (Part Number)		mm	mm	mm	mm	mm	mm	l			
		inches	inches	inches	inches	32 <sup>nd</sup>	inches	galon			

18.00 R 25 X STACKER2 LC TL 207 A5 Tubeless

MICHELIN® X STACKER 2 LC 207A5 042180	11 6.8	501 19.7	1656 65.2	750 29.5	5006 197.1	54 68	612 24.1	505 133.5	13.00/25 15.00/25	OR 3-25 SULLA 553200	25 WAM 16-24/25 <sup>(1)</sup>
--	-----------	-------------	--------------	-------------	---------------	----------	-------------	--------------	----------------------	-------------------------	-----------------------------------

MICHELIN® X STACKER2 LC 18.00 R 25 TL 207 A5 Tubeless CAI 042180

(1) 18.00 R25 MICHELIN® X STACKER 2 tread depth is 72 mm and 18.00 R25 MICHELIN® X STACKER 2 LC tread depth is 54 mm  
 (2) 18.00 R25 MICHELIN® X STACKER 2 air volume is 465 Liters an 18.00 R 25 MICHELIN® X STACKER 2 LC air volume is 505 liters  
 (3) More information in Michelin Databook 2017.