

MICHELIN®

LTX® A/T2

A Light Truck and SUV all-terrain tire with a compound designed to resist chipping and tearing, providing excellent durability when the pavement ends.



ALL-SEASON TIRE

**60,000 Mile Limited Warranty ¹**

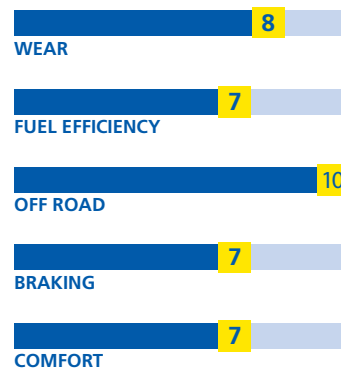
The optimized contact patch shape, provided by MaxTouch Construction™, helps deliver extremely long tire life under the toughest conditions.

35% Longer Life on Gravel ²

Tough off-road endurance capability of the MICHELIN® LTX® A/T2 tire helps it last at least 35% longer on gravel than two leading class competitors.

Very Comfortable Ride

MICHELIN® Comfort Control Technology™ uses computer-optimized design and precision manufacturing to offer greatly reduced vibrations and road noise.

**Popular Replacement Market Fitments:**

Toyota Tundra

Ford F-Series

Chevrolet Silverado

GMC Sierra

Ram Trucks

¹ See Michelin Owner's Manual for complete description.

² Based On Michelin internal gravel endurance test results versus Bridgestone® Dueler™ A/T Revo 2 and Goodyear® Wrangler® Silent Armor tires on LT 265/70R17. Actual on-off road results may vary.



MICHELIN® LTX® A/T2

Tire Size	Service Description	Limited Warranty	Side-wall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/ Mile @45 mph	Max Load Single (lbs@psi)	UTQG	O.E. Fit-ments
P245/75R16	109S	60K	ORWL	02399	6.5 - 8	9.8 on 7	30.5	14	683	2065@44	500/A/B	
P265/70R16	111S	60K	ORWL	21267	7 - 9	10.7 on 8	30.6	14	679	2185@44	500/A/B	
245/65R17	107S	60K	ORWL	47965	7 - 8.5	9.8 on 7	29.5	14	704	1954@44	500/A/B	
265/65R17	112S	60K	ORWL	97614	7.5 - 9.5	10.7 on 8	30.6	14	681	2244@44	500/A/A	
P265/70R17	113S	60K	ORWL	67236	7 - 9	10.7 on 8	31.7	14.5	657	2305@44	500/A/B	
P275/65R18	114T	60K	BSW	06841	7.5 - 9.5	11 on 8	32.1	13	648	2365@51	500/A/B	TOY
275/55R20	113T	60K	BSW	21011	7.5 - 9.5	11.2 on 8.5	31.9	14	652	2304@44	500/A/B	
P275/60R20	114S	60K	BSW	36429	7.5 - 9.5	11 on 8	33	14	630	2365@44	500/A/B	
LT245/75R16/E	120R	60K	BSW	52691	6.5 - 8	9.8 on 7	30.5	16	683	3042@80		
LT265/75R16/E	123R	60K	RWL	03869	7 - 8	10.5 on 7.5	31.7	16	657	3415@80		
LT235/80R17/E	120R	60K	BSW	35847	6 - 7.5	9.3 on 6.5	31.8	13.5	654	3085@80		
LT245/75R17/E	121R	60K	BSW	06682	6.5 - 7.5	9.8 on 7	31.5	12.5	660	3195@80		FOR
LT245/75R17/E	121R	60K	ORWL	21691	6.5 - 7.5	9.8 on 7	31.5	12.5	660	3195@80		FOR
LT265/70R18/E	124R TPC	60K	BSW	09068	7 - 9	10.7 on 8	32.6	12.5	637	3525@80		GM
LT245/75R17/E	121R	60K	ORWL	33918	6.5 - 7.5	9.8 on 7	31.5	16	660	3195@80		
LT265/70R17/E	121R	60K	RWL	69422	7 - 8.5	10.7 on 8	31.7	12.5	657	3195@80		FOR
LT265/70R17/E	121R	60K	ORWL	67198	7 - 8.5	10.7 on 8	31.7	16	657	3195@80		
LT285/70R17/D	121R	60K	ORWL	74167	7.5 - 9	11.5 on 8.5	32.8	16	635	3195@65		
LT265/70R18/E	124R TPC	60K	BSW	07787	7 - 9	10.7 on 8	32.6	12.5	637	3525@80		GM
LT275/65R18/E	123R	60K	ORWL	03822	7.5 - 9	11 on 8	32.1	16	648	3415@80		
LT275/70R18/E	125R	60K	ORWL	71991	7 - 8.5	11.2 on 8	33.2	14.5	628	3640@80		FOR
LT275/70R18/E	125R TPC	60K	BSW	32157	7 - 8.5	11 on 8	33.2	12	627	3640@80		GM
LT285/65R18/E	125R	60K	RWL	09247	8 - 10	11.5 on 8.5	32.6	16	639	3640@80		
LT275/65R20/E	126R	60K	ORWL	04238	7.5 - 9.5	11 on 8	34.1	14	610	3750@80		FOR
LT285/55R20/E	122R	60K	BSW	16270	8 - 10	11.7 on 9	32.4	16	643	3305@80		