


X One® Tire Mounting on Different Wheels

The 14.00 x 22.5" (15 - degree bead seat) drop center tubeless wheel required for the X One® tire has differently styled drop centers depending on the manufacturer.

Accuride aluminum and steel wheels as well as **Hayes – Lamerz** steel wheels are produced with a narrow ledge on one side and a long tapered ledge on the other. The narrow ledge is necessary to ease the mounting and dismounting process.

The **Alcoa** aluminum wheel is manufactured with a narrow ledge on either side. This allows it to be mounted and dismounted from either side.


Before mounting the tire check the brand of the wheel and locate the short side or narrow ledge. The tire must always be mounted and dismounted from the short side (narrow ledge) of the wheel. Failure to do so could result in damage to the wheel, the tire or both!

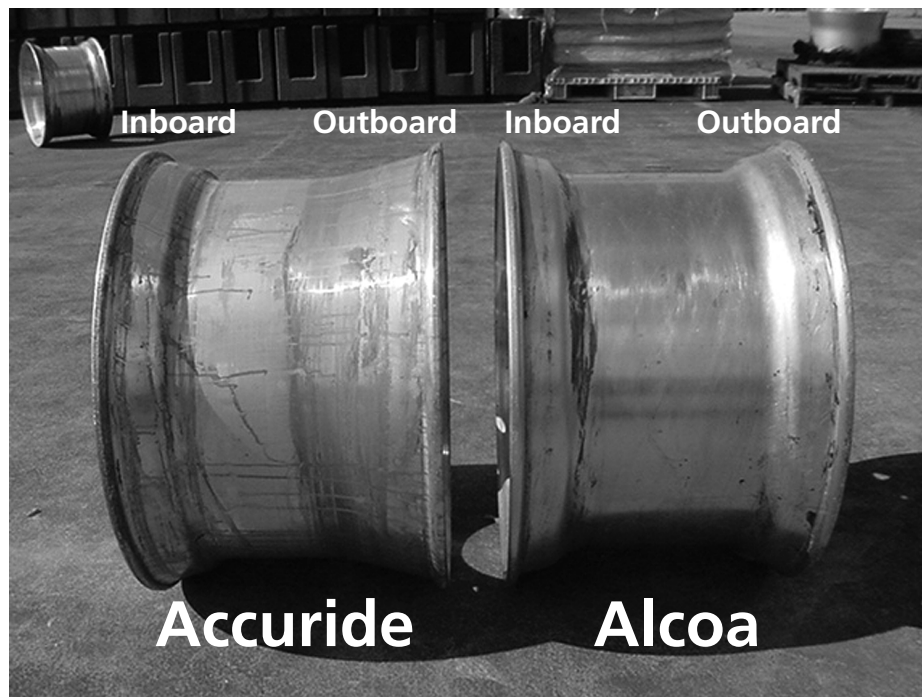

See wheel cross section on back of bulletin.



Tire Mounting on the Accuride 22.5 x 14.00 29660 Wheel

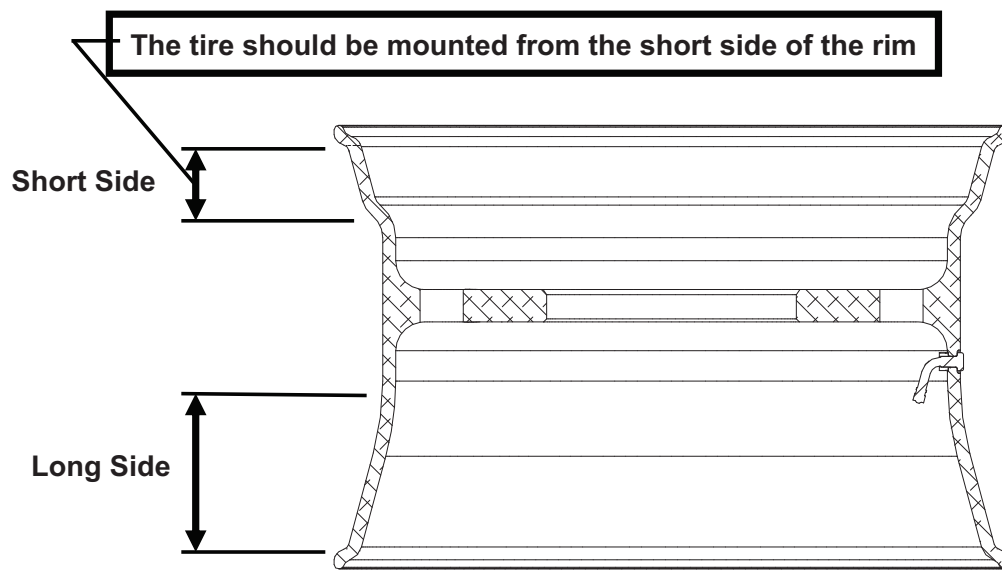

29660 Aluminum Wheel

Printed with permission from Accuride Corporation.

For additional information, please contact your local Michelin sales representative or contact Michelin using the website at www.michelintruck.com.

www.michelintruck.com

To order more brochures, please call Promotional Fulfillment Center 1-800-677-3322, Option #2

Monday through Friday, 9 a.m. to 5 p.m. Eastern Time

MICHELIN NORTH AMERICA, INC., Greenville, South Carolina, USA

MICHELIN NORTH AMERICA (CANADA) INC., Laval, Quebec, Canada

MICHELIN MEXICO S.A. DE C.V., Querétaro, Mexico

Copyright ©2008 Michelin North America, Inc. All rights reserved. An Equal Opportunity Employer. MWT43495 (05/08)