

MICHELIN® CEREXBIB® 2

**OUTSTANDING PRODUCTIVITY
AND SOIL PROTECTION**



***A HIGH LOAD CAPACITY TIRE WITH LOW PRESSURE
ON THE FIELD, FOR LARGE HARVESTING MACHINERY***

LOW PRESSURES FOR LESS SOIL COMPACTION

EXCELLENT TRACTION

STEEL CROWN BELTS

EXCEPTIONAL PRODUCTIVITY



Combines




MICHELIN® CEREXBIB® 2 TIRE

HIGH LOAD CAPACITY WITH LOW PRESSURE

Productivity




Low pressure on the field

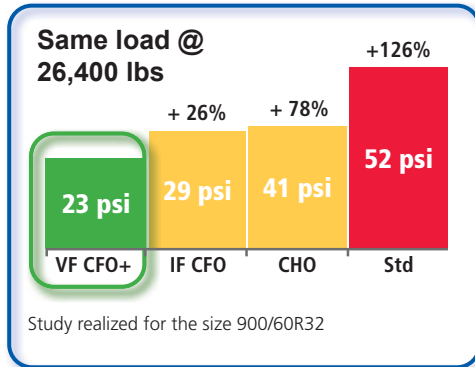


Soil Protection



Traction & Flotation



Excellent load capacity in the field

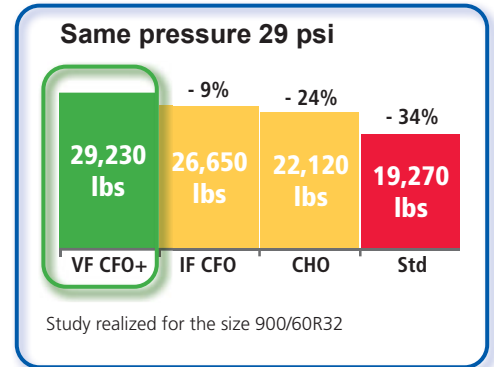

Up to 15% footprint on the fields

- +15% vs IF CFO MICHELIN CEREXBIB
- +35% vs MICHELIN MEGAXBIB
- Better traction and flotation
- Better soil protection and less compaction

Study realized for the size 900/60R32

Experienced design for harvesting machines

Tire developed and designed by leading harvest machine manufacturers

AIR SYSTEMS READY

Tire compatible with the central tire inflation systems



MICHELIN ULTRAFLEX TECHNOLOGIES

Better soil protection
Less compaction
Excellent Traction capacity



HIGH TRACTION

Better traction on slopes
Ability to work on wet soil



The MICHELIN CFO+ norm allow to carry more load at 10km/h cyclic on the fields



Size	I.S.O. Index	Product Code	Equivalent Size	Max Inflation Pressure (psi) Harvest Operation	Max Load	Section Width (in)	Overall Dia. (in)	Rolling Circum. (in)	RCI	Tread Depth (32nds)
VF 520/80R26 CFO+	168A8	24394	41	17,800	19.8	58.7	173.2	—	56	56
VF 620/70R26 CFO+	173A8	98039	41	20,990	23.9	59.6	175.6	42	57	57
VF 750/65R26 CFO+	180A8	33777	41	25,860	29.4	63.8	188.4	—	61	61
VF 520/85R30 CFO+	172A8	86907	41	20,425	20.6	63.9	188.9	46	58	54
VF 620/70R30 CFO+	175A8	53106	41	22,485	23.9	63.6	187.6	—	54	58
VF 710/65R30 CFO+	179A8	22560	41	25,110	27.3	66	195	—	58	72
IF 800/65R32 CFO+	181A8	25367	41	30,920	30.4	73	216.6	46	72	74
IF 800/70R32 CFO+	185A8	71535	41	34,670	31.3	76.8	228.3	—	69	69
VF 900/60R32 CFO+	191A8	73624	41	34,670	33.7	75	221.2	—	73	58
VF 500/85R34 CFO+	172A8	29877	41	19,865	19.6	66	195.3	—	58	74
IF 680/80R38 CFO+	182A8	20691	41	31,855	25.4	79.5	237.4	—	74	73
VF 900/60R38 CFO+	193A8	31193	41	37,480	34.6	79.9	235.9	48	73	—
IF 800/70R38 CFO+	187A8	25474	41	36,540	31.1	80.7	239.3	—	72	—
VF 520/85R42 CFO+	177A8	15337	41	20,780	21.3	76.9	228.6	47	69	73
VF 580/80R42 CFO+	183A8	45547	41	28,110	22.8	80.3	237.8	—	73	79
VF 710/70R42 CFO+	188A8	60118	41	31,855	27.8	82.6	244.4	—	81	72
IF 800/70R42 CFO+	1889A8	91180	41	38,605	30.3	83.4	251.5	—	73	71
VF 900/60R42 CFO+	195A8	03717	41	38,605	33.2	83.4	247.3	—	74	81

MichelinAG.com

