

MICHELIN®
X[®]TRA LOADPROTECT™
21.00R33 A4/B




EASY LIFE
IN HARD CONDITIONS



MICHELIN[®]
X[®]TRA LOADPROTECT[™]

21.00R33 A4/B


Get excellent protection in aggressive, sharp
surface conditions with the MICHELIN[®]
X[®]TRA LOADPROTECT[™] 21.00R33 A4/B tyre.

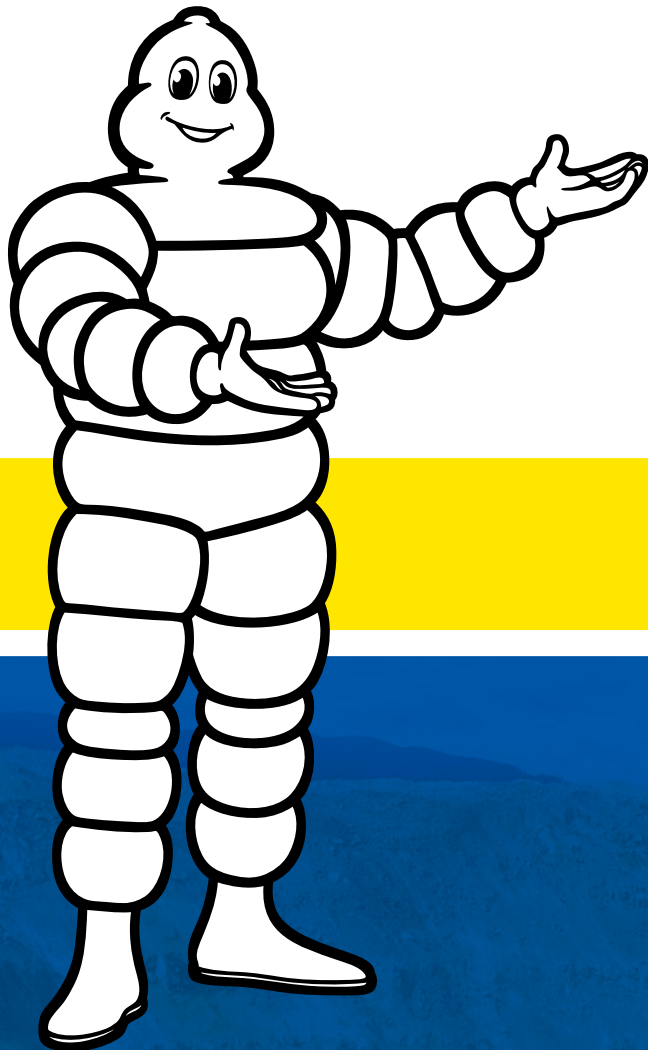





+10% MORE LOAD-CARRYING CAPACITY¹

Increase your tyre load capacity due to a reinforced *** casing



+15.5 T
at 7.25 bar vs.
TRA 8 bar



+14.0 T
at 6.5 bar for
MICHELIN®
and 7 bar for
Bridgestone®

1) Compared to the Bridgestone® VMTP and VRLS tyres and the MICHELIN® X-HAUL® S tyres in size 21.00R33. Actual results may vary. (Sources: Bridgestone® OTR 2018 Data Book and MICHELIN® 2017 Data Book)



MORE DISTANCE IN AN HOUR¹ AND A HIGHER TKPH¹

Drive up to 34 km
in an hour due to a
cooler running tyre²

A4 COMPOUND

+15.8% More distance in 1 hour¹
+9.3% Higher TKPH¹

B COMPOUND

+36% More distance in an hour¹
+69% More TKPH¹

1) Compared to the MICHELIN® X-HAUL® S tyre in size 21.00R33. Actual results may vary.
TKPH = Tons Kilometer Per Hour
2) Compared to the MICHELIN® X-HAUL® S tyre in size 21.00R33 and based on field tests measurements and FARO-method measurements certified by the Michelin® Center of Technology. Actual results may vary.



+8% LONGER WEAR LIFE AND A REVOLUTIONARY TREAD PATTERN¹

- A greater volume of tread rubber¹
- Optimised contact patch with the ground
- Cables made of steel encapsulated by rubber prevent corrosion spread, thus increasing aggression resistance
- Interlocking blocks of rubber on the shoulder

1) Compared to the MICHELIN® X-HAUL® S tyre in size 21.00R33 and based on field tests measurements and FARO-method measurements certified by the Michelin® Center of Technology. Actual results may vary.

TECHNICAL CHARACTERISTICS

COMMERCIAL DESCRIPTION Types CAI (Part Number)	Max. dist./ hour km Miles	TKPH	DIMENSIONAL CHARACTERISTICS Michelin Dimensions						Measuring Rim Approved Rims	Tubeless Seal CAI	Tube Type Ref	
			e mm inches	D mm inches	R' mm inches	RC mm inches	Tread Depth mm 32nd	Dual Spacing mm inches			Cap. liter gallon	Flap
MICHELIN® X ^{TRA} LOAD ^{PROTECT} ™ 21.00R33 B *** E4 495016	34 21.1 If Load per tyre ≤ 14Tn	384	565 22.2	1979 77.9	895 35	5981 236	54 68	701 27.6	859 30.3	13.00/2.5	OR 3-33	/
	31 19.3 If Load per tyre > 14Tn											
MICHELIN® X ^{TRA} LOAD ^{PROTECT} ™ 21.00R33 A4 *** E4 167639	22 13.7 If Load per tyre ≤ 14Tn	248	565 22.2	1979 77.9	895 35	5981 236	54 68	701 27.6	859 30.3	13.00/2.5	OR 3-33	/
	20 12.4 If Load per tyre > 14Tn											

TREAD TYPE	Explanations on how to choose the tyre and determine the inflation pressures. Refer to explanations and methods on how to determine the inflation pressure.											
	Machine - Use	bar	4	4.5	5	5.5	6	6.5	7	7.25	7.5	8
		psi	58	65	73	80	87	94	102	105	109	116
MICHELIN® X ^{TRA} LOAD ^{PROTECT} ™ 21.00R33 B *** E4 MICHELIN® X ^{TRA} LOAD ^{PROTECT} ™ 21.00R33 A4 *** E4	Transport Load per tyre ≤ 14Tn	Standard	9315 20536	10250 22597	11185 24658	12125 26731	13065 28803	14000 30865	-	-	-	-
MICHELIN® X ^{TRA} LOAD ^{PROTECT} ™ 21.00R33 B *** E4 MICHELIN® X ^{TRA} LOAD ^{PROTECT} ™ 21.00R33 A4 *** E4	Transport Load per tyre > 14Tn	Standard	-	-	-	-	-	-	15000 33069	15500 34172	15867 34981	16600 36597

* Reference MICHELIN® Data Book 2019 for more information.



Copyright ©2020 Michelin North America, Inc. All Rights Reserved.
The Michelin Man is a registered trademark owned by Michelin North America, Inc.

