



LINE HAUL APPLICATIONS

THE MICHELIN® X ONE® LINE ENERGY D TIRE

Leading SmartWay® fuel economy⁽¹⁾ and improved mileage in a next generation wide base single drive tire for line haul applications.

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Recommended Acceptable



(1) Based on industry standard rolling resistance testing of comparable tires or retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.



THE MICHELIN® X ONE® LINE ENERGY D TIRE

Leading SmartWay® fuel economy⁽¹⁾ and improved mileage in a next generation wide base single drive tire for line haul applications.



Leading SmartWay® Fuel Economy

No compromise fuel economy

• Dual Energy Compound Tread

Fuel and Mileage Layer

- Precisely balanced tread compound delivers fuel efficiency as well as exceptional wear properties (Top Layer).

Fuel and Durability Layer

- Cool running tread rubber minimizes internal casing temperatures for low rolling resistance and extended casing life (Bottom Layer).

Extended Mileage

15% longer tread life⁽²⁾

• Dual Energy Compound Tread


Top layer improves wear resistance.

• Wide footprint and solid shoulder

Distributes force for reduced wear.

• Infini-Coil™ Technology


Incorporates 1/4 mile of steel cable to help eliminate casing growth and ensure a consistent footprint.

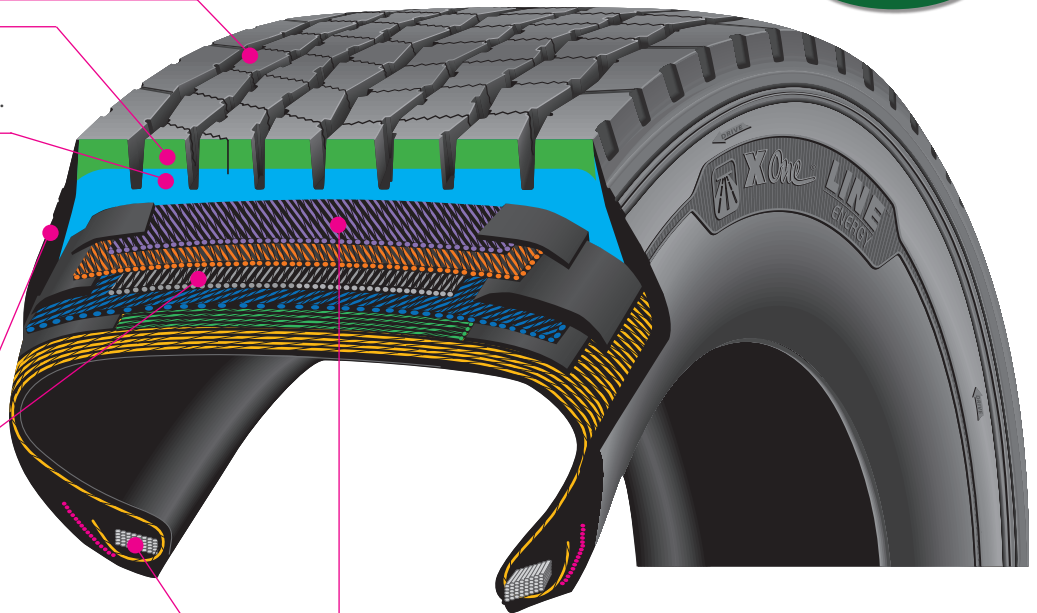

Driver Confidence

Outstanding traction with Matrix siping.

- **Matrix siping** provides inter-locking action which offers excellent traction and even wear.
- **Zig-Zag groove walls** provide optimized biting edges and excellent water and snow evacuation.
- **Full depth sipes** provide excellent traction throughout the life of the tread.



Extended Casing Life

Longer life and retreadability.

• Full-width elastic protector ply

Michelin exclusive.

• Rectangular bead bundle

A Michelin exclusive – simulates a solid steel rod “strapping” the tire onto the wheel. This design stabilizes the entire bead region and minimizes fatigue in order to extend casing life.

• Dual Energy Compound Tread

Cooler running tire.

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (+)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheel	Revs Per Mile	Max. Load and Pressure Single			
				mph	kph	in.	mm	in.	mm	in.	mm			lbs.	psi	kg.	kPa
445/50R22.5 ⁽³⁾	L	79781	24	75	120	18.6	471	40.2	1021	17.1	435	14.00	517	10200	120	4625	830

(1) Based on industry standard rolling resistance testing of comparable tires or retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.

(2) Compared to 445/50R22.5 MICHELIN® X ONE® XDA® ENERGY tire using GST/FE testing.

(3) Directional tread design.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit business.michelinman.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE
US: business.michelinman.com
CA: michelintruck.com/en_CA

FIND US ON FACEBOOK
[michelintruck](https://www.facebook.com/michelintruck)

VISIT US ON THE WEB
US: business.michelinman.com/contact-us
CA: michelintruck.com/en_CA/contact-us

CONTACT US BY TELEPHONE
US: 1-888-622-2306
CA: 1-888-622-2306