



REGIONAL APPLICATIONS

THE MICHELIN® XDS® 2 (19.5") TIRE

Drive axle radial for year round traction, optimized for winter conditions and limited all-position service in regional and on/off road applications.


Line Haul	Regional	Urban	On/Off Road
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☒ Recommended ☐ Acceptable



THE MICHELIN® XDS® 2 (19.5") TIRE

The drive axle radial for year round traction, optimized for winter conditions and limited all-position service in regional and on/of road applications.

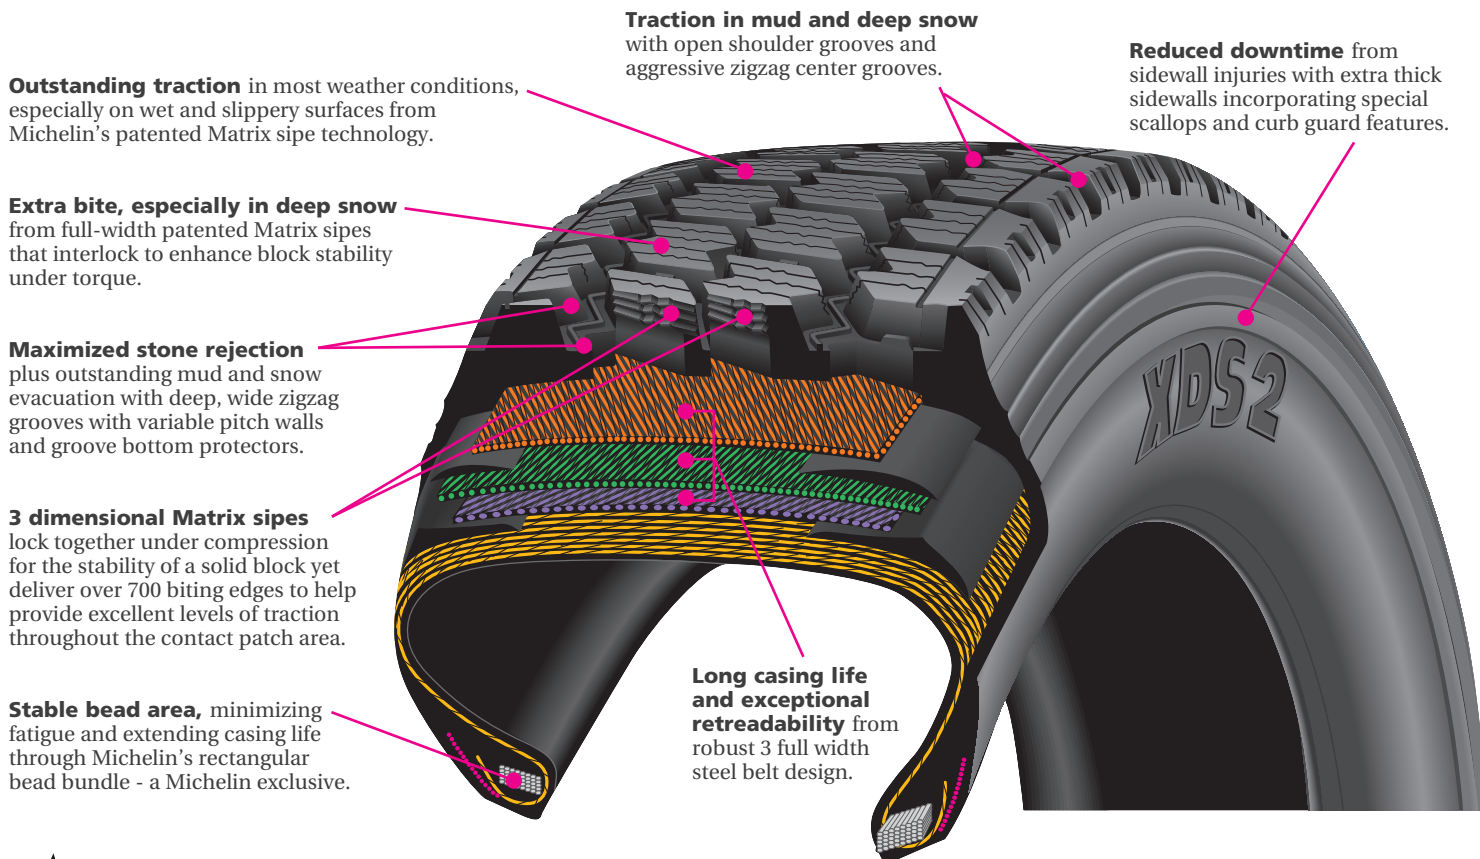

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	kph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
225/70R19.5	G	24975	18	87	140	15.2	387	32.3	821	9.2	234	6.75, 6.00	10.0	254	638	3970	110	1800	760	3750	110	1700	760
245/70R19.5	H	23134	19	75	120	15.7	400	33.6	854	9.7	247	6.75, 7.50	10.7	272	615	4940	120	2240	830	4675	120	2120	830

Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

(1) 3PMSE (3 Peak Mountain Snow Flake) is from European R117 regulation. It has no regulatory Truck Tire reference in N.A. The tire must score at least 25% better in deep snow traction than the Standard Reference Test Tire on an ECE certified ISO test procedure. 3PMSE always appears with "M+S" mark

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit business.michelinman.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.



TO FIND OUT MORE

US: business.michelinman.com

CA: michelintruck.com/en_CA



FIND US ON FACEBOOK

[michelintruck](https://michelintruck.com)



VISIT US ON THE WEB

US: business.michelinman.com/contact-us

CA: michelintruck.com/en_CA/contact-us



CONTACT US BY TELEPHONE

US: 1-888-622-2306

CA: 1-888-622-2306

Michelin North America Inc., One Parkway South, Greenville, SC 29615

Michelin North America (Canada) Inc., 2500 Daniel Johnson Blvd., Suite 500, Laval (QC) H7T 2P6

Copyright © 2021 MNA(C). All rights reserved.

Copyright © 2021 Michelin North America, Inc. All rights reserved. An Equal Opportunity Employer PDF Only (07/21)