




MICHELIN

PERFORMANCE FULLY LOADED

*TYRE THAT WILL SURPASS
ALL YOUR DEMANDS FOR
DEMANDING USAGE.*

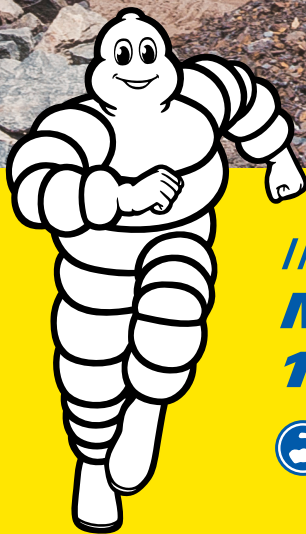

INTRODUCING MICHELIN 11.00R20 XZY3




ENHANCED DURABILITY
25% Better bead strength
10% Better sidewall endurance



**HIGHER
TYRE MILEAGE**



MICHELIN 11.00R20 XZY3



SEMI-LUG PATTERN DESIGN

- Suitable for all position fitment




DECREASING CASING CABLE PITCH

- Improved road hazard resistance




60%* HIGHER IN METAL MASS IN BEAD CORE

- Improved bead endurance by 25%*

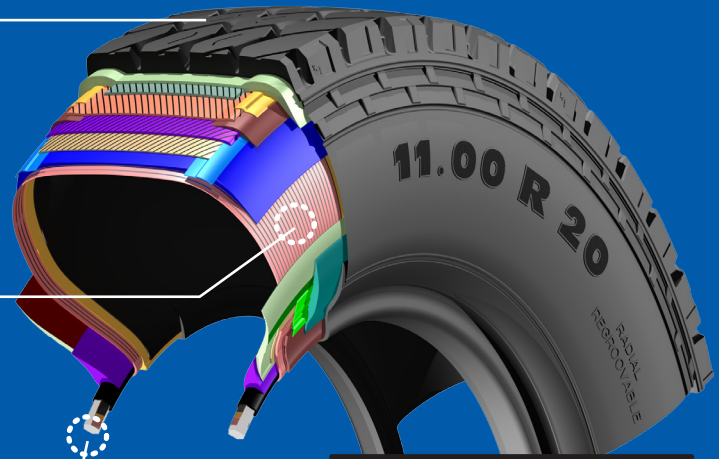

TYRE USAGE RANGE

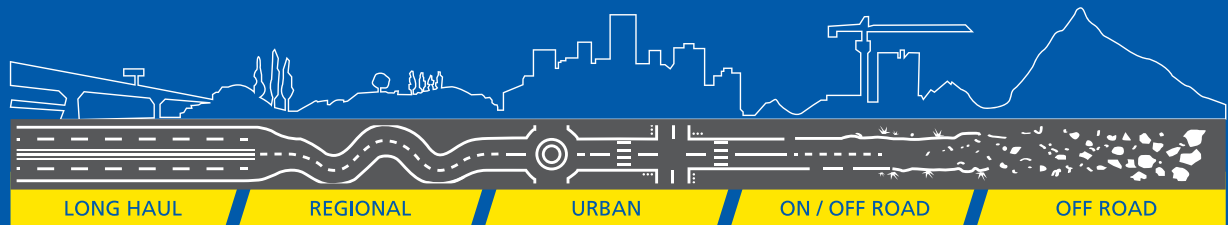

11.00R20 XZY3



Technical Specifications

Size	Load/Speed index	PR	Load/Tyre in kg (S/D)	Max. speed (km/hr)	Max. inflation pressure		Overall diameter (mm/in)	Section width (mm/in)	Recommended rim width (in/cm)	Tread depth (mm/in)
					bar	PSI				
11.00R20 XZY3	150/146K	16	3350/3000	110	8.0	116	1090/42.9	298/11.7	8X20	17.5/0.6

*In comparison to old 11.00R20 XZY3

Warning: Serious or fatal injury may result from tyre failure due to incorrect selection, fitting, usage or maintenance of tyres. To ensure correct selection, fitment, usage and maintenance, refer to the Michelin Truck and Bus Tyre Service Manual (Asia-Pacific edition) – available at a Michelin Tyre dealer. Please consult a tyre professional for all tyre related issues.

All Michelin tyres are subject to Michelin standard warranty terms and conditions. For further details please visit or log on to www.michelintransport.in



MICHELIN