



**LOOKING FOR
LOWEST OPERATING COST?
CHALLENGE ACCEPTED.**

2.5LAC* KMS
GUARANTEE


**MORE
LOAD**

BETTER
FUEL
SAVINGS

SUPERIOR
TYRE
MILEAGE

DESIGNED
FOR NEW
AXLE LOAD

*T&C apply

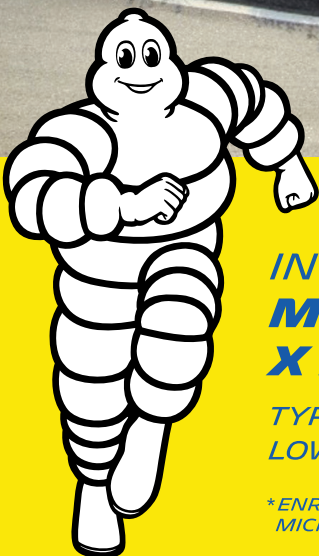

**INTRODUCING
MICHELIN 295/90R20
X MULTI Z & D**

TYRE LINE THAT DELIVERS
LOWEST COST OF OPERATIONS.

*ENROLL YOUR VEHICLE UNDER
MICHELIN VALUE OFFER TO AVAIL THIS GUARANTEE



295/90R20 X MULTI Z & D



UNIQUE CROWN ARCHITECTURE WITH SUPER HIGH TENSILE STEEL CABLES

- Improves road hazard performance



INNOVATIVE SUPER SLOW WEAR RATE TREAD RUBBER COMPOUND

- Increases tyre life




COMPACT REGENERATING TREAD PATTERN

- Even wear & increased tyre life




SMART BEAD CONSTRUCTION

- Improved retreadability

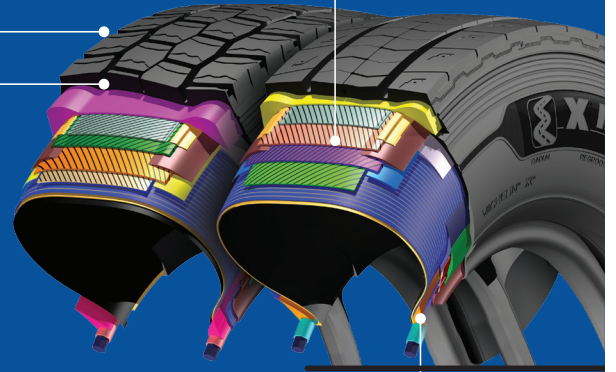

TYRE USAGE RANGE

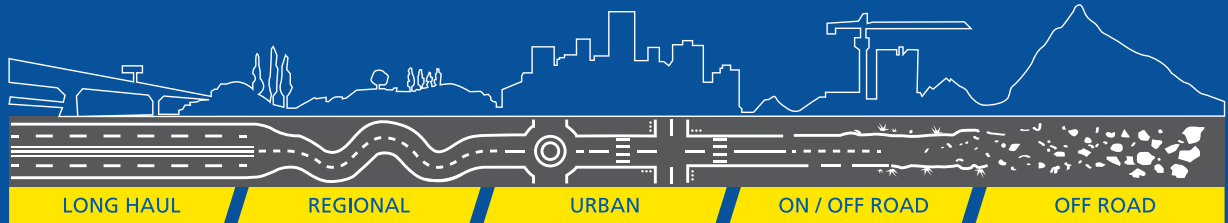

295/90R20 X MULTI Z & D



TECHNICAL SPECIFICATIONS

Size	Load/Speed Index	LR	Load/Tyre in Kg (S/D)	Max. Speed (km/hr)	Max Inflation Pressure (PSI)		Overall Diameter (mm/in)	Section Width (mm/in)	Recommended Rim Width (in)	Tread Depth (mm/in)
					Bar	PSI				
295/90 R 20 X Multi Z	152/148J	H	3550/3150	100	8.50	123	1049/41.29	279/10.98	7.5X20	16/0.62
					Bar	PSI				
295/90 R 20 X Multi D	152/148J	H	3550/3150	100	8.50	123	1059/41.69	279/10.98	7.5X20	19/0.74

*In comparison to all competitor tyres of same size and based on internal rolling resistance data of MICHELIN and competitor tyres.

** In comparison to leading competitor's tyre of same size and based on internal rolling resistance data of MICHELIN and competitor tyres.

⚠ Warning: Serious or fatal injury may result from tyre failure due to incorrect selection, fitting, usage or maintenance of tyres. To ensure correct selection, fitment, usage and maintenance, refer to the Michelin Truck and Bus Tyre Service Manual (Asia-Pacific edition) - available at a Michelin Tyre dealer. Please consult a tyre professional for all tyre related issues.

All Michelin tyres are subject to Michelin standard warranty terms and conditions. For further details please visit or log on to www.michelin.in



MICHELIN