

MICHELIN X® WORKS™ HL Z



ON ROADS, IN AND AROUND
WORKSITES AND QUARRIES

STRONG ROBUSTNESS FOR ON-OFF ROAD APPLICATION



**MAXIMIZE YOUR PAYLOAD:
LOAD CAPACITY TO 10 TONNES
PER AXLE⁽¹⁾**



**OPTIMIZE YOUR COSTS:
MORE ROBUST TIRE, FOR INCREASED
RETRADING ACCEPTANCE⁽²⁾**

**ALL
POSITIONS** 
MAINLY
FOR STEER AXLE

385/65 R 22.5



3PMSF

M+S



MICHELIN

(1) Increased Load Index (LI): +4 LI for MICHELIN 385/65 R 22.5 X® WORKS™ HL Z 164J in comparison with MICHELIN XZY 160K.

(2) Thanks to Powercoil and Duracoil Technologies, in comparison with 385/65 R 22.5 MICHELIN XZY3.



MICHELIN X® WORKS™ HL Z



BUSINESS ADVANTAGES

BOOST AND SIMPLIFY YOUR BUSINESS

- Maximize your journey with a **load capacity** increased⁽¹⁾ to 10 tonnes per axle
- Suitable for all road surfaces, in and around worksites and quarries
- Possible usage on Trailer axle, and on Drive axle on specific vehicle



SAFETY

TRANSPORT SAFELY WHATEVER THE WEATHER CONDITION


- High level of grip: 3PMSF and M+S markings
- Wet grip: Class B
- **Robustness** of the MICHELIN X® WORKS™ HL Z



ENVIRONMENT

TRANSPORT YOUR GOODS IN A GREENER WAY

- Retreading and regrooving save materials and fuel
- Tyres manufactured in compliance with ISO 14001 environmental standards

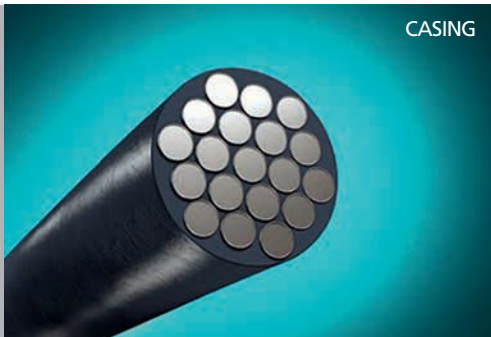

CASING

POWERCOIL

A NEW GENERATION OF ROBUST STEEL CABLES
Allowing tyre mass reduction and providing both better casing endurance and lower rolling resistance.



CASING

DURACOIL

A REINFORCED BEAD FOR BETTER ROBUSTNESS
A new kind of reinforced zone between the tire and the wheel for a better robustness. Our high-end nylon protects the bead bundle. It provides a better bead stability during rolling. The lower part of the tire is more robust: the casing lasts longer and improves the retreadability.

TECHNICAL INFORMATION


EUROPEAN LABELLING

TREAD PATTERN AND DIMENSION	TYPE	LOAD/SPEED INDEX	ORIGINAL TREAD DEPTH	SPECIAL MARKINGS	RADIO FREQUENCY IDENTIFICATION CHIP INTEGRATED	
385/65 R 22.5 MICHELIN X® WORKS™ HLZ	TL	164J (160K)	17.0 mm			C B 73 dB

REGROOVING INFORMATION

TREAD PATTERN AND DIMENSION	THEORETICAL REGROOVING DEPTH	SUGGESTED BLADE
385/65 R 22.5 MICHELIN X® WORKS™ HLZ	3 mm	R4

Retreadable with **MICHELIN** **REMIX**



MICHELIN products are manufactured from high quality materials to high tolerances, ensuring a uniform and consistent performance. Correct application, fitting, inflation and regular inspection of the product are essential to its safe and efficient operation. Remix and the tyre designations mentioned are trademarks of Michelin. For further information about any of the products in this document, contact your local Michelin representative.

WEBSITE
trucks.michelin.eu

MY PORTAL
myportal.michelingroup.com

LINKEDIN
Michelin For Professional Businesses

YOUTUBE
Michelin Trucks & Buses Tyres Europe

