

# MICHELIN® YELDBIB™ TIRE



## THE LOW-PRESSURE TIRE FOR HIGH-POWERED ROW-CROP APPLICATIONS

### LESS PRESSURE, MORE YIELD

- 27% bigger footprint.<sup>1</sup>
- VF – Very High Flexion Tire to carry more load with less air pressure.
- Longer footprint for reduced soil compaction and increased yield.
- Michelin Ultraflex proven yield gain +4%.<sup>2</sup>

### TRACTION

- 45° designed lugs for outstanding traction.<sup>3</sup>
- R1W lugs
- Optimized transfer of power to the ground for reduced fuel consumption.

### GREATER STUBBLE RESISTANCE

- Sweeping 45° tread design helps deflect stubble.
- Additional reinforcement in the center of the tread to defend against stubble.
- Exclusive rubber compound for added durability against chipping from stubble.



(1) Michelin test 2016, VF 480/80 R50 Yeldbib vs 480/80 R50 AGRIBIB.  
(2) Harper Adams University 2014/2016  
(3) Compared to standard competitor's tires with 23° lugs





# MICHELIN® YELDBIB™ TIRE

## FEATURING ULTRAFLEX™ TECHNOLOGY

### Special tread lug design

- Service life of the tire extended by a lug design that deflects stubble away from the center of the tread

### 2 additional tread bars on ground

- R1W tread bars for more grip:
  - longer service life
  - reduced fuel consumption




### Revolutionary casing with MICHELIN Ultraflex Technologies

- up to 24% larger footprint to protect soils from compaction and improve yields\*

\* Source: MICHELIN test and research center (Ladoux) – VF480/80 R50 MICHELIN Yeldbib compared to 480/80 R50 MICHELIN Agribib

### MICHELIN STUBBLE SHIELD

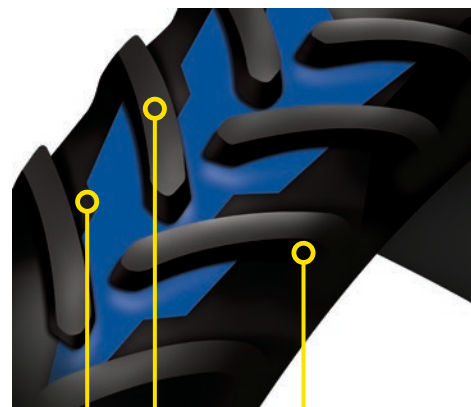

Special rubber compounds for longer service life

Lugs deflect stubble

Anti-stubble strip to strengthen the main zone at risk of damage caused by stubble



Do not use MICHELIN YELDBIB on self propelled sprayers. For self propelled sprayers use MICHELIN® SPRAYBIB™ tire range which was specifically designed to meet usage requirements (speed, load capacity, etc.)



| Size         | Load/Speed Index | MSPN  | RCI |
|--------------|------------------|-------|-----|
| VF 380/85R34 | 149B             | 91239 | 43  |
| VF 420/85R34 | 154A8/154B       | 58965 | 43  |
| VF 380/80R38 | 149A8/B          | 35470 | 43  |
| VF 380/95R38 | 154A8/154B       | 47253 | 44  |
| VF 480/80R46 | 164A8/B          | 10807 | 47  |
| VF 480/80R50 | 166A8/B          | 02098 | 48  |
| VF 480/95R50 | 170A8/B          | 65206 | 49  |



Scan code to learn more!



TO FIND OUT MORE  
US: [business.michelinman.com/agriculture](https://business.michelinman.com/agriculture)  
CA: [business.michelin.ca](https://business.michelin.ca)



FIND US ON FACEBOOK  
[@MichelinTruck](https://www.facebook.com/MichelinTruck)



CONTACT US BY EMAIL  
US: [business.michelinman.com/contact-us](https://business.michelinman.com/contact-us)  
CA: [business.michelin.ca/contact](https://business.michelin.ca/contact)



CONTACT US BY TELEPHONE  
US: 1-888-622-2306  
CA: 1-888-622-2306

Michelin North America Inc., One Parkway South, Greenville, SC 29615  
Michelin North America (Canada) Inc., 2500 Daniel Johnson Blvd., Suite 500, Laval (QC) H7T 2P6  
Copyright © 2022 Michelin North America, Inc. All rights reserved. | © 2022 MNA(C). All rights reserved.  
Specifications subject to change without notice. | An Equal Opportunity Employer | PDF Only (BWA 06/22)

