

MICHELIN® X® AGV^{EV}

RELIABILITY YOU CAN DEPEND ON



MICHELIN



OUR WEBSITE
michelinearthmover.com



TESTIMONIALS
YouTube channel



PRESSURE ADVISOR
pressureadvisor.michelinearthmover.com

AUTHORIZED DISTRIBUTOR:




18.00 R 25 X AGV EV TL 207 A5



AGV

UPDATED MAY 21



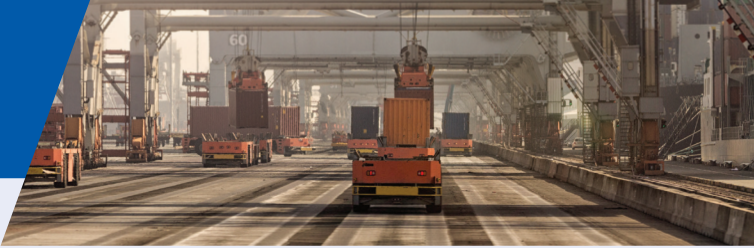


RELIABILITY YOU CAN DEPEND ON



AGV

Michelin
TPMS
Ready



ROBUSTNESS

New casing ply developed to ensure maximal reliability on automated machines



SMOOTH RUNNING

Specifically designed smooth pattern allowing for smooth running while optimizing tire life



REDUCED ROLLING RESISTANCE

Specifically designed IND3 structure to ensure minimal rolling resistance, helping customers limiting emissions



TPMS READY

Built-in patch to ensure easy mounting of Michelin Tire Care TPMS temperature / pressure sensors

MICHELIN TECHNICAL DATA

COMMERCIAL DESCRIPTION	CAI MSPN	Max. dist. / hour km mile	e mm inch	D mm inch	R' mm inch	RC mm inch	Tread depth mm 32rd	Dual Spacing mm inch	Cap liter gallon	Measuring Recommended Rim ⁽²⁾	Other Approved Rims ⁽²⁾
18.00 R 25 X AGV EV TL 207 A5	677019 26910	14 8.7	506 19.9	1656 65.2	741 29	4984 196	40 50	612 24.1	534 18.9	13.00/2.5	15.00/2.5
Bar		6								10	
Psi		87								145	
Machine - Use (kg - lb)	MECHANICAL HANDLING, CYCLIC SERVICE: All axles										
STATIC		18380				22280				26250	
		40528				49127				57881	
<= 10 KM/H		15930				19180				22750	
<= 6 MP/H		35126				42292				50164	
25 KM/H		12250				14750				17500	
15 MPH		27011				32524				38588	
Machine - Use (kg - lb)	COUNTERBALANCED LIFT TRUCK: Load wheel										
<= 10 KM/H		15930				19180				22750	
<= 6 MP/H		35126				42292				50164	
25 KM/H		15930				19180				22750	
15 MPH		35126				42292				50164	

⁽²⁾ More informations in the Michelin Databook 2019.