

COMPACT



LINE

# MICHELIN BIBSTEEL FAMILY



**TOUGHER  
THAN YOUR  
TOUGHEST  
CONDITIONS**

**MICHELIN BIBSTEEL**  
Hard Surface

**MICHELIN BIBSTEEL**  
All Terrain


**Skid steers**





# MICHELIN BIBSTEEL HARD SURFACE

For hard, abrasive ground

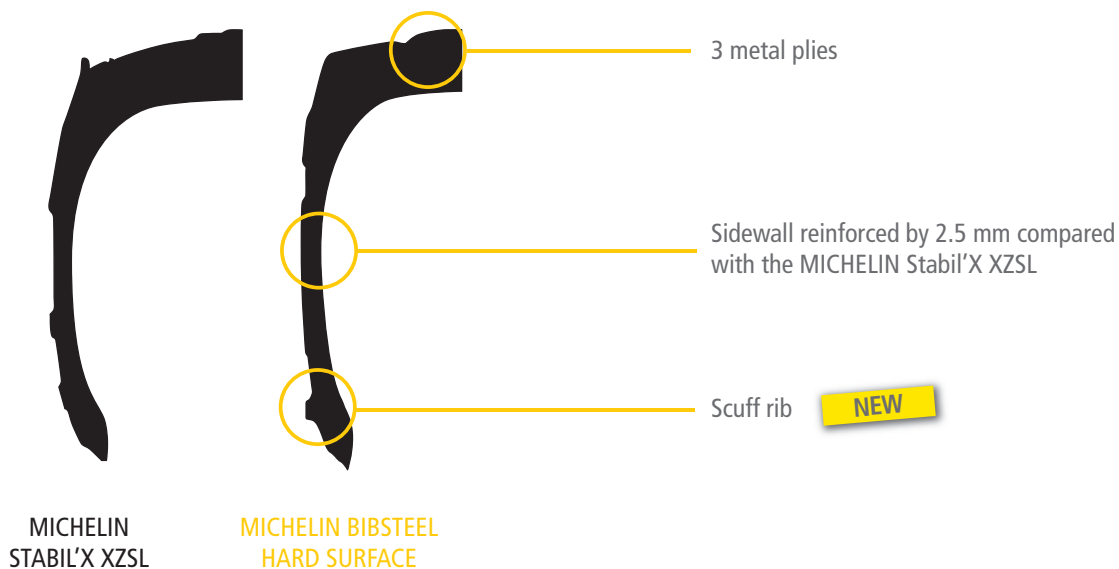

## Successor to the MICHELIN Stabil'X XZSL

- Market leader in terms of wear life and resistance to perforation.

## Resistance to impact and punctures

- 2.5 mm thicker sidewall compared with the MICHELIN Stabil'X XZSL
- Scuff rib **NEW**


## Wear life on abrasive ground

- All-steel radial casing with 3 metal plies.
- Equivalent tread performance to the MICHELIN Stabil'X XZSL.
- Increased sidewall strength.



# MICHELIN BIBSTEEL ALL TERRAIN

The benchmark in traction on soft ground

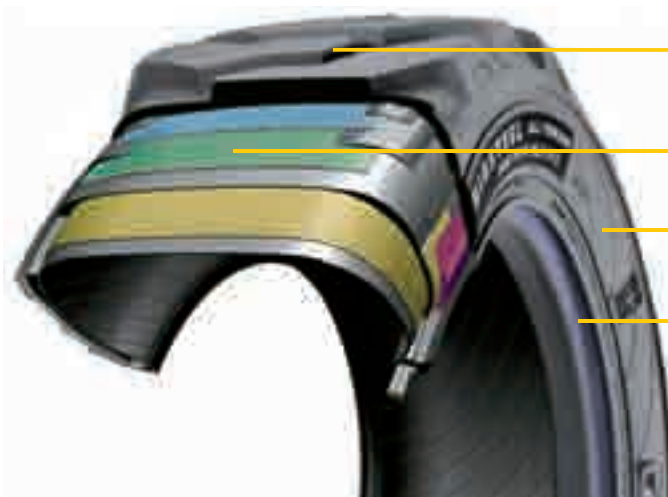


Very open tread for optimum traction and efficient self-cleaning.

3 metal plies.

Reinforced sidewalls for effective resistance to abrasion, perforation and impacts.


Scuff rib.

## The new benchmark in traction on soft ground

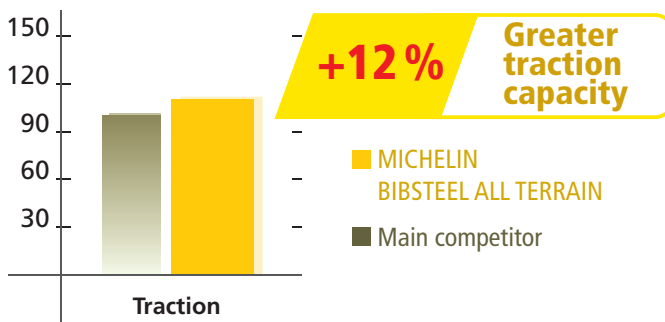

Source : MICHELIN test and research centre (Ladoux)

## Outstanding longevity\*

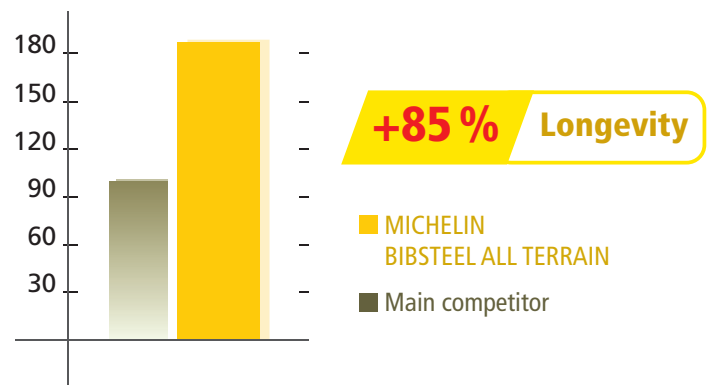

Source : MICHELIN test and research centre (Ladoux)

\* Identical casing design to the radial market reference: MICHELIN Stabli'X XZSL

## Strong enough to stand up to any test\*

- Assured machine availability due to less downtime, and fewer punctures and perforations:
  - an all-steel radial casing for reinforced crown protection
  - robust shoulders and protected sidewalls thanks to three metal plies.



# Characteristics of Compact Line radial tyres

## MICHELIN BIBSTEEL

### MICHELIN BIBSTEEL HARD SURFACE

Ø inches	Tyre sizes	CAI	Tyre characteristics				Rim widths (1) inches	75% internal volume Litres								
			S mm	D mm	R' mm	C.d.R. mm										
16.5	<b>NEW</b> 265/70 R16.5 128A5 TL BIBSTEEL HARD SURFACE (2) (10 R16,5) Equiv 8PR	381539	266	773	361	2335	<b>8,25</b>	45								
	<b>NEW</b> 305/70 R16.5 141A5 TL BIBSTEEL HARD SURFACE (12 R16,5) Equiv 10PR	384408	312	831	384	2495	<b>9,75</b>	64								
<b>Pressure (bar) and (psi) - Load per tyre in kg</b>																
	<b>Bar Psi</b>	<b>1,50 22</b>	<b>1,60 23</b>	<b>1,80 26</b>	<b>2,00 29</b>	<b>2,20 32</b>	<b>2,40 35</b>	<b>2,60 38</b>	<b>2,80 41</b>	<b>3,00 44</b>	<b>3,20 46</b>	<b>3,40 49</b>	<b>3,50 51</b>	<b>3,60 52</b>	<b>3,70 54</b>	<b>3,80 55</b>
265/70 R16.5 128A5 TL	Stat Jus. 25 40	1 635 990 680	1 695 1 025 705	1 810 1 095 755	1 925 1 165 800	2 040 1 235 850	2 155 1 305 900	2 275 1 375 950	2 390 1 450 995	2 505 1 520 1 045	2 620 1 590 1 095	2 740 1 660 1 145	2 795 1 695 1 165	2 855 1 730 1 190	2 910 1 765 1 215	2 970 1 800 1 240
305/70 R16.5 141A5 TL	Stat Jus. 25 40	2 340 1 415 980	2 425 1 465 1 015	2 590 1 565 1 085	2 755 1 665 1 155	2 920 1 770 1 225	3 085 1 870 1 295	3 255 1 970 1 365	3 420 2 070 1 430	3 585 2 170 1 500	3 750 2 270 1 570	3 920 2 375 1 640	4 000 2 425 1 675	4 085 2 475 1 710	4 165 2 525 1 745	4 205 2 575 1 780

### MICHELIN BIBSTEEL ALL TERRAIN

Ø inches	Tyre sizes	CAI	Tyre characteristics				Rim widths (1) inches	75% internal volume Litres								
			S mm	D mm	R' mm	C.d.R. mm										
15	<b>NEW</b> 215/70 R15 117A5 TL BIBSTEEL ALL TERRAIN (32) (27x8,50 R15) Equiv 6PR	699749	237	680	319	2068	<b>7</b>	26								
16.5	<b>NEW</b> 265/70 R16.5 128A5 TL BIBSTEEL ALL TERRAIN (10 R16,5) Equiv 8PR	343353	270	773	350	2300	<b>8,25</b>	46								
	<b>NEW</b> 305/70 R16.5 141A5 TL BIBSTEEL ALL TERRAIN (12 R16,5) Equiv 10PR	972347	311	832	384	2487	<b>9,75</b>	64								
<b>Pressure (bar) and (psi) - Load per tyre in kg</b>																
	<b>Bar Psi</b>	<b>1,50 22</b>	<b>1,60 23</b>	<b>1,80 26</b>	<b>2,00 29</b>	<b>2,20 32</b>	<b>2,40 35</b>	<b>2,60 38</b>	<b>2,80 41</b>	<b>3,00 44</b>	<b>3,20 46</b>	<b>3,40 49</b>	<b>3,50 51</b>	<b>3,60 52</b>	<b>3,70 54</b>	<b>3,80 55</b>
215/70 R15 117A5 TL	Stat Jus. 25 40	1 165 705 490	1 205 730 505	1 290 780 540	1 375 830 575	1 455 880 610	1 540 930 645	1 620 980 680	1 705 1 035 715	1 790 1 085 785	1 870 1 135 820	1 955 1 185 840	1 995 1 210 855	2 035 1 235 885	2 080 1 260 875	2 120 1 285 890
265/70 R16.5 128A5 TL	Stat Jus. 25 40	1 635 990 680	1 695 1 025 705	1 810 1 095 755	1 925 1 165 800	2 040 1 235 850	2 155 1 305 900	2 275 1 375 950	2 390 1 450 995	2 505 1 520 1 045	2 620 1 590 1 095	2 740 1 660 1 145	2 795 1 695 1 165	2 855 1 730 1 190	2 910 1 765 1 215	2 970 1 800 1 240
305/70 R16.5 141A5 TL	Stat Jus. 25 40	2 340 1 415 980	2 425 1 465 1 015	2 590 1 565 1 085	2 755 1 665 1 155	2 920 1 770 1 225	3 085 1 870 1 295	3 255 1 970 1 365	3 420 2 070 1 430	3 585 2 170 1 500	3 750 2 270 1 570	3 920 2 375 1 640	4 000 2 425 1 675	4 085 2 475 1 710	4 165 2 525 1 745	4 250 2 575 1 780

Stat : Static load at 0 km/h, stationary vehicle.  
Jus. 25: Use up to 25 km/h.  
40: use on the road up to a maximum speed of 40 km/h.

IMPORTANT: The inflation pressure is always determined according to the load per tyre, the speed of travel and the work to be done.

(1) The reference rim is shown in bold type.

