

COMPACT



L I N E

MICHELIN BIBSTEEL ALL TERRAIN

NEW



+ 12%*
traction

+ 85%*
longevity

**Radial
construction**

Tougher than your toughest conditions

- Benchmark in traction on soft ground
- Extreme robustness thanks to 3 steel plies
- Outstanding longevity


* Internal Michelin source, comparison with its main competitor on the market.



MICHELIN

A better way forward

Radial construction

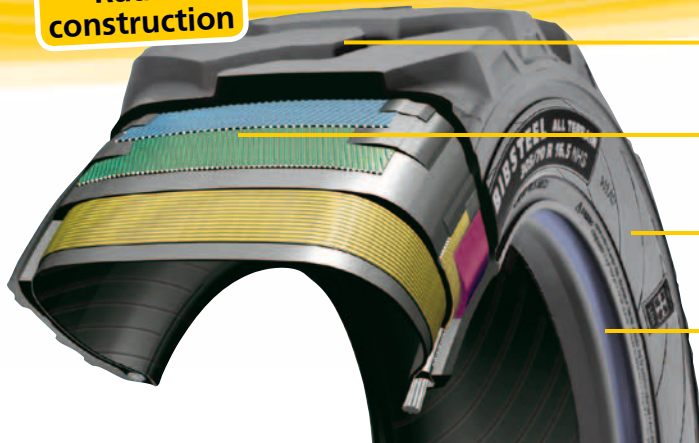

Deep open tread designed for excellent **cleaning** and maximised **traction**.

Outstanding penetration protection thanks to **3 steel plies**.

Reinforced sidewalls for effective abrasion, puncture and impact resistance.

Rim guard to protect the bead and rim from debris.

■ The new benchmark in traction on soft ground:

+12%* traction capacity

■ Extreme robustness** thanks to 3 steel plies

■ Outstanding longevity** : +85%* wear life

* Internal Michelin source, comparison with its main competitor on the market.

** Identical casing design to the radial market reference: MICHELIN Stabil'X XZSL

Technical characteristics

Ø	Tyre sizes	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	Volume Interne 75% litres
			S mm	D mm	R' mm	R.C. mm			
NEW	15 215/70 R15 117A5 TL BIBSTEEL ALL TERRAIN ⁽³⁾ (27x8,50 R15) Equiv 6PR	699749	237	680	319	2068	7		26
NEW	16.5 265/70 R16.5 128A5 TL BIBSTEEL ALL TERRAIN (10 R16,5) Equiv 8PR	343353	270	773	350	2300	8,25		46
NEW	305/70 R16.5 141A5 TL BIBSTEEL ALL TERRAIN (12 R16,5) Equiv 10PR	972347	311	832	384	2487	9,75		64

⁽¹⁾ The reference rim is shown in bold type.

⁽²⁾ KLEBER tube code.

⁽³⁾ Under development. Please contact us for availability.

Ø	Tyre sizes	Pressure (bar) and (psi) – Load per tyre in kg															
		Bar Psi	1,50 22	1,60 23	1,80 26	2,00 29	2,20 32	2,40 35	2,60 38	2,80 41	3,00 44	3,20 46	3,40 49	3,50 51	3,60 52	3,70 54	3,80 55
15	215/70 R15 117A5 TL BIBSTEEL ALL TERRAIN ⁽³⁾ (27x8,50 R15) Equiv 6PR	Stat Jus. 25 40	1 165 705 490	1 205 730 505	1 290 780 540	1 375 830 575	1 455 880 610	1 540 930 645	1 620 980 680	1 705 1 035 715	1 790 1 085 750	1 870 1 135 785	1 955 1 185 820	1 995 1 210 840	2 035 1 235 855	2 080 1 260 875	2 120 1 285 890
16.5	265/70 R16.5 128A5 TL BIBSTEEL ALL TERRAIN (10 R16,5) Equiv 8PR	Stat Jus. 25 40	1 635 990 680	1 695 1 025 705	1 810 1 095 755	1 925 1 165 800	2 040 1 235 850	2 155 1 305 900	2 275 1 375 950	2 390 1 450 995	2 505 1 520 1 045	2 620 1 590 1 095	2 740 1 660 1 145	2 795 1 695 1 165	2 855 1 730 1 190	2 910 1 765 1 215	2 970 1 800 1 240
	305/70 R16.5 141A5 TL BIBSTEEL ALL TERRAIN (12 R16,5) Equiv 10PR	Stat Jus. 25 40	2 340 1 415 980	2 425 1 465 1 015	2 590 1 565 1 085	2 755 1 665 1 155	2 920 1 770 1 225	3 085 1 870 1 295	3 255 1 970 1 365	3 420 2 070 1 430	3 585 2 170 1 500	3 750 2 270 1 570	3 920 2 375 1 640	4 000 2 425 1 675	4 085 2 475 1 710	4 165 2 525 1 745	4 250 2 575 1 780

Stat : Static load at 0 km/h, stationary vehicle.

Jus. 25: Use up to 25 km/h.

40: use on the road up to a maximum speed of 40 km/h.

IMPORTANT: The inflation pressure is always determined according to the load per tyre, the speed of travel and the work to be done.