



ON / OFF ROAD APPLICATIONS

THE MICHELIN® XZY® 3 WIDE BASE TIRE

Exceptional all-position wide base radial designed for heavy front axle mixed service in on/off road applications.

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/> Recommended	<input type="checkbox"/> Acceptable	<input type="checkbox"/> Acceptable	<input checked="" type="checkbox"/> Recommended



(1) Contact your local Michelin representative for details. Michelin reserves the right to modify or discontinue this program at any time for any reason without prior notice.


business.michelinman.com



MICHELIN


THE MICHELIN® XZY® 3 WIDE BASE TIRE


Exceptional all-position wide base radial designed for heavy front axle mixed service in on/off road applications.

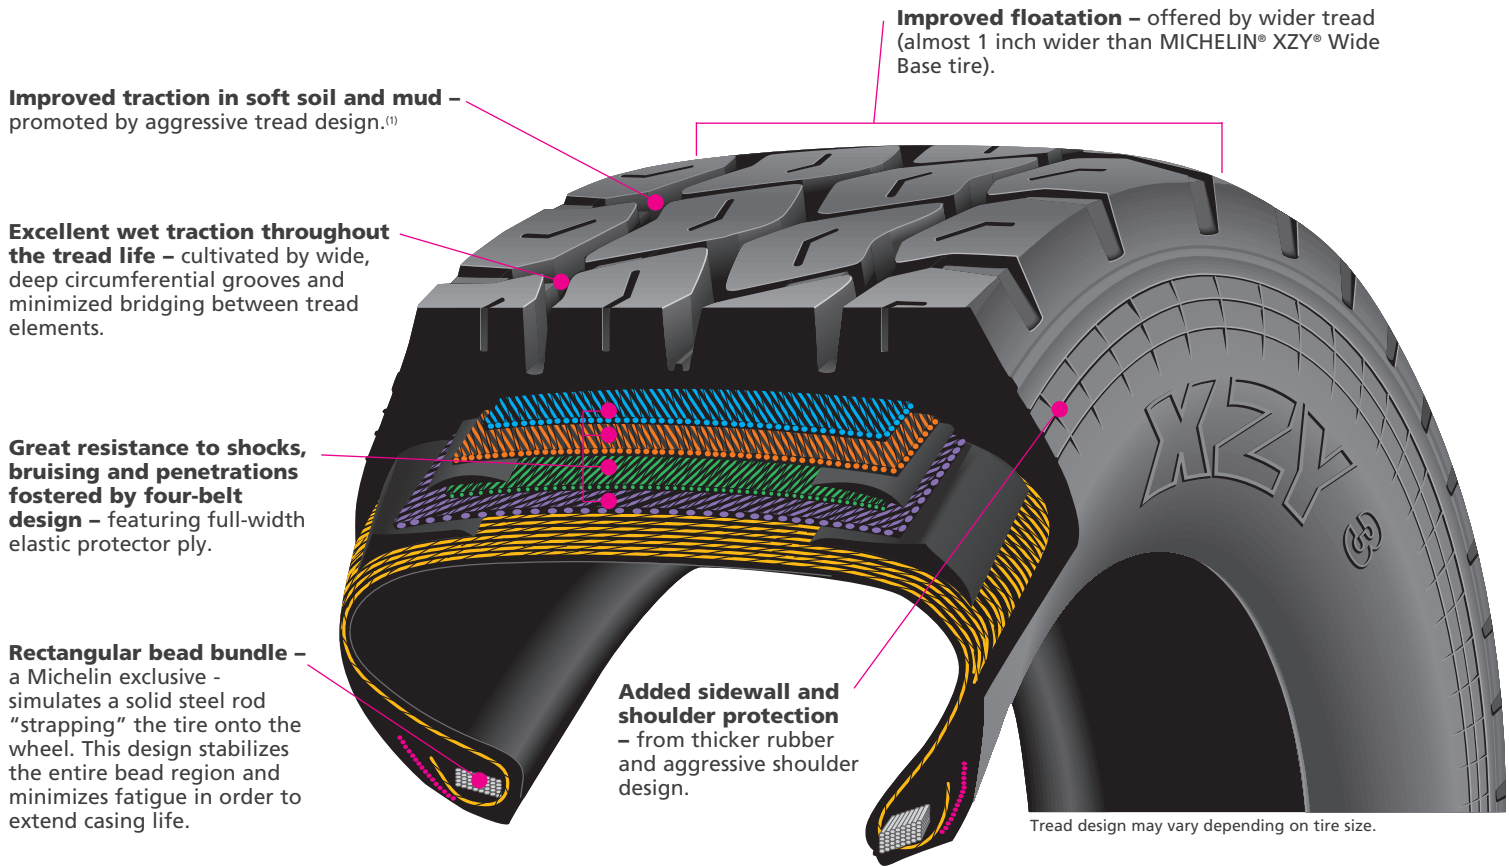


Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Revs Per Mile	Max. Load and Pressure Single			
				mph	kph	in.	mm	in.	mm	in.	mm			lbs.	psi	kg.	kPa
385/65R22.5	J	53779	22	65	105	19.6	499	42.4	1078	14.9	379	11.75, 12.25	491	9370	120	4250	830
425/65R22.5	L	40321	23	65	105	20.6	524	44.7	1137	16.6	421	13.00, 12.25	465	11400	120	5150	830
445/65R22.5	L	83691	23	65	105	21.1	536	45.8	1164	17.8	451	14.00, 13.00	455	12800	130	5800	900

Note: Wheel listed first is the measuring wheel.
 (1) When compared with MICHELIN® XZY® Wide Base tire.
 (*) Exceeding the lawful speed limit is neither recommended nor endorsed.
 (‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.
 MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.michelintruck.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

 TO FIND OUT MORE
 US: business.michelinman.com
 CA: business.michelin.ca

 FIND US ON FACEBOOK
[michelintruck](https://www.facebook.com/michelintruck)

 CONTACT US ON THE WEB
 US: business.michelinman.com/contact-us
 CA: business.michelin.ca/contact-us

 CONTACT US BY TELEPHONE
 US: 1-888-622-2306
 CA: 1-888-622-2306