


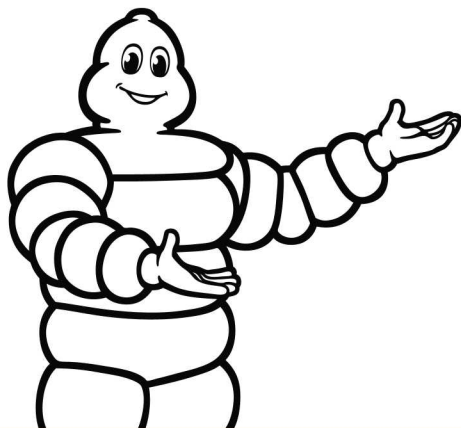

Intended for long and short distance
on all types of road

MICHELIN XTE 2 - XTE 2 +

**ROBUST AND
RESISTANT**

TRAILER AXLE



9.5 R 17.5

215/75 R 17.5

265/70 R 19.5



HIGHER PRODUCTIVITY

LIMITED
DAMAGES




MICHELIN

MICHELIN XTE 2 - XTE 2+

BUSINESS EFFICIENCY	SAFETY	ECOLOGY
"Transport with peace of mind" • Higher productivity throughout vehicles • Versatile usage • Crown block that optimises the contact patch and wear patterns • Scuff-resistant rubber compound	"Protect your load" • Up to 20% ⁽¹⁾ fewer tyres damaged • Resistance to damage • Bead reinforced with rubber • Resistance to impact and load (1) Compared to its predecessor	"A greener way to transport" • Regroove the tyre and extend its lifespan when it consumes the least fuel

MICHELIN XTE 2 AND XTE 2+

Theoretical Regrooving Depth	Regrooving Width	Blade
H = 3 mm	6 to 8 mm	R3

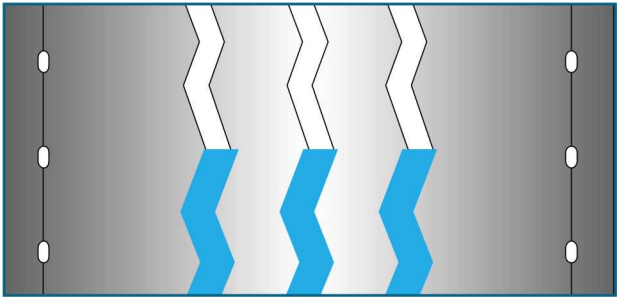

REGROOVING DESIGN

TECHNICAL DATA

Size and tread pattern	Load/speed index	Nominal load per axle (single tyre) (kg)	Recommended pressure	Nominal load per axle (dual tyre) (kg)	Recommended pressure (bar)	Nominal speed	EUROPEAN LABELLING		
									
9.5 R 17.5 XTE 2+	143/141J	5450	8.5	10300	8.5	100	C	B	 67 dB
215/75 R 17.5 XTE 2+	135/133J	4360	8.5	8240	8.5	100	D	B	 67 dB
265/70 R 19.5 XTE 2+	143/141J	5450	8.5	10300	8.5	100	D	B	 69 dB

