

**MICHELIN®**  
**X<sup>®</sup>TRA LOADGRIP™**  
**21.00R33**



***SPEED OR LOAD:***  
***CHOOSE YOUR EFFICIENCY***






# MICHELIN® X<sup>TRA</sup> LOADGRIP™

21.00R33

Get excellent grip in loose surface conditions<sup>1,2</sup> due to 30% more lug edges in contact with the ground with the MICHELIN® X<sup>TRA</sup> LOADGRIP™ 21.00R33 A4/B tyre.

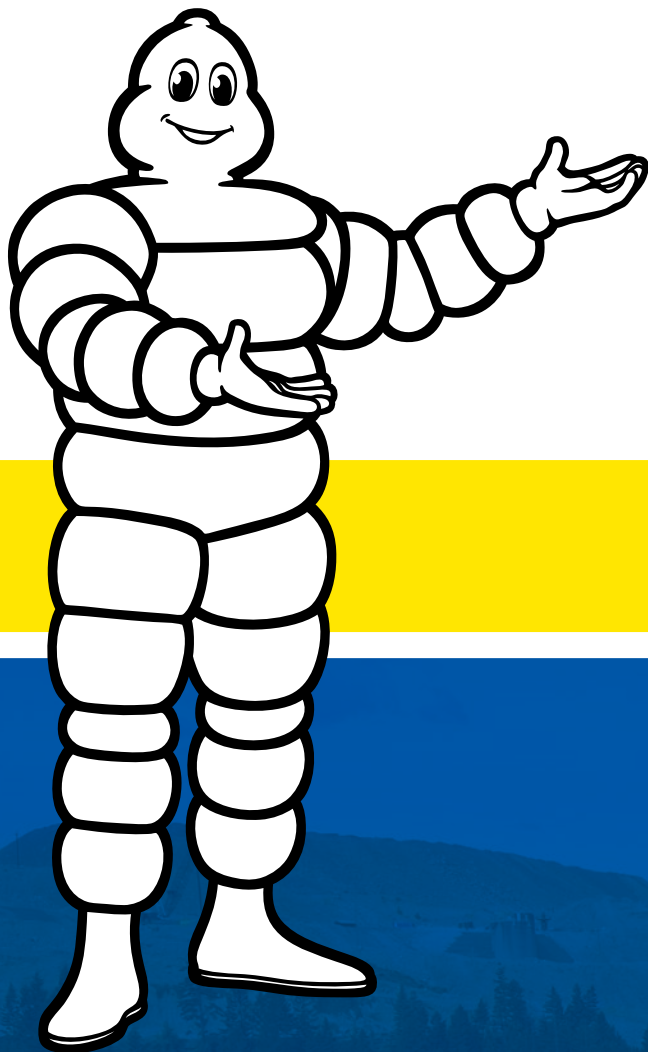


1) Due to 30% more lug edges in contact with the ground.  
2) Based on customer feedback on the MICHELIN® X<sup>TRA</sup> LOADGRIP™ tyre in size 24.00R35 based on field tests of 140 tyres in 10 countries at 23 customer sites during 2016 and 2017.



## +10% MORE LOAD-CARRYING CAPACITY<sup>1</sup>

Increase your tyre load capacity due to a reinforced \*\*\* casing

Get a HIGHER PAYLOAD<sup>1</sup>:



1) Compared to Bridgestone VMTP tyres and MICHELIN® X-TRACTION™ tyres in size 21.00R33. Actual results may vary. (Sources: Bridgestone® 2018 OTR Data Book and MICHELIN® 2017 Data Book).



## MORE DISTANCE IN AN HOUR<sup>1</sup> AND A HIGHER TKPH<sup>2</sup>

Drive up to 34 km in an hour  
due to a cooler running tyre<sup>1</sup>

### A4 COMPOUND

+22% More distance in 1 hour<sup>1</sup>  
+4.6% Higher TKPH<sup>2</sup>

### B COMPOUND

+36% More distance in an hour<sup>1</sup>  
+31.1% More TKPH<sup>2</sup>

1) Compared to the MICHELIN® X-TRACTION™ tyre in size 21.00R33. Actual results may vary.  
2) This data comes from the MICHELIN® Data Book 2017 and Bridgestone® OTR Databook 2016.  
TKPH = Tons Kilometer Per Hour



## +8% LONGER WEAR LIFE<sup>1</sup>

- More volume of rubber to be worn<sup>1</sup>
- Optimised contact patch with the ground
- Cables made of steel encapsulated by rubber prevent corrosion spread, thus increasing aggression resistance

1) Compared to the MICHELIN® X-TRACTION™ tyre size 21.00R33 and based on field test measurements and FARO-method measurements certified by the Michelin® Center of Technology. Actual results may vary.

# TECHNICAL CHARACTERISTICS

COMMERCIAL DESCRIPTION Types CAI (Part Number)	Max. dist./ hour km Miles	TKPH	DIMENSIONAL CHARACTERISTICS Michelin Dimensions							Measuring Rim Approved Rims	Tubeless Seal CAI	Tube Type Ref
			e mm inches	D mm inches	R' mm inches	RC mm inches	Tread Depth mm 32nd	Dual Spacing mm inches	Cap. liter gallon			Flap
MICHELIN® X <sup>TRA</sup> LOAD GRIP™  21.00R33 B *** E4 523174	34 21.1 If Load per tyre ≤ 14Tn	384	565 22.2	2003 78.8	906 36	6054 238	66 83	701 27.6	857 30.3	15.00/3.0	OR 3-33	/
MICHELIN® X <sup>TRA</sup> LOAD GRIP™  21.00R33 A4 *** E4 843315	22 13.7 If Load per tyre ≤ 14Tn											
	31 19.3 If Load per tyre ≤ 14Tn											
	20 12.4 If Load per tyre ≤ 14Tn											

TREAD TYPE	Explanations on how to choose the tyre and determine the inflation pressures. Refer to explanations and methods on how to determine the inflation pressure.												
	Machine - Use	bar	4	4.5	5	5.5	6	6.5	7	7.25	7.5	8	
		psi	58	65	73	80	87	94	102	105	109	116	
MICHELIN® X <sup>TRA</sup> LOAD GRIP™ 21.00R33 B *** E4  MICHELIN® X <sup>TRA</sup> LOAD GRIP™ 21.00R33 A4 *** E4	Transport Load per tyre ≤ 14Tn	Standard	9315 20536	10250 22597	11185 24658	12125 26731	13065 28803	14000 30865	-	-	-	-	
MICHELIN® X <sup>TRA</sup> LOAD GRIP™ 21.00R33 B *** E4  MICHELIN® X <sup>TRA</sup> LOAD GRIP™ 21.00R33 A4 *** E4	Transport Load per tyre > 14Tn	Standard	-	-	-	-	-	-	15000 33069	15500 34172	15867 34981	16600 36597	

\* Reference MICHELIN® Data Book 2019 for more information.



Copyright ©2020 Michelin North America, Inc. All Rights Reserved.  
The Michelin Man is a registered trademark owned by Michelin North America, Inc.

