

THE MICHELIN® XTE® TIRE


The robust trailer tire designed to withstand the demands of high scrub and spread axle service in regional applications





THE MICHELIN® XTE® TIRE

The robust trailer tire designed to withstand the demands of high scrub and spread axle service in regional applications.

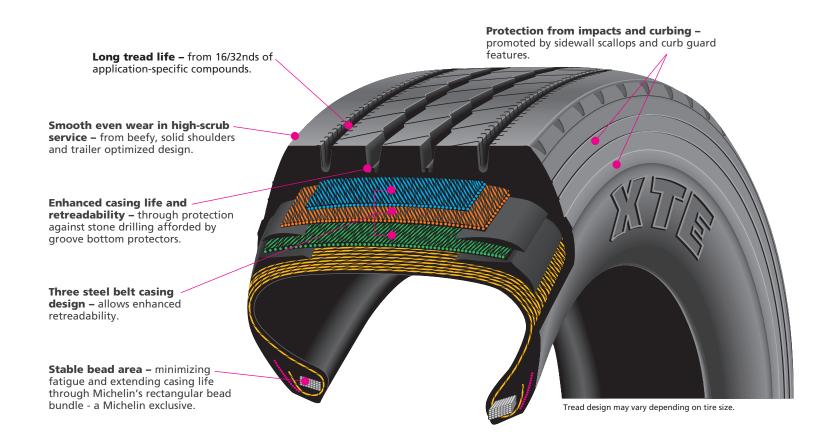

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)			Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel	Min. Dual Spacing (‡)		Revs Per	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	in.	mm	in.	mm	in.	mm	listed first.)	in	mm	Mile	lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R24.5	G	07025	16	75	20.0	509	43.0	1093	11.3	286	8.25, 7.50	12.5	318	482	6610	105	3000	720	6005	105	2725	720


Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information.

Please visit www.business.michelinman.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.



US: business.michelinman.com CA: business.michelin.ca/en





