


THE MICHELIN X® LINE GRIP D TIRE

A drive tire that provides exceptional mileage, lasting traction and features a casing so durable it's designed to reach up to 1 million miles with up to 4 retreads.

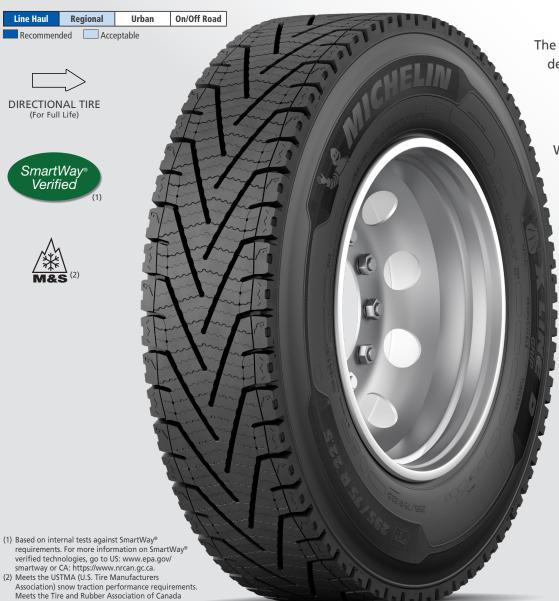

The Michelin X[®] Line Grip D tire delivers 20% more miles than the Michelin XDN2 tire.⁽³⁾

.

.....

......

When comparing worn tires, it delivers 90% better snow starting traction⁽⁴⁾ and 25% better wet starting traction⁽⁵⁾ than the Michelin XDN2 tire.

(3) Based on an internal study of 3 fleets in line haul usage, measured at tire removal, 129 total tires, based on a 6/32" max. pull point, 295/75R2.2.5 Michelin Xº Line Grip D tire vs. 275/80R22.5 Michelin XDN2 tire (equivalent sizes). Actual on-road results may vary.

(4) Calculated based on internal snow starting test at 10/32" remaining tread, Michelin X° Line Grip D 295/75R22.5 tire vs. Michelin XDN2 275/80R22.5 (equivalent sizes) tire.


(5) Calculated based on internal wet starting test; measuring peak Mu; both tires worn to 10/32" remaining tread; XLGD 295/75R22.5 LRG vs XDN2 275/80R22.5 (equivalent sizes). Actual on-road results may vary.



(TRAC) requirements for severe snow traction.

THE MICHELIN X® LINE GRIP D TIRE

Long Wear and Casing Life

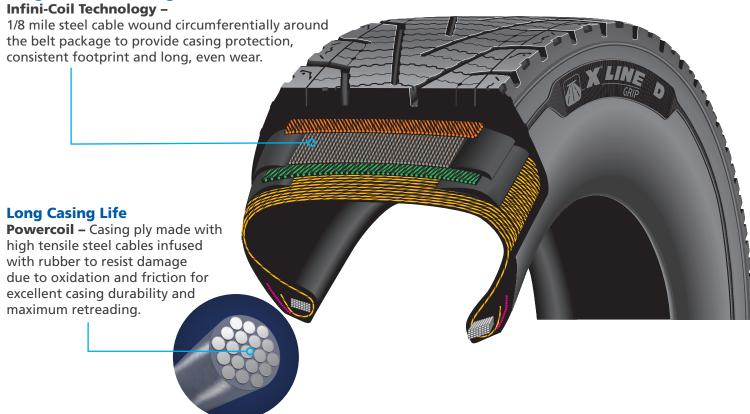

Traction and Mileage Advanced Tread Design

Compact tread design utilizing angled grooves designed to improve wear life as well as provide lasting traction in snowy and wet conditions.







Regional Urban On/Off Road

Recommended Acceptable

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel	Min. Dual Spacing (‡)		Revs Per	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	kph	in.	mm	in.	mm	in.	mm	listed first.)	in	mm	Mile	lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
295/75R22.5	G	19901	24	75	120	19.0	483	40.5	1029	11.1	283	8.25, 9	12.2	311	510	6175	110	2800	760	5675	110	2575	760
11R22.5	G	26206	24	75	120	19.7	501	41.7	1059	11.4	290	8.25, 7.5	12.5	318	494	6175	105	2800	720	5840	105	2650	720

Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.
(‡) Overall width will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.
Michelin tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit business.michelinman.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions.

Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE US: business.michelinman.com CA: business.michelin.ca





US: business.michelinman.com/contact-us CA: business michelin ca/contact-us

