




KLEBER Topker IF

TOPKER switches to IF to help boost traction, improve comfort and raise productivity.

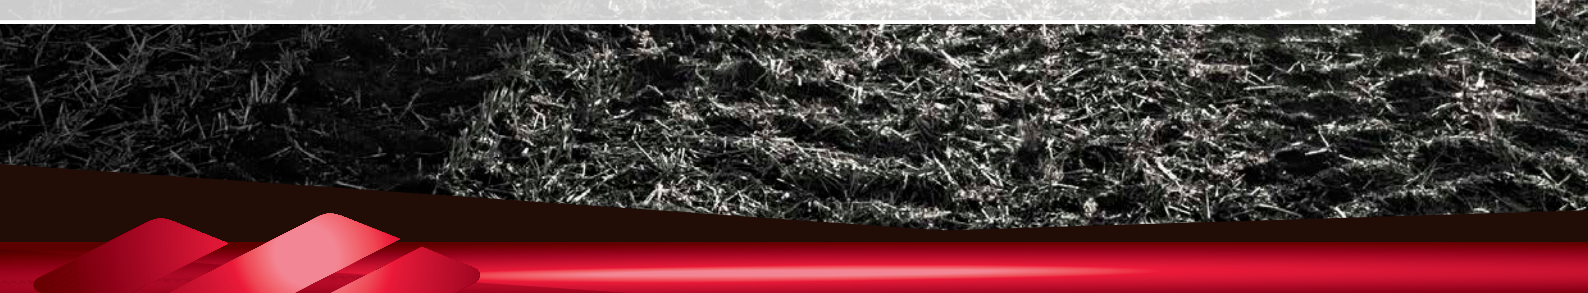

High power tractors
220 hp and over



Peace of mind, everytime



KLEBER Topker IF

Dimensions available by end of April 2021

Tyre specifications and pressure table. Load per tyre in kg.

Ø INCHES	DESCRIPTION	CAI	e (mm)	D (mm)	R' (mm)	RC (mm)	Recommended rim	Acceptable rims	Tube (code)	75% internal volume (litres)	Tread depth (mm)				
28	IF 600/65R28 160D/156E TL	686028	626	1486	661	4417	DW21B(A)	DW20B (A)	717	405	50				
Bar Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h			2850	3225	3600	3975	4350	4465	4580	4695	4805	4920	5035	5125	5215
30 km/h			2580	2920	3260	3595	3935	4040	4140	4245	4345	4450	4550	4635	4715
65 km/h			2480	2805	3135	3460	3785	3885	3980	4080	4180	4275	4375	4460	4500
65 km/h Dual	1570	1865	2155	2450	2745	3035	3330	3415	3505	3590	3675	3765	3850	3925	3990
70 km/h			2255	2555	2850	3150	3445	3515	3585	3655	3725	3790	3860	3930	4000
28	IF 600/70R28 164D/160D TL	774936	610	1569	697	4652	DW21B(A)	DW20B (A)	717	448	52				
Bar Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h			3140	3590	4040	4485	4935	5050	5160	5275	5385	5500	5610	5695	5750
30 km/h			2840	3245	3655	4060	4465	4565	4665	4770	4870	4970	5070	5150	5200
65 km/h			2730	3120	3510	3900	4290	4390	4485	4585	4680	4780	4875	4950	5000
65 km/h Dual	1805	2135	2460	2790	3120	3445	3775	3860	3945	4035	4120	4205	4290	4355	4400
70 km/h			2485	2840	3195	3550	3905	3980	4055	4130	4205	4275	4350	4425	4500
30	IF 600/70R30 165D/161E TL	278892	634	1591	695	4709	DW21B (A)	DW20B (A)	737	468	52				
Bar Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h			3220	3675	4125	4580	5030	5140	5255	5365	5480	5590	5700	5815	5925
30 km/h			2910	3320	3730	4140	4550	4650	4750	4850	4955	5055	5155	5255	5355
65 km/h			2800	3195	3590	3980	4375	4470	4570	4665	4765	4860	4955	5055	5150
65 km/h Dual	1760	2115	2465	2810	3160	3505	3850	3935	4020	4105	4190	4275	4360	4445	4530
70 km/h			2550	2910	3265	3625	3980	4060	4140	4220	4305	4385	4465	4545	4625
38	IF 650/75R38 175D/171E TL	920724	688	1932	859	5726	DW23B (A)	DW24B (A) DW21B (A)	804	728	58				
Bar Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h			4325	4945	5565	6180	6800	6980	7155	7315	7460	7600	7725	7845	7935
30 km/h			3915	4470	5030	5590	6150	6315	6470	6615	6750	6875	6990	7095	7175
65 km/h			3765	4300	4840	5375	5915	6070	6220	6360	6490	6610	6720	6820	6900
65 km/h Dual	2355	2840	3310	3785	4255	4730	5205	5345	5475	5595	5710	5815	5915	6000	6070
70 km/h			3425	3915	4400	4890	5380	5525	5660	5785	5905	6015	6115	6150	6150
38	IF 710/70R38 178D/174E TL	525939	735	1955	864	5785	DW24B (A)	DW23B (A) DW25B (A)	804	825	54				
Bar Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h			4665	5330	6000	6665	7330	7490	7650	7810	7975	8135	8295	8455	8625
30 km/h			4220	4825	5425	6030	6630	6775	6925	7070	7215	7360	7510	7655	7800
65 km/h			4055	4635	5215	5795	6375	6515	6655	6795	6930	7070	7210	7350	7500
65 km/h Dual	2560	3060	3570	4080	4590	5100	5610	5735	5855	5980	6100	6225	6345	6470	6600
70 km/h			3690	4220	4745	5275	5800	5925	6055	6180	6310	6435	6565	6690	6700

* Notes

The inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (January 2021). Technical data is subject to change without prior notice.

• For plowing and other field applications subject to high torque, use the 30 km/h line.

• When using single tire configuration:

- add 0.4 bar for use on slopes of more than 20%

- add 0.4 bar for intensive road use exceeding 50%

• 10 km/h: low torque application only

The technical data above is provided subject to subsequent amendments to the release date of these tables (in January 2021).

For high power tractors 220 hp and over



Tyre specifications and pressure table. Load per tyre in kg.

Ø INCHES	DESCRIPTION	CAI	e (mm)	D (mm)	R' (mm)	RC (mm)	Recommended rim	Acceptable rims	Tube (code)	75% internal volume (litres)	Tread depth (mm)					
38	IF 650/85R38 179D/175E TL	690520	696	2033	902	6022	DW23B (A)	DW20B (A) MW23B (A)	804	857	61					
Bar	Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h				4890	5580	6125	6670	7220	7490	7765	8035	8310	8460	8615	8765	8915
30 km/h				4420	5045	5540	6035	6525	6775	7020	7270	7515	7650	7790	7925	8060
65 km/h				4250	4850	5325	5800	6275	6515	6750	6990	7225	7355	7490	7620	7750
65 km/h Dual	2640	3190		3740	4268	4685	5105	5520	5730	5940	6150	6358	6475	6590	6705	6820
70 km/h				4000	4500	5050	5600	6150	6240	6325	6415	6500	6600	6700	6800	6900
38	IF 800/70R38 179D/175E TL	873336	785.2	2053	892	6043	DW25B (A)	MW25B (A) DW27B (A)	804	1073	58.5					
Bar	Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h				5605	6440	7245	8080	8915								
30 km/h				5070	5810	6550	7305	8060								
65 km/h				4875	5588	6300	7025	7750								
65 km/h Dual	3035	3663		4290	4918	5545	6185	6820								
70 km/h				4340	4985	5605	6255	6900								
42	IF 710/70R42 179D/175E TL	622517	716	2082	926	6163	DW25B (A)	DW23B (A) MW25B (A)	802	872	59					
Bar	Psi	0.4 (6)	0.6 (9)	0.8 (12)	1.0 (15)	1.2 (17)	1.4 (20)	1.6 (23)	1.7 (25)	1.8 (26)	1.9 (28)	2.0 (29)	2.1 (30)	2.2 (32)	2.3 (33)	2.4 (35)
10 km/h				4890	5560	6110	6660	7215	7490	7765	8040	8315	8465	8615	8765	8915
30 km/h				4420	5045	5540	6035	6525	6775	7020	7270	7515	7650	7790	7925	8060
65 km/h				4250	4850	5325	5800	6275	6515	6750	6990	7225	7355	7490	7620	7750
65 km/h Dual	2640	3190		3740	4268	4685	5105	5520	5730	5940	6150	6358	6475	6590	6705	6820
70 km/h				3870	4415	4860	5305	5755	5975	6200	6420	6645	6710	6775	6835	6900

ON THE GROUND, KLEBER TOPKER IF* ENABLES YOU TO:

REDUCE YOUR PRESSURE

(BY UP TO 0,7 BAR)



INCREASE YOUR FOOTPRINT BY UP TO +15%

REDUCING SOIL COMPACTION

* vs KLEBER TOPKER

Comparison between IF650/75R38 Topker IF (1.7 bar) and 650/75R38 Topker (2.4 bar) tyres with an axle load of 12,410 kg in field conditions (30 km/h line).

The footprint comparison comes from internal testing and measurement of IF and standard deflection tyres of the same size and pattern. The IF tyre has at least 15% more tyre in contact with the soil for the same tyre load.

Peace of mind, everytime

Kleber

KLEBER Topker IF



TRACTION

- Tyre lug spacing designed for maximum traction
- Tread pattern designed to maximize the contact patch
- **IF** standard brings up to 15% more traction than standard tyres



LOAD CAPACITY

- **IF** tyres carry up to 20% more load at the same pressure than standard tyres of the same size⁽¹⁾



SELF-CLEANING

- An inter-lug design to assist self-cleaning
- Diamond shapes identify the KLEBER brand



COMFORT

- Overlapping lugs to provide a smooth ride on road



IF stands for Increased Flexion as denoted by ETRTO (The European Tyre and Rim Technical organisation).

(1) Topker IF and Topker standard flex have different reference pressures and not all standard flex tyres have the same reference pressures so the IF load bonus varies to the 20% norm. Check each tyre dimension.



TRACTION



LOAD CAPACITY



COMFORT