

# TECHNICAL CHARACTERISTICS

CLASSIC COMPETITION


RANGES	Michelin designation for competition tyres	Equivalent metric dimension + load and speed indicator	Ext. dia. (mm)	Rolling circumference (mm)	Recommended ETRTO rim widths (inches)	Section / Rim (mm / inches)
<b>TBS+</b> <small>NEW</small>	16/53-13 TB5+ F	185/55 R 13 72 V	533	1677	5 à 6,5	
	16/53-13 TB5+ R	185/55 R 13 72 V	533	1677	5 à 6,5	
	20/53-13 TB5+ F	245/40 R 13 77 V	528	1659	8 à 9,5	
	20/53-13 TB5+ R	245/40 R 13 77 V	528	1659	8 à 9,5	
	18/60-15 TB5+ F	225/50 R 15 79 V	608	1912	6 à 8	
	18/60-15 TB5+ R	225/50 R 15 79 W	608	1912	6 à 8	
	23/59-15 TB5+ R	265/40 R 15 92 W	-	-	8,5 à 10	
	23/62-15 TB5+ F	270/45 R 15 86 W	-	-	8,5 à 10,5	
	23/62-15 TB5+ R	270/45 R 15 86 W	-	-	8,5 à 10,5	
	26/61-15 TB5+ F	285/40 R 15 87 W	611	1920	9,5 à 11	
	26/61-15 TB5+ R	285/40 R 15 87 W	611	1920	9,5 à 11	
29/61-15 TB5+ R	335/35 R 15 93 W	-	-	11 à 13		
<b>TBS</b>	16/53 - 13 TB 5 F	185/55 R 13 72 V	531	1625	5 à 6,5	195 / 6
	20/53 - 13 TB 5 F	245/40 R 13 77 V	531	1625	8 à 9,5	252 / 9
	18/60 - 15 TB 5 F	225/50 R 15 79 V	605	1857	6 à 8	230 / 7
	18/60 - 15 TB 5 R	225/50 R 15 79 W	605	1857	6 à 8	230 / 7
	23/62 - 15 TB 5 F	270/45 R 15 86 W	620	1903	8,5 à 10,5	278 / 9
	23/62 - 15 TB 5 R	270/45 R 15 86 W	620	1903	8,5 à 10,5	278 / 9
	23/59 - 15 TB 5 R	265/40 R 15 92 W	592	1817	8,5 à 10,5	269 / 9
	26/61 - 15 TB 5 F	285/40 R 15 87 W	610	1871	9,5 à 11	291 / 10
	26/61 - 15 TB 5 R	285/40 R 15 87 W	610	1871	9,5 à 11	291 / 10
	29/61 - 15 TB 5 R	335/35 R 15 93 W	616	1890	11 à 13	341 / 11,5
	<b>TB 15 (MIXTE) PB 20 (MAXI-PLUIE)</b>	16/53 - 13 TB15	175/60 R 13 72 V	536	1640	5 à 6
20/53 - 13 TB15		225/45 R 13 77 V	533	1635	7 à 8,5	231 / 8
15/60 - 15 TB 15		170/65 R 15 77 V	601	1847	5 à 6	185 / 6
18/60 - 15 TB 15		215/55 R 15 79 V	612	1885	6 à 7,5	224 / 7
23/62 - 15 TB 15		270/45 R 15 86 V	625	1923	8,5 à 10,5	268 / 9
26/61 - 15 TB 15		295/40 R 15 87 V	615	1891	10 à 11,5	288 / 10
29/61 - 15 TB 15		335/35 R 15 93 V	621	1903	11 à 13	330 / 11,5
18/60 - 15 PB 20		205/55 R 15 79 H	609	1869	5,5 à 7,5	220 / 6,5
23/62 - 15 PB 20		275/45 R 15 86 H	628	1928	8,5 à 10,5	266 / 9

⚠ The technical data contained in this document is given for information purposes only. Checks must be made under real conditions.

## TECHNICAL CHARACTERISTICS

RANGES	Michelin designation for competition tyres	Average cross-section widths measured in mm, at 1.3 bar and at 25°C													
		Rim: 5"	Rim: 5,5"	Rim: 6"	Rim: 6,5"	Rim: 7"	Rim: 7,5"	Rim: 8"	Rim: 8,5"	Rim: 9"	Rim: 9,5"	Rim: 10"	Rim: 10,5"	Rim: 11"	
<b>TBS+</b> <small>NEW</small>	16/53-13 TBS+ F	178,08	183,08	188,28	193,28										
	16/53-13 TBS+ R	178,08	183,08	188,28	193,28										
	20/53-13 TBS+ F							237,88	243,08	248,08	253,28				
	20/53-13 TBS+ R							237,88	243,08	248,08	253,28				
	18/60-15 TBS+ F			212,78	217,78	222,98	227,98	232,98							
	18/60-15 TBS+ R			212,78	217,78	222,98	227,98	232,98							
	23/59-15 TBS+ R														
	23/62-15 TBS+ F														
	23/62-15 TBS+ R														
	26/61-15 TBS+ F											283,63	288,63	293,63	298,83
	26/61-15 TBS+ R											283,63	288,63	293,63	298,83
	29/61-15 TBS+ R														

CLASSIC COMPETITION

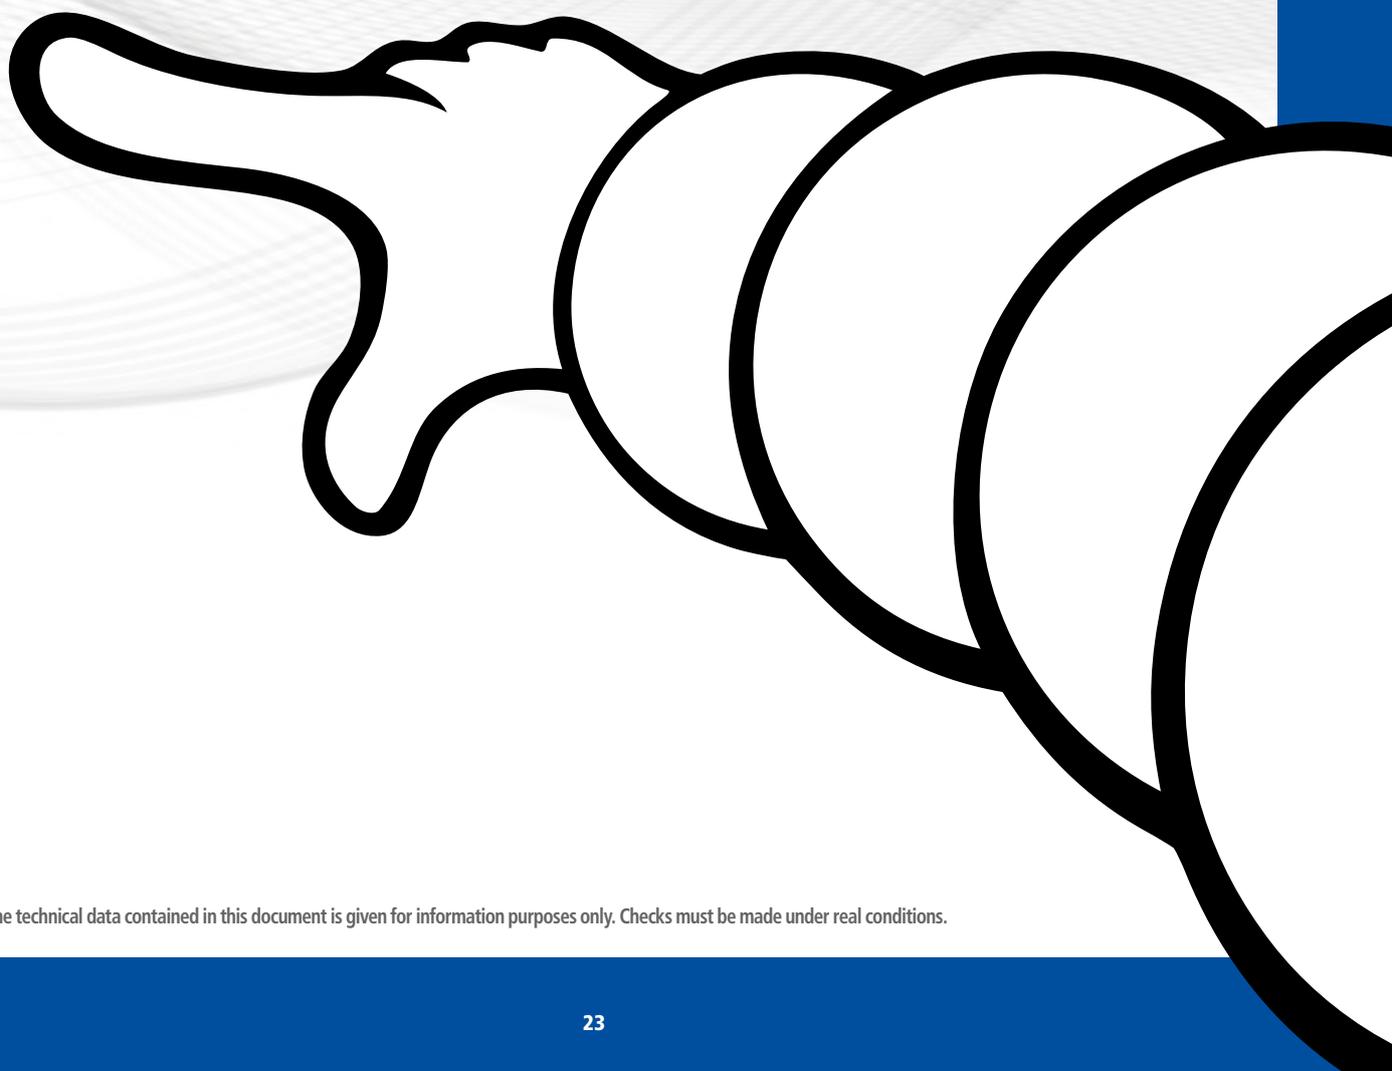

⚠ The technical data contained in this document is given for information purposes only. Checks must be made under real conditions.