



TYRES TECHNICAL DATA BOOK


2019/2020

Leading the field!



SUMMARY

READING THE TECHNICAL DATA	4
EQUIVALENCE CHART	5
TRACTORS - HIGH POWER	7
TAURUS POINT HP	7
TRACTORS - LOW & MEDIUM POWER	10
TAURUS POINT 65	10
TAURUS POINT 70	14
TAURUS POINT 75	20
TAURUS POINT 8	22
ROW CROP	31
TAURUS RC 95 SOILSAVER	31

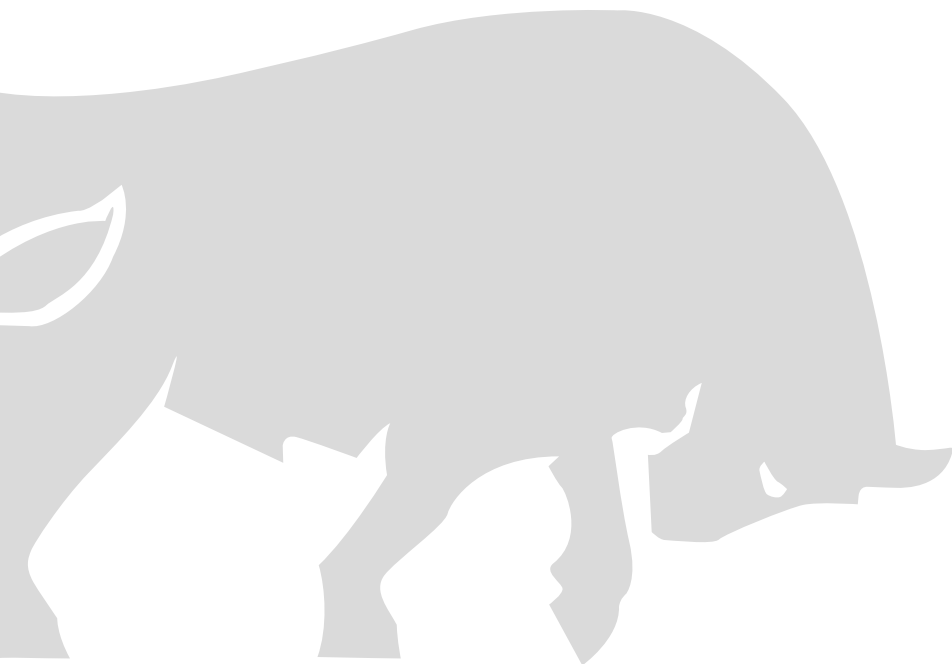

READING THE TECHNICAL DATA

Ø inches — Rim diameter in inches

Local country & International Product Code (SW) Section Width in millimeters

(OD) Overall diameter in millimeters

(LR) Loaded Radius in millimeters

(RC) Rolling Circumference in millimeters

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)
30	14.9 R30 129A8/126B TL	527022	384	1408	633	4185	W13	W12	734	211	46

(TL) Tubeless

Pressure scale in bar and psi

Bar	0.4	0.6	0.8	0.9	1	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2
Psi	6	9	12	13	15	16	17	19	20	22	23	25	26	28	29
65 km/h		2180	2500	2690	2875	3065	3250	3405	3565	3720	3875	3970	4065	4155	4250
70 km/h		2000	2295	2470	2640	2815	2985	3130	3270	3415	3555	3640	3730	3815	3900
65 km/h Dual		1920	2180	2310	2440	2570	2700	2830	2960	3090	3220	3350	3480	3610	3740

Maximum speed in km/h

Load per tyre in kg



Important notes for TYRE use appear at the end of technical data pages for each range.

EQUIVALENCE CHART

STAGE 1

Identify the relevant SRI using the original size.

SRI: «Speed Radius Index» is a parameter used to calculate the theoretical speed of vehicles for homologation procedures in the European Union and for the interchangeability of different TYRE sizes.

ø	DIMENSIONS	SRI	ø	DIMENSIONS	SRI	ø	DIMENSIONS	SRI	ø	DIMENSIONS	SRI
16	6.50R16	360	26	480/70R26	650	32	210/95R32 (8.3R32)	575	38	580/70R38	875
	7.50R16	390		23.1-26	750		230/95R32 (9.5R32)	600		620/70R38	875
	250/80R16	390		520/80R26	700		270/95R32 (11.2R32)	625		650/65R38	875
	260/70R16	360		540/65R26	650		320/85R32 (12.4R32)	650		650/75R38	925
	280/65R16	360		580/70R26	675		650/75R32 (24.5R32)	825		650/85R38	975
	280/70R16	390		620/70R26	725		680/75R32 (30.5LR32)	875		680/75R38	925
	320/65R16	390		620/75R26	750		680/85R32	925		710/60R38	875
18	7.50R18	410		750/50R26	675		800/65R32	875		710/70R38	925
	280/70R18	410		750/65R26	750		800/70R32	925		710/85R38	1025
	320/65R18	410		9.5R28	550		900/60R32	925		750/65R38	925
	340/65R18	425		250/85R28	550		1000/55R32	875		800/70R38	975
	7.50R20	425		280/85R28 (11.2R28)	575		1050/50R32	875		900/60R38	975
	9.5R20	450		320/70R28	575		320/85R34	675	40	230/95R40 (9.5R40)	700
11.2R20	475		320/85R28 (12.4R28)	600		380/85R34	725		270/95R42 (11.2R42)	750	
12.4R20	500		340/65R28	550		420/85R34 (16.9R34)	750		300/95R42 (12.4R42)	800	
13.6R20	525		380/85R28 (13.6R28)	625		460/85R34 (18.4R34)	775		320/90R42	800	
14.9LR20	525		360/70R28	600		480/70R34	750		480/80R42 (18.4R42)	875	
260/80R20	450		380/70R28	625		520/70R34	775		520/85R42 (20.8R42)	925	
280/70R20	425		380/85R28 (14.9R28)	650		520/75R34	775		580/85R42	975	
280/85R20	475		420/65R28	600	34	540/65R34	750	42	620/70R42	925	
300/70R20	450	28	420/70R28	650		600/60R34	750			650/65R42	925
320/70R20	475		420/75R28	650		600/65R34	875			650/85R42	1025
320/85R20	500		420/85R28 (16.9R28)	675		620/75R34	725			710/60R42	925
340/65R20	450		440/65R28	625		650/60R34	775			710/70R42	975
340/75R20	500		480/60R28	625		650/65R34	825			710/75R42	1025
360/70R20	500		480/65R28	650	650/75R34	875		900/50R42	925		
380/70R20	525		480/70R28	675	710/60R34	825		900/60R42	1025		
380/75R20	525		520/60R28	650	710/75R34	925		210/95R44 (8.3R44)	725		
420/65R20	500		540/65R28	675	210/95R36 (8.3R36)	625	44	230/95R44 (9.5R44)	750		
440/65R20	525		600/60R28	675	230/95R36 (9.5R36)	650			270/95R44 (11.2R44)	775	
8.3R24	475		600/65R28	700	270/95R36 (11.2R36)	675			270/95R46 (11.2R46)	800	
250/85R24 (9.5R24)	500		600/70R28	725	320/85R36 (12.4R36)	700			300/95R46 (12.4R46)	825	
280/85R24 (11.2R24)	525		380/85R30 (14.9R30)	675	340/85R36 (13.6R36)	725			320/90R46	825	
300/70R24	500		420/70R30	675	270/95R38 (11.2R38)	700			340/85R46 (13.6R46)	825	
320/70R24	525		420/85R30 (16.9R30)	700	320/85R38 (12.4R38)	725		380/90R46	875		
320/85R24 (12.4R24)	550		420/90R30	725	340/85R38 (13.6R38)	750	46	420/80R46	875		
340/85R24 (13.6R24)	575		460/85R30 (18.4R30)	725	380/80R38	750			480/80R46	925	
360/70R24	550		480/70R30	700	380/95R38	800			520/85R46 (20.8R46)	975	
380/70R24	575		480/75R30	700	400/75R38 (15.5R38)	750			620/70R46	975	
380/85R24 (14.9R24)	600		520/70R30	725	420/85R38 (16.9R38)	800			750/75R46	≥ 1075	
400/70R24	575		520/85R30	775	460/85R38 (18.4R38)	825			900/65R46	≥ 1075	
420/65R24	550	30	540/65R30	700	480/70R38	800		230/95R48 (9.5R48)	800		
420/70R24	600		600/60R30	700	520/70R38	825	48	270/95R48 (11.2R48)	825		
420/85R24 (16.9R24)	625		600/65R30	725	520/85R38 (20.8R38)	875			340/85R48 (13.6R48)	875	
440/65R24	575		600/70R30	750	540/65R38	800			320/90R50	875	
460/70R24	600		620/70R30	775	600/60R38	800			380/90R50	925	
480/65R24	600		620/75R30	800	600/65R38	825		50	420/95R50	975	
480/70R24	625	650/70R30	800	650/60R38	825				480/80R50	975	
500/70R24	625	650/75R30	800				480/95R50		1025		
540/65R24	625	710/55R30	725				300/95R52 (12.4R52)		925		
		710/60R30	750				270/95R54 (11.2R54)		925		
25	1000/50R25	750					320/90R54		925		380/90R54

EQUIVALENCE CHART

STAGE 2

Based on the SRI obtained, establish the possible tyre size equivalents.

IMPORTANT :

- In no case does the SRI correspond to a specific tread circumference value. Its use in these tables is purely indicative. Verification measurements must be taken.
- Any changes mean you must calculate the axle ratios, evaluate weight distributions and check that the rim widths and diameters are compatible (see technical pages)

SRI	EQUIVALENCES	SRI	EQUIVALENCES	SRI	EQUIVALENCES	SRI	EQUIVALENCES			
360	6.50R16	625	210/95R36 // 8.3R36	750	230/95R44 // 9.5R44	875 (1.85m)	320/90R50			
	260/70R16		270/95R32 // 11.2R32		270/95R42 // 11.2R42		340/85R48 // 13.6R48			
	280/65R16		340/85R28 // 13.6R28		340/85R38 // 13.6R38		380/90R46			
7.50R16	380/70R28		380/80R38		420/80R46					
250/80R16	420/85R24 // 16.9R24		400/75R38 // 15.5R38		480/80R42 // 18.4R42					
280/70R16	440/65R28		420/85R34 // 16.9R34		520/85R38 // 20.8R38					
320/65R16	480/60R28		480/70R34		580/70R38					
7.50R18	480/70R24		540/65R34		620/70R38					
280/70R18	500/70R24		600/60R34		650/65R38					
320/65R18	540/65R24		600/70R30		650/75R34					
410	7.50R20	650	230/95R36 // 9.5R36	775	620/75R26 // 23.1R26	925 (1.95m)	680/75R32 // 30.5LR32			
	280/70R20		320/85R32 // 12.4R32		710/60R30		710/60R38			
	340/65R18		380/85R28 // 14.9R28		750/65R26		800/65R32			
9.5R20	420/70R28		1000/50R25		1000/55R32					
260/80R20	420/75R28		270/95R44 // 11.2R44		1050/50R32					
300/70R20	480/65R28		460/85R34 // 18.4R34		270/95R54 // 11.2R54					
340/65R20	480/70R26		520/85R30		300/95R52 // 12.4R52					
11.2R20	520/60R28		520/70R34		320/90R54					
280/85R20	540/65R26		520/75R34		380/90R50					
320/70R20	270/95R36 // 11.2R36		600/65R34		480/80R46					
8.3R24	320/85R34 // 12.4R34	620/70R30	520/85R42 // 20.8R42							
500	250/85R24 // 9.5R24	675	380/85R30 // 14.9R30	800	650/60R34	975 (2.05m)	620/70R42			
	300/70R24		420/70R30		230/95R48 // 9.5R48		650/65R42			
	320/85R20 // 12.4R24		420/85R28 // 16.9R28		270/95R46 // 11.2R46		650/75R38			
	340/75R20		480/70R28		300/95R42 // 12.4R42		680/75R38			
	360/70R20		540/65R28		320/90R42		680/85R32			
	420/65R20		580/70R26		380/95R38		710/60R42			
525	280/85R24 // 11.2R24		700		600/60R28		825 (1.75m)	420/85R38 // 16.9R38	1025 (2.15m)	710/70R38
	320/70R24				750/50R26			480/70R38		710/75R34
	380/70R20				230/95R40 // 9.5R40			540/65R38		750/65R38
	380/75R20 // 13.6R20				270/95R38 // 11.2R38			600/60R38		800/70R32
	14.9LR20	320/85R36 // 12.4R36		620/75R30	900/50R42					
	440/65R20	420/85R30 // 16.9R30		650/70R30	900/60R32					
550	250/85R28 // 9.5R28	725		480/70R30	875 (2.05m)	650/75R30		1075 (2.30m)		380/90R54
	320/85R24 // 12.4R24			480/75R30		270/95R48 // 11.2R48				420/95R50
	340/65R28			520/80R26		300/95R46 // 12.4R46				480/80R50
	360/70R24			540/65R30		320/90R46				520/85R46 // 20.8R46
	420/65R24		600/60R30	340/85R46 // 13.6R46		580/85R42				
	210/95R32 // 8.3R32		600/65R28	460/85R38 // 18.4R38		620/70R46				
575	280/85R28 // 11.2R28		750	210/95R44 // 8.3R44		825 (1.75m)	520/70R38		1075 (2.30m)	650/85R38
	320/70R28			320/85R38 // 12.4R38			600/65R38			710/70R42
	340/85R24 // 13.6R24			340/85R36			620/75R34			800/70R38
	380/70R24			380/85R34			650/75R32 // 24.5R32			900/60R38
	400/70R24	420/90R30		650/65R34	480/95R50					
	440/65R24	460/85R30 // 18.4R30		650/60R38	650/85R42					
600	230/95R32 // 9.5R32	775		520/70R30	875 (2.05m)		710/60R34	1075 (2.30m)		710/75R42
	320/85R28 // 12.4R28			600/65R30			620/75R32			710/85R38
	360/70R28			600/70R28			650/75R32			900/60R42
	380/85R24 // 14.9R24			620/70R26			710/60R34			900/65R46
	420/65R28		710/55R30							
	420/70R24									
460/70R24										
480/65R24										



TAURUS POINT HP

✓ New tread pattern

- Longevity and comfort on the road
- Optimal traction and self-cleaning capacity

✓ Robust casing

- For a longer service life

SIZES

600/65 R28 154A8/154B TL

600/70 R30 158A8/158B TL

710/70 R38 171A8/171B TL

650/85 R38 173A8/173B TL

710/70 R42 173D TL

TAURUS POINT HP

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
28	600/65 R28 154A8/154B TL	084072	591	1491	746	4402	DW20B (A)		DW18 DW18L	717	405	48		
Bar	0.8 1.0 1.2 1.4 1.6 1.8 2.0 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8													
Psi	12 15 17 20 23 26 29 30 32 33 35 36 38 39 41													
10 km/h **	2990 3360 3690 4020 4350 4565 4775 4880 4990	5095	5200	5305	5415	5520	5625							
30 km/h	2220 2525 2805 3090 3370 3530 3695 3775 3855	3935	4015											
40 km/h	2055 2360 2625 2885 3150 3300 3450 3525 3600	3675	3750											
50 km/h	2360 2625 2885 3150 3300 3450 3525 3600	3675	3750											
40 km/h Dual	1810 2075 2305 2540 2770 2905 3035 3100 3170	3235	3300											

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
30	600/65 R30 158A8/158B TL	424355	591	1602	700	4730	DW20B (A)		DW18L	737	450	50		
Bar	0.8 1.0 1.2 1.4 1.6 1.8 2.0 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8													
Psi	12 15 17 20 23 26 29 30 32 33 35 36 38 39 41													
10 km/h **	3325 3750 4175 4600 5025 5250 5475 5590 5700	5815	5925	6040	6150	6265	6375							
30 km/h	2480 2835 3190 3550 3905 4065 4230 4310 4390	4470	4550											
40 km/h	2325 2650 2985 3315 3650 3800 3950 4025 4100	4175	4250											
50 km/h	2325 2650 2985 3315 3650 3800 3950 4025 4100	4175	4250											
40 km/h Dual	2045 2330 2625 2915 3210 3345 3475 3540 3610	3675	3740											

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
38	710/70 R38 171A8/171B TL	381004	719	1969	860	5838	DW23B (A)		DW25B (A) MW23B (A) MW25B (A)	804	811	55		
Bar	0.8 1.0 1.2 1.4 1.6 1.8 2.0 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8													
Psi	12 15 17 20 23 26 29 30 32 33 35 36 38 39 41													
10 km/h **	4865 5475 6090 6700 7315 7635 7950 8110 8270	8430	8590	8750	8905	9065	9225							
30 km/h	3630 4145 4655 5160 5670 5900 6125 6240 6355	6465	6580											
40 km/h	3390 3875 4350 4825 5300 5515 5725 5830 5940	6045	6150											
50 km/h	3390 3875 4350 4825 5300 5515 5725 5830 5940	6045	6150											
40 km/h Dual	2985 3410 3830 4245 4665 4850 5040 5130 5225	5315	5410											

* Refer to the notes at the end of the tables of this range

TAURUS POINT HP

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)
38	650/85 R38 173A8/173B TL	192125	696	2066	903	6135	DW23B (A)		DW20B (A) MW23B (A)	804	857	56
Bar	0.8 1.0 1.2 1.4 1.6 1.8 2.0 2.1 2.2 2.3 2.4	1.4 1.6 1.8 2.0 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8										
Psi	12 15 17 20 23 26 29 30 32 33 35	20 23 26 29 30 32 33 35 36 38 39 41										
10 km/h **	5000 5625 6250 6875 7500 7875 8250 8440 8625 8815 9000 9190 9375 9565 9750											
30 km/h	3745 4280 4795 5315 5830 6110 6395 6535 6675 6815 6955											
40 km/h	3500 4000 4485 4965 5450 5715 5975 6105 6240 6370 6500											
50 km/h	3500 4000 4485 4965 5450 5715 5975 6105 6240 6370 6500											
40 km/h Dual	3080 3520 3945 4370 4795 5025 5260 5375 5490 5605 5720											

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)
42	710/70 R42 173D TL	402666	716	2082	933	6181	DW23B (A)		DW25B (A) MW23B (A) MW25B (A)	802	872	59
Bar	0.8 1.0 1.2 1.4 1.6 1.8 2.0 2.1 2.2 2.3 2.4	1.4 1.6 1.8 2.0 2.1 2.2 2.3 2.4 2.5 2.6 2.7 2.8										
Psi	12 15 17 20 23 26 29 30 32 33 35	20 23 26 29 30 32 33 35 36 38 39 41										
10 km/h **	4800 5325 6000 6675 7350 8025 8700 8830 8965 9095 9225 9355 9490 9620 9750											
30 km/h	4065 4660 5250 5845 6440 6700 6960 7085 7215 7345 7475											
40 km/h	3855 4425 4990 5560 6130 6380 6625 6750 6875 6995 7120											
50 km/h	3695 4240 4790 5335 5880 6115 6355 6470 6590 6705 6825											
65 km/h	4000 4535 5065 5600 5825 6050 6165 6275 6390 6500											
40 km/h Dual	3405 3905 4400 4900 5395 5615 5830 5940 6050 6155 6265											

*IMPORTANT:

The inflation pressure must always be appropriate for the load per TYRE, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (July 2019). Technical data is subject to change without prior notice.

- For plowing and other field applications subject to high torque, use the 30 km/h line.
 - When using single TYRE configuration:
 - add 0.4 bar for use on slopes of more than 20%
 - add 0.4 bar for intensive road use exceeding 50%
- **10 km/h LT (Low Torque) (max speed 10 km/h).



TAURUS POINT 65

- ✓ Tread pattern providing greater soil protection
- ✓ Lower tyre pressure
- ✓ Improved yield

SIZES

440/65 R24 128A8/128B TL

480/65 R24 133A8/133B TL

480/65 R28 136A8/136B TL

540/65 R28 142A8/142B TL

540/65 R30 143A8/143B TL

540/65 R34 145A8/145B TL

600/65 R34 151A8/151B TL

600/65 R38 153A8/153B TL

650/65 R38 157A8/157B TL

650/65 R42 158A8/158B TL

TAURUS POINT 65

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
24	440/65 R24 128A8/128B TL	529617	430	1194	528	3542	DW14L		DW13 DW15L W13 W14L W15L	703	154	39		
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **		1645	1840	1940	2040	2110	2185	2255	2325	2420	2515	2605	2700	
30 km/h		1260	1455	1560	1660	1725	1795	1860	1925					
40 km/h			1360	1455	1550	1615	1675	1740	1800					
50 km/h			1360	1455	1550	1615	1675	1740	1800					
40 km/h Dual		1045	1200	1285	1365	1420	1475	1530	1585					

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
24	480/65 R24 133A8/133B TL	224881	471	1234	548	3657	DW15L		DW14L W14L W15L	710	218	40		
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **		1860	2040	2140	2235	2335	2430	2530	2625	2740	2860	2975	3090	
30 km/h		1420	1660	1770	1875	1960	2040	2125	2205					
40 km/h			1550	1650	1750	1830	1905	1985	2060					
50 km/h			1550	1650	1750	1830	1905	1985	2060					
40 km/h Dual		1200	1365	1455	1540	1610	1680	1745	1815					

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
28	480/65 R28 136A8/136B TL	632102	479	1337	591	3959	DW15L		DW14L W14L W15L	822	242	42		
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **		1995	2235	2355	2475	2630	2785	2935	3090	3155	3220	3285	3350	
30 km/h		1560	1795	1915	2035	2125	2220	2310	2400					
40 km/h			1650	1775	1900	1985	2070	2155	2240					
50 km/h			1650	1775	1900	1985	2070	2155	2240					

* Refer to the notes at the end of the tables of this range

TAURUS POINT 65

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
28	540/65 R28 142A8/142B TL	987252	529	1414	622	4187	DW16L		DW18L W16L		822	317	45	
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **	2000	2335	2665	2835	3000	3125	3250	3375	3500	3625	3750	3875	4000	
30 km/h	1605	1870	2135	2270	2400	2510	2620	2730	2840					
40 km/h		1750	2000	2120	2240	2345	2445	2550	2650					
50 km/h			2000	2120	2240	2345	2445	2550	2650					

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
30	540/65 R30 143A8/143B TL	391329	522	1470	648	4347	DW16L		DW18L W16L W18L		754	333	45	
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **		2480	2785	2935	3090	3285	3475	3670	3860	3920	3975	4035	4090	
30 km/h		1925	2190	2325	2460	2575	2690	2800	2915					
40 km/h			2060	2180	2300	2405	2515	2620	2725					
50 km/h			2060	2180	2300	2405	2515	2620	2725					

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
34	540/65 R34 145A8/145B TL	688712	540	1560	692	4621	DW16L		DW18L W16L W18L		704	364	44	
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **	2325	2610	2895	3040	3180	3325	3465	3610	3750	3870	3990	4110	4230	4350
30 km/h	1765	2070	2370	2525	2675	2785	2890	3000	3105					
40 km/h	1650	1935	2215	2360	2500	2600	2700	2800	2900					
50 km/h	1650	1935	2215	2360	2500	2600	2700	2800	2900					
40 km/h Dual	1450	1700	1950	2075	2200	2290	2375	2465	2550					

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)	
34	600/65 R34 151A8/151B TL	681849	591	1644	736	4880	DW20B (A)		DW18L W18L		823	461	47	
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **		3110	3485	3675	3860	4025	4190	4355	4520	4680	4845	5010	5175	
30 km/h		2420	2755	2930	3105	3250	3400	3545	3690					
40 km/h			2575	2740	2900	3040	3175	3315	3450					
50 km/h			2575	2740	2900	3040	3175	3315	3450					
40 km/h Dual		1950	2265	2410	2550	2670	2795	2915	3035					

* Refer to the notes at the end of the tables of this range

TAURUS POINT 65

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)			
38	600/65 R38 153A8/153B TL	579551	591	1745	787	5188	DW20B (A)	DW18LW18L	825	498	51			
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **	3290	3690	3890	4090	4265	4435	4610	4785	4955	5130	5300	5475		
30 km/h	2530	2925	3090	3250	3415	3580	3740	3905						
40 km/h		2735	2905	3075	3220	3365	3505	3650						
50 km/h		2735	2905	3075	3220	3365	3505	3650						

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)			
38	650/65 R38 157A8/157B TL	764412	645	1811	812	5378	DW20B (A)		825	599	52			
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **	3680	4145	4380	4610	4805	4995	5190	5380	5575	5765	5960	6150		
30 km/h	2880	3290	3480	3665	3855	4040	4230	4415						
40 km/h		3265	3510	3750	3845	3940	4030	4125						
50 km/h		3265	3510	3750	3845	3940	4030	4125						

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)			
42	650/65 R42 158A8/158B TL	271958	633	1924	858	5708	DW20B (A)		802	643	52			
Bar	0.6	0.8	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
Psi	9	12	15	16	17	19	20	22	23	25	26	28	29	30
10 km/h **	2925	3505	4080	4370	4655	4945	5235	5520	5810	5935	6055	6180	6300	
30 km/h	2525	3070	3610	3765	3925	4080	4235	4395	4550					
40 km/h	2360	2865	3370	3515	3665	3810	3955	4105	4250					
50 km/h	2360	2865	3370	3515	3665	3810	3955	4105	4250					

*IMPORTANT:

The inflation pressure must always be appropriate for the load per TYRE, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (July 2019). Technical data is subject to change without prior notice.

- For plowing and other field applications subject to high torque, use the 30 km/h line.
- When using single TYRE configuration:
 - add 0.4 bar for use on slopes of more than 20%
 - add 0.4 bar for intensive road use exceeding 50%
- **10 km/h LT (Low Torque) (max speed 10 km/h).



TAURUS POINT 70

- ✓ Low profile tyres result in more benefits when working the land
- ✓ Heavy-duty design for agricultural work

SIZES

320/70 R24 116A8/116B TL
360/70 R24 122A8/122B TL
380/70 R24 125A8/125B TL
420/70 R24 130A8/130B TL
480/70 R24 138A8/138B TL
360/70 R28 125A8/125B TL

380/70 R28 127A8/127B TL
420/70 R28 133A8/133B TL
480/70 R28 140A8/140B TL
480/70 R30 141A8/141B TL
480/70 R34 143A8/143B TL
520/70 R34 148A8/148B TL

480/70 R38 145A8/145B TL
520/70 R38 150A8/150B TL
580/70 R38 155A8/155B TL
620/70 R42 160A8/160B TL

TAURUS POINT 70

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	320/70 R24 116A8/116B TL	723294	311	1092	495	3252	W10		W11		692	104	39
Bar	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
Psi	12	13	15	16	17	19	20	22	23	25	26	28	29
10 km/h **	1130	1195	1255	1320	1385	1450	1515	1580	1645	1705	1770	1835	1900
30 km/h	850	915	980	1040	1105	1170	1235	1295	1360				
40 km/h	800	855	915	970	1025	1080	1140	1195	1250				
50 km/h									1250				

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	360/70 R24 122A8/122B TL	007646	357	1152	514	3416	W11		W10 W12		692	124	40
Bar	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
Psi	12	13	15	16	17	19	20	22	23	25	26	28	29
10 km/h **	1330	1405	1485	1560	1635	1710	1785	1860	1935	2015	2090	2165	2240
30 km/h	1030	1100	1175	1245	1315	1385	1460	1530	1600				
40 km/h	950	1020	1090	1155	1225	1295	1365	1430	1500				
50 km/h									1500				

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	380/70 R24 125A8/125B TL	604562	380	1190	525	3521	W12		W11 W13		700	140	41
Bar	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
Psi	12	13	15	16	17	19	20	22	23	25	26	28	29
10 km/h **	1450	1530	1610	1695	1775	1860	1940	2020	2105	2185	2265	2350	2430
30 km/h	1120	1200	1280	1355	1435	1515	1595	1670	1750				
40 km/h	1060	1135	1210	1280	1355	1430	1505	1575	1650				
50 km/h									1650				

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	420/70 R24 130A8/130B TL	677050	415	1245	553	3690	W13		DW14L W12 W14L		703	194	42
Bar	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
Psi	12	13	15	16	17	19	20	22	23	25	26	28	29
10 km/h **	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900
30 km/h	1320	1415	1505	1600	1690	1785	1875	1970	2060				
40 km/h	1215	1300	1385	1470	1560	1645	1730	1815	1900				
50 km/h									1900				

* Refer to the notes at the end of the tables of this range

TAURUS POINT 70

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	480/70 R24 138A8/138B TL	928586	479	1316	577	3888	DW15L		DW14L DW16L W14L W15L W16L		710	241	45
Bar	0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6	1.7 1.8 1.9 2.0											
Psi	12 13 15 16 17 19 20 22 23	25 26 28 29											
10 km/h **	2095	2215	2335	2455	2580	2700	2820	2945	3065	3185	3305	3430	3550
30 km/h	1600	1715	1825	1940	2050	2165	2275	2390	2500				
40 km/h	1500	1610	1715	1825	1930	2040	2145	2255	2360				
50 km/h										2360			

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
28	360/70 R28 125A8/125B TL	423583	357	1251	563	3717	W11		W10 W12		726	138	40
Bar	0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6	1.7 1.8 1.9 2.0											
Psi	12 13 15 16 17 19 20 22 23	25 26 28 29											
10 km/h **	1450	1530	1610	1695	1775	1860	1940	2020	2105	2185	2265	2350	2430
30 km/h	1120	1200	1280	1355	1435	1515	1595	1670	1750				
40 km/h	1030	1110	1185	1265	1340	1420	1495	1575	1650				
50 km/h										1650			

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
28	380/70 R28 127A8/127B TL	405953	380	1293	583	3842	W12		W11 W13		732	156	41
Bar	0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6	1.7 1.8 1.9 2.0											
Psi	12 13 15 16 17 19 20 22 23	25 26 28 29											
10 km/h **	1580	1670	1755	1845	1935	2025	2115	2205	2295	2380	2470	2560	2650
30 km/h	1215	1300	1385	1470	1560	1645	1730	1815	1900				
40 km/h	1120	1200	1280	1355	1435	1515	1595	1670	1750				
50 km/h										1750			

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
28	420/70 R28 133A8/133B TL	212493	419	1350	605	4008	W13		DW14L W12 W14L		821	219	42
Bar	0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6	1.7 1.8 1.9 2.0											
Psi	12 13 15 16 17 19 20 22 23	25 26 28 29											
10 km/h **	1810	1915	2020	2125	2230	2340	2445	2550	2655	2760	2865	2970	3075
30 km/h	1400	1500	1595	1695	1790	1890	1985	2085	2180				
40 km/h	1320	1415	1505	1600	1690	1785	1875	1970	2060				
50 km/h										2060			

* Refer to the notes at the end of the tables of this range

TAURUS POINT 70

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
28	480/70 R28 140A8/140B TL	976420	476	1422	633	4214	DW15L		DW14L DW16L W14L W15L W16L		822	293	46
Bar	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
Psi	12	13	15	16	17	19	20	22	23	25	26	28	29
10 km/h **	2250	2375	2500	2625	2750	2875	3000	3125	3250	3375	3500	3625	3750
30 km/h	1700	1830	1955	2085	2215	2340	2470	2595	2725				
40 km/h	1600	1715	1825	1940	2050	2165	2275	2390	2500				
50 km/h									2500				

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
30	480/70 R30 141A8/141B TL	683605	479	1480	661	4392	DW15L		DW14L DW16L W14L W15L W16L		754	307	45
Bar	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
Psi	12	13	15	16	17	19	20	22	23	25	26	28	29
10 km/h **	2320	2450	2580	2710	2840	2970	3095	3225	3355	3485	3615	3745	3875
30 km/h	1750	1880	2015	2145	2275	2405	2540	2670	2800				
40 km/h	1650	1765	1880	1995	2115	2230	2345	2460	2575				
50 km/h									2575				

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
34	480/70 R34 143A8/143B TL	369476	468	1583	709	4701	DW15L		DW14L DW16L W14L W15L W16L		704	334	48
Bar	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0
Psi	12	13	15	16	17	19	20	22	23	25	26	28	29
10 km/h **	2390	2525	2655	2790	2925	3060	3195	3330	3465	3595	3730	3865	4000
30 km/h	1850	1980	2115	2245	2375	2505	2640	2770	2900				
40 km/h	1700	1830	1955	2085	2215	2340	2470	2595	2725				
50 km/h									2725				

* Refer to the notes at the end of the tables of this range

TAURUS POINT 70

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
34	520/70 R34 148A8/148B TL	061874	509	1641	735	4874	DW16L		DW15L DW18L W15L W16L W18L		823	398	48
Bar	0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6	1.7 1.8 1.9 2.0											
Psi	12 13 15 16 17 19 20 22 23	25 26 28 29											
10 km/h **	2745	2900	3055	3215	3370	3530	3685	3840	4000	4155	4310	4470	4625
30 km/h	2120	2275	2430	2580	2735	2890	3045	3195	3350				
40 km/h	2000	2145	2290	2430	2575	2720	2865	3005	3150				
50 km/h										3150			

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
38	480/70 R38 145A8/145B TL	794424	474	1684	759	5010	DW15L		DW14L DW16L W14L W15L W16L		786	362	48
Bar	0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6	1.7 1.8 1.9 2.0											
Psi	12 13 15 16 17 19 20 22 23	25 26 28 29											
10 km/h **	2595	2745	2895	3040	3190	3340	3485	3635	3780	3930	4080	4225	4375
30 km/h	2000	2145	2290	2430	2575	2720	2865	3005	3150				
40 km/h	1850	1980	2115	2245	2375	2505	2640	2770	2900				
50 km/h										2900			

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
38	520/70 R38 150A8/150B TL	250048	515	1762	789	5229	DW16L		DW15L DW18L W15L W16L W18L		824	434	48
Bar	0.8 0.9 1.0 1.1 1.2 1.3 1.4 1.5 1.6	1.7 1.8 1.9 2.0											
Psi	12 13 15 16 17 19 20 22 23	25 26 28 29											
10 km/h **	3005	3185	3365	3545	3720	3900	4080	4255	4435	4615	4795	4970	5150
30 km/h	2300	2470	2640	2805	2975	3145	3310	3480	3650				
40 km/h	2180	2325	2475	2620	2765	2910	3060	3205	3350				
50 km/h										3350			

* Refer to the notes at the end of the tables of this range

TAURUS POINT 70

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
38	580/70 R38 155A8/155B TL	642040	560	1831	820	5436	DW18L	W18L	825	557	51		
Bar	0.8 0.9 1.0	1.1 1.2 1.3	1.4 1.5 1.6	1.7 1.8 1.9	2.0								
Psi	12 13 15	16 17 19	20 22 23	25 26 28	29								
10 km/h **	3465	3660	3855	4050	4245	4440	4630	4825	5020	5215	5410	5605	5800
30 km/h	2650	2835	3020	3205	3390	3570	3755	3940	4125				
40 km/h	2500	2670	2845	3015	3190	3360	3530	3705	3875				
50 km/h									3875				

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
42	620/70 R42 160A8/160B TL	680909	625	1935	861	5736	DW20B (A)	DW18L	802	658	53		
Bar	0.8 0.9 1.0	1.1 1.2 1.3	1.4 1.5 1.6	1.7 1.8 1.9	2.0								
Psi	12 13 15	16 17 19	20 22 23	25 26 28	29								
10 km/h **	3535	3645	3905	4170	4430	4690	4950	5215	5475	5795	6115	6430	6750
30 km/h	3035	3255	3470	3690	3905	4135	4360	4590	4815				
40 km/h	2835	3040	3245	3445	3650	3865	4075	4290	4500				
50 km/h	2835	3040	3245	3445	3650	3865	4075	4290	4500				
40 km/h Dual	2495	2675	2855	3030	3210	3400	3585	3775	3960				

*IMPORTANT:

The inflation pressure must always be appropriate for the load per TYRE, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (July 2019). Technical data is subject to change without prior notice.

- For plowing and other field applications subject to high torque, use the 30 km/h line.
 - When using single TYRE configuration:
 - add 0.4 bar for use on slopes of more than 20%
 - add 0.4 bar for intensive road use exceeding 50%
- **10 km/h LT (Low Torque) (max speed 10 km/h).



TAURUS POINT 7S

- ✓ Specific tread pattern
- ✓ Outstanding traction
- ✓ Effective self-cleaning grooves
- ✓ Tubeless

SIZES

400/75 R38 138A8/135B TL

TAURUS POINT 7S

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)		Tread depth (mm)
38	400/75 R38 138A8/135B TL (1,5 R38)	924529	404	1565	708	4711	DW14L		DW12 W12 W14L		796	235		42
Bar	0.6 0.7 0.8 0.9 1.0 1.1 1.2 1.3 1.4	0.6 0.7 0.8 0.9 1.0 1.1 1.2 1.3 1.4	1.5 1.6 1.7 1.8 1.9 2.0	2.2 2.3 2.4 2.5 2.6 2.7	2.8 2.9 3.0 3.1 3.2 3.3	3.4 3.5 3.6 3.7 3.8 3.9	4.0 4.1 4.2 4.3 4.4 4.5	4.6 4.7 4.8 4.9 5.0	5.1 5.2 5.3 5.4 5.5	5.6 5.7 5.8 5.9 6.0	6.1 6.2 6.3 6.4 6.5	6.6 6.7 6.8 6.9 7.0	7.1 7.2 7.3 7.4 7.5	7.6 7.7 7.8 7.9 8.0
Psi	9 10 12 13 15 16 17 19 20	9 10 12 13 15 16 17 19 20	22 23 24 25 26 27	28 29 30 31 32 33	34 35 36 37 38 39	40 41 42 43 44 45	46 47 48 49 50	51 52 53 54 55	56 57 58 59 60	61 62 63 64 65	66 67 68 69 70	71 72 73 74 75	76 77 78 79 80	81 82 83 84 85
10 km/h **	1590 1730 1870 2010	2145 2285 2425 2565	2705 2845 2985 3120	3260 3400 3540										
30 km/h	1370 1485 1600 1720	1835 1950 2065 2180	2300 2415 2530											
40 km/h		1690 1800 1915 2025	2135 2250 2360											
50 km/h			1750 1845 1935 2030	2120										

*IMPORTANT:

The inflation pressure must always be appropriate for the load per TYRE, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (July 2019). Technical data is subject to change without prior notice.

- For plowing and other field applications subject to high torque, use the 30 km/h line.
 - When using single TYRE configuration:
 - add 0.4 bar for use on slopes of more than 20%
 - add 0.4 bar for intensive road use exceeding 50%
- **10 km/h LT (Low Torque) (max speed 10 km/h).



TAURUS POINT 8

- ✓ Standard 85-series
- ✓ Modern tread pattern design
- ✓ Tubeless
- ✓ Proven durability

SIZES

11.2 R20 111A8/108B TL

11.2 R24 114A8/111B TL

12.4 R24 119A8/116B TL

13.6 R24 121A8/118B TL

14.9 R24 126A8/123B TL

16.9 R24 134A8/131B TL

11.2 R28 116A8/113B TL

12.4 R28 121A8/118B TL

13.6 R28 123A8/120B TL

14.9 R28 128A8/125B TL

16.9 R28 136A8/133B TL

14.9 R30 129A8/126B TL

16.9 R30 137A8/134B TL

18.4 R30 142A8/139B TL

12.4 R32 122A8/119B TL

16.9 R34 139A8/136B TL

18.4 R34 144A8/141B TL

12.4 R36 124A8/121B TL

13.6 R36 127A8/124B TL

13.6 R38 128A8/125B TL

16.9 R38 141A8/138B TL

18.4 R38 146A8/143B TL

20.8 R38 153A8/150B TL

20.8 R42 155A8/152B TL

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
20	11.2 R20 111A8/108B TL	085018	295	995	446	2954	W10	W7 W8 W9	542	75	37		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	780	880	980	1025	1070	1155	1240	1275	1310	1385	1460		
25 km/h	640	725	810	850	890	960	1030	1055	1080	1145	1210		
30 km/h	620	700	780	820	860	925	990	1015	1040	1105	1170		
40 km/h	580	655	730	765	800	865	925	950	975	1035	1090		
50 km/h							840	865	890	940	990		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	11.2 R24 114A8/111B TL	523567	283	1084	497	3253	W10	W9	692	80	42		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	820	930	1040	1090	1140	1240	1340	1380	1420	1500	1580		
25 km/h	680	770	860	900	940	1025	1110	1145	1180	1245	1310		
30 km/h	660	745	830	870	910	990	1070	1100	1130	1195	1260		
40 km/h	615	695	775	815	850	925	1000	1030	1060	1120	1180		
50 km/h							910	935	960	1015	1070		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	12.4 R24 119A8/116B TL	039023	325	1141	517	3396	W11	W10 W9	692	116	42		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	950	1080	1210	1275	1340	1440	1540	1585	1630	1725	1820		
25 km/h	790	895	1000	1055	1110	1195	1280	1315	1350	1430	1510		
30 km/h	760	860	960	1015	1070	1150	1230	1265	1300	1380	1460		
40 km/h	710	805	900	950	1000	1075	1150	1185	1215	1290	1360		
50 km/h							1050	1080	1110	1175	1240		

* Refer to the notes at the end of the tables of this range

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	13.6 R24 121A8/118B TL	039029	359	1196	536	3578	W12		W11		700	137	46
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1010	1140	1270	1325	1380	1480	1580	1630	1680	1810	1940		
25 km/h	830	940	1050	1095	1140	1225	1310	1350	1390	1500	1610		
30 km/h	800	910	1020	1060	1100	1180	1260	1300	1340	1445	1550		
40 km/h	750	850	950	990	1030	1105	1180	1215	1250	1350	1450		
50 km/h							1070	1105	1140	1230	1320		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	14.9 R24 126A8/123B TL	733804	390	1250	561	3710	W13		W11 W12		703	176	46
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1170	1335	1500	1565	1630	1755	1880	1945	2010	2145	2280		
25 km/h	970	1105	1240	1295	1350	1450	1550	1610	1670	1780	1890		
30 km/h	940	1070	1200	1250	1300	1400	1500	1555	1610	1715	1820		
40 km/h	875	995	1120	1170	1215	1310	1400	1450	1500	1600	1700		
50 km/h							1270	1320	1370	1460	1550		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
24	16.9 R24 134A8/131B TL	615665	454	1324	594	3933	DW15L		DW14L W14L W15L		710	228	44
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1270	1450	1630	1810	1990	2170	2350	2475	2595	2720	2840		
25 km/h	1050	1200	1345	1495	1645	1790	1940	2045	2145	2250	2350		
30 km/h	1020	1160	1305	1445	1585	1730	1870	1970	2070	2170	2270		
40 km/h	950	1085	1215	1350	1485	1615	1750	1845	1935	2030	2120		
50 km/h							1500	1600	1700	1800	1900		

* Refer to the notes at the end of the tables of this range

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
28	11.2 R28 116A8/113B TL	093269	291	1201	554	3622	W10	W9	725	99	43		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	870	990	1110	1175	1240	1330	1420	1460	1500	1590	1680		
25 km/h	720	820	920	975	1030	1105	1180	1210	1240	1315	1390		
30 km/h	700	790	880	935	990	1060	1130	1165	1200	1270	1340		
40 km/h	650	740	825	875	925	995	1060	1090	1120	1185	1250		
50 km/h							960	990	1020	1080	1140		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
28	12.4 R28 121A8/118B TL	093032	323	1254	573	3770	W11	W10 W9	726	128	43		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1040	1175	1310	1365	1420	1525	1630	1700	1770	1855	1940		
25 km/h	860	970	1080	1130	1180	1265	1350	1410	1470	1540	1610		
30 km/h	830	935	1040	1085	1130	1215	1300	1355	1410	1480	1550		
40 km/h	775	875	975	1020	1060	1140	1215	1270	1320	1385	1450		
50 km/h							1110	1155	1200	1260	1320		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
28	13.6 R28 123A8/120B TL	093283	370	1284	579	3817	W12	W11	732	150	45		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1070	1205	1340	1400	1460	1590	1720	1770	1820	1950	2080		
25 km/h	890	1000	1110	1160	1210	1320	1430	1470	1510	1615	1720		
30 km/h	860	965	1070	1120	1170	1270	1370	1415	1460	1560	1660		
40 km/h	800	900	1000	1045	1090	1190	1285	1325	1360	1455	1550		
50 km/h							1170	1205	1240	1325	1410		

* Refer to the notes at the end of the tables of this range

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
28	14.9 R28 128A8/125B TL	869675	406	1347	604	3999	W13	W12	W12	W12	821	193	43
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1270	1425	1580	1675	1770	1890	2075	2140	2275	2410			
25 km/h	1050	1180	1310	1390	1470	1570	1670	1725	1780	1890	2000		
30 km/h	1020	1140	1260	1335	1410	1510	1610	1660	1710	1820	1930		
40 km/h	950	1065	1180	1250	1320	1410	1500	1550	1600	1700	1800		
50 km/h							1370	1415	1460	1550	1640		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
28	16.9 R28 136A8/133B TL	039043	446	1418	628	4240	DW15L	DW14L	W14L	W15L	822	248	48
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1540	1740	1940	2040	2140	2310	2480	2545	2610	2805	3000		
25 km/h	1280	1445	1610	1695	1780	1915	2050	2105	2160	2325	2490		
30 km/h	1230	1390	1550	1630	1710	1845	1980	2035	2090	2245	2400		
40 km/h	1150	1300	1450	1525	1600	1725	1850	1900	1950	2095	2240		
50 km/h							1680	1725	1770	1905	2040		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
30	14.9 R30 129A8/126B TL	527022	384	1408	633	4185	W13	W12	W12	W12	734	211	46
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1310	1470	1630	1725	1820	1950	2080	2145	2210	2345	2480		
25 km/h	1080	1215	1350	1430	1510	1615	1720	1775	1830	1940	2050		
30 km/h	1040	1170	1300	1380	1460	1560	1660	1715	1770	1875	1980		
40 km/h	975	1095	1215	1290	1360	1455	1550	1600	1650	1750	1850		
50 km/h							1410	1455	1500	1590	1680		

* Refer to the notes at the end of the tables of this range

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
30	16.9 R30 137A8/1348 TL	093248	452	1463	655	4343	DW15L		DW14L W14L W15L		754	268	48
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1580	1795	2010	2110	2210	2380	2550	2615	2680	2880	3080		
25 km/h	1310	1490	1670	1750	1830	1970	2110	2165	2220	2385	2550		
30 km/h	1260	1435	1610	1690	1770	1900	2030	2085	2140	2300	2460		
40 km/h	1180	1340	1500	1575	1650	1775	1900	1950	2000	2150	2300		
50 km/h							1730	1775	1820	1955	2090		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
30	18.4 R30 142A8/1398 TL	039066	467	1545	675	4613	DW16L		DW15L W15L W16L		757	350	49
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1880	2115	2350	2480	2610	2805	3000	3080	3160	3355	3550		
25 km/h	1550	1745	1940	2050	2160	2325	2490	2555	2620	2780	2940		
30 km/h	1500	1685	1870	1980	2090	2245	2400	2465	2530	2685	2840		
40 km/h	1400	1575	1750	1850	1950	2095	2240	2300	2360	2505	2650		
50 km/h							2040	2095	2150	2280	2410		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
32	12.4 R32 122A8/1198 TL	093280	327	1350	611	4016	W11		W10		760	137	45
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1040	1190	1340	1400	1460	1570	1680	1750	1820	1915	2010		
25 km/h	860	985	1110	1160	1210	1300	1390	1450	1510	1590	1670		
30 km/h	830	950	1070	1120	1170	1255	1340	1400	1460	1535	1610		
40 km/h	775	890	1000	1045	1090	1170	1250	1305	1360	1430	1500		
50 km/h							1140	1190	1240	1305	1370		

* Refer to the notes at the end of the tables of this range

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
34	16.9 R34 139A8/136B TL	039010	448	1573	706	4672	DW15L	DW15L	W14L W15L	704	288	48	
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1675	1845	2010	2180	2345	2515	2680	2770	2860	2950	3040		
25 km/h	1390	1530	1670	1805	1945	2085	2220	2340	2460	2575	2695		
30 km/h	1340	1475	1605	1740	1875	2005	2140	2255	2370	2485	2600		
40 km/h	1250	1375	1500	1625	1750	1875	2000	2110	2215	2325	2430		
50 km/h							1820	1920	2015	2115	2210		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
34	18.4 R34 144A8/141B TL	625296	480	1646	740	4890	DW16L	DW15L	W15L W16L	823	362	49	
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	2010	2280	2550	2655	2760	3010	3260	3355	3450	3600	3750		
25 km/h	1670	1890	2110	2200	2290	2495	2700	2780	2860	2985	3110		
30 km/h	1610	1820	2030	2115	2200	2400	2600	2680	2760	2880	3000		
40 km/h	1500	1700	1900	1980	2060	2245	2430	2505	2575	2690	2800		
50 km/h							2210	2275	2340	2445	2550		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
36	12.4 R36 124A8/121B TL	039036	318	1455	668	4375	W11	W10	W10	779	152	43	
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1140	1280	1420	1480	1540	1680	1820	1880	1940	2040	2140		
25 km/h	940	1060	1180	1230	1280	1395	1510	1560	1610	1695	1780		
30 km/h	910	1020	1130	1180	1230	1345	1460	1505	1550	1630	1710		
40 km/h	850	955	1060	1105	1150	1255	1360	1405	1450	1525	1600		
50 km/h							1240	1280	1320	1390	1460		

* Refer to the notes at the end of the tables of this range

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
36	13.6 R36 127A8/124B TL	039039	364	1500	685	4473	W12	W11	780	189	45		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1240	1410	1580	1650	1720	1865	2010	2045	2080	2215	2350		
25 km/h	1030	1170	1310	1370	1430	1550	1670	1695	1720	1830	1940		
30 km/h	990	1125	1260	1315	1370	1490	1610	1635	1660	1765	1870		
40 km/h	925	1055	1180	1235	1285	1395	1500	1525	1550	1650	1750		
50 km/h							1370	1390	1410	1500	1590		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
38	13.6 R38 128A8/125B TL	039041	369	1559	710	4646	DW12	W11 W12	795	206	46		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
15 km/h	1270	1425	1580	1675	1770	1890	2010	2075	2140	2275	2410		
25 km/h	1050	1180	1310	1390	1470	1570	1670	1725	1780	1890	2000		
30 km/h	1020	1140	1260	1335	1410	1510	1610	1660	1710	1820	1930		
40 km/h	950	1065	1180	1250	1320	1410	1500	1550	1600	1700	1800		
50 km/h							1370	1415	1460	1550	1640		

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
38	16.9 R38 141A8/138B TL	093446	439	1677	757	5030	DW15L	DW14L W14L W15L	786	313	49		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
10 km/h **		2100	2250	2400	2550	2700	2850	3105	3360	3615	3870		
30 km/h		1660	1785	1905	2030	2150	2275	2395	2515	2640	2760		
40 km/h					1850	1985	2120	2235	2350	2460	2575		
50 km/h							1930	1985	2040	2190	2340		
max 40 km/h FRT							2220	2365	2510	2655	2800	2945	3090

* Refer to the notes at the end of the tables of this range

TAURUS POINT 8

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
38	18.4 R38 146A8/143B TL	521555	498	1755	783	5205	DW16L	DW15L W15L W16L	824	418	47		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
10 km/h **	2475	2635	2795	2950	3110	3270	3580	3885	4195	4500			
30 km/h	1930	2030	2130	2230	2330	2475	2625	2770	2915	3065	3210		
40 km/h				2180	2380	2575	2680	2790	2895	3000			
50 km/h						2340	2410	2480	2605	2730			
max 40 km/h FRT						2615	2780	2945	3110	3270	3435	3600	

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
38	20.8 R38 153A8/150B TL	413224	525	1846	822	5473	DW18L	DW16L W16L W18L	825	510	50		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
10 km/h **	3000	3195	3390	3585	3780	3975	4350	4725	5100	5475			
30 km/h	2330	2500	2670	2840	3020	3195	3375	3555	3730	3910			
40 km/h				2650	2865	3075	3220	3365	3505	3650			
50 km/h						2800	2880	2960	3140	3320			
max 40 km/h FRT						3180	3380	3580	3780	3980	4180	4380	

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
42	20.8 R42 155A8/152B TL	659276	523	1940	870	5761	DW18L	DW16L W16L W18L	802	548	50		
Bar	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8
Psi	9	10	12	13	15	16	17	19	20	22	23	25	26
10 km/h **	3180	3385	3590	3790	3995	4200	4405	4605	4810	5010	5215	5415	
30 km/h	2400	2600	2800	3000	3215	3435	3650	3865	4085	4300			
40 km/h				2855	3055	3250	3405	3565	3720	3875			
50 km/h						2960	3110	3255	3405	3550			
max 40 km/h FRT						3425	3630	3835	4040	4240	4445	4650	

*IMPORTANT:

The inflation pressure must always be appropriate for the load per TYRE, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (July 2019). Technical data is subject to change without prior notice.

- For plowing and other field applications subject to high torque, use the 30 km/h line.
- When using single TYRE configuration:
 - add 0.4 bar for use on slopes of more than 20%
 - add 0.4 bar for intensive road use exceeding 50%
- **10 km/h LT (Low Torque) (max speed 10 km/h).



TAURUS RC 95 SOILSAVER

- ✓ Tread pattern designed for plant protection
- ✓ Good self-cleaning ability

SIZES

230/95 R32 128A8/128B TL

270/95 R32 136A8/136B TL

230/95 R36 130A8/130B TL

270/95 R36 139A8/139B TL

270/95 R38 140A8/140B TL

270/95 R42 141A8/141B TL

230/95 R44 134A8/134B TL

270/95 R44 142A8/142B TL

300/95 R46 148A8/148B TL

230/95 R48 136A8/136B TL

270/95 R48 144A8/144B TL

340/85 R48 152A8/152B TL

380/90 R50 160A8/160B TL

TAURUS RC 95 SOILSAVER

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)				
32	230/95 R32 128A8/128B TL <i>9.5 R32</i>	965452	228	1250	579	3740	W8	W7	758	75	31				
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	1405	1520	1630	1745	1855	1960	2065	2145	2230	2310	2395	2475	2555	2720	
30 km/h Cyc	1315	1375	1430	1490	1545	1590	1635	1715	1790	1870	1945	2025	2100		
25 km/h	1280	1340	1395	1455	1510	1560	1610	1675	1740	1805	1870	1935	2000		
30 km/h	1230	1285	1345	1400	1455	1505	1550	1615	1675	1740	1800	1865	1925		
40 km/h	1150	1205	1255	1310	1360	1405	1450	1510	1565	1625	1685	1740	1800		
50 km/h					1360	1405	1450	1510	1565	1625	1685	1740	1800		
max 40 km/h FRT													1920	2040	2160

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)				
32	270/95 R32 136A8/136B TL <i>11.2 R32</i>	085528	263	1310	600	3902	W8	W10	763	105	35				
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	1800	1945	2090	2235	2380	2510	2635	2745	2850	2960	3070	3175	3285	3500	
30 km/h Cyc	1635	1710	1785	1855	1930	2015	2100	2190	2275	2365	2450	2540	2625		
25 km/h	1610	1680	1750	1820	1890	1970	2050	2125	2195	2270	2340	2415	2485		
30 km/h	1550	1620	1685	1755	1820	1900	1980	2050	2120	2190	2255	2325	2395		
40 km/h	1450	1515	1575	1640	1700	1775	1850	1915	1980	2045	2110	2175	2240		
50 km/h					1700	1775	1850	1915	1980	2045	2110	2175	2240		
max 40 km/h FRT													2470	2580	2690

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)				
36	230/95 R36 130A8/130B TL <i>9.5 R36</i>	245116	234	1354	632	4063	W8	W7	779	84	31				
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	1500	1635	1770	1905	2040	2115	2195	2270	2365	2455	2550	2625	2700		
30 km/h Cyc	1390	1455	1520	1585	1650	1715	1775	1840	1910	1980	2050	2150	2250		
25 km/h	1350	1415	1480	1545	1610	1670	1730	1790	1860	1930	2000	2055	2110		
30 km/h	1300	1365	1425	1490	1550	1610	1670	1730	1795	1865	1930	1985	2035		
40 km/h	1215	1275	1335	1390	1450	1505	1555	1610	1675	1735	1800	1850	1900		
50 km/h					1450	1505	1555	1610	1675	1735	1800	1850	1900		
max 40 km/h FRT														2185	2280

* Refer to the notes at the end of the tables of this range

TAURUS RC 95 SOILSAVER

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
36	270/95 R36 139A8/139B TL <i>11.2 R36</i>	425455	287	1413	653	4228	W8		W10		779	120	34		
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	1905	2065	2230	2390	2550	2680	2805	2920	3030	3145	3255	3370	3480	3705	
30 km/h Cyc	1725	1805	1885	1960	2040	2145	2250	2350	2450	2550	2650	2850			
25 km/h	1720	1790	1860	1930	2000	2110	2220	2300	2380	2460	2540	2700			
30 km/h	1660	1725	1795	1860	1925	2035	2140	2215	2295	2370	2445	2600			
40 km/h	1550	1615	1675	1740	1800	1900	2000	2070	2145	2215	2285	2360	2430		
50 km/h				1800	1900	2000	2070	2145	2215	2285	2360	2430			
max 40 km/h FRT												2615	2765	2915	

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
38	270/95 R38 140A8/140B TL <i>11.2 R38</i>	709100	267	1467	683	4408	W8		DW10 W10		779	121	34		
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	1955	2105	2255	2400	2550	2720	2890	3005	3120	3235	3350	3465	3580	3810	
30 km/h Cyc	1770	1855	1935	2020	2100	2175	2250	2365	2475	2590	2700	2815	2925		
25 km/h	1780	1850	1915	1985	2050	2170	2290	2370	2450	2535	2615	2695			
30 km/h	1710	1780	1845	1915	1980	2095	2205	2285	2360	2440	2520	2595			
40 km/h	1600	1665	1725	1790	1850	1955	2060	2135	2205	2280	2355	2425			
50 km/h				1850	1955	2060	2135	2205	2280	2355	2425	2500			
max 40 km/h FRT												2690	2845	3000	

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
42	270/95 R42 141A8/141B TL <i>11.2 R42</i>	962607	266	1570	729	4691	W8		W10			129	34		
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	2065	2230	2395	2555	2720	2890	3060	3180	3300	3415	3535	3655	3775	4010	
30 km/h Cyc	1875	1970	2065	2155	2250	2325	2400	2515	2630	2745	2860	2975			
25 km/h	1890	1960	2025	2095	2160	2255	2350	2435	2520	2605	2690	2775			
30 km/h	1820	1930	2035	2145	2250	2295	2335	2405	2475	2545	2615	2685			
40 km/h	1700	1765	1825	1890	1950	2065	2180	2245	2310	2380	2445	2510			
50 km/h				1950	2065	2180	2245	2310	2380	2445	2510	2575			
max 40 km/h FRT												2830	2960	3090	

* Refer to the notes at the end of the tables of this range

TAURUS RC 95 SOILSAVER

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)				
44	230/95 R44 134A8/134B TL <i>9.5 R44</i>	589041	228	1560	732	4669	W8	W7		99	31				
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	1700	1835	1975	2110	2245	2355	2465	2560	2655	2750	2850	2945	3040	3230	
30 km/h Cyc	1545	1615	1685	1755	1825	1905	1980	2065	2145	2230	2310	2395	2475		
25 km/h	1510	1580	1645	1715	1780	1860	1940	2010	2080	2150	2215	2285	2355		
30 km/h	1455	1520	1585	1645	1710	1795	1875	1940	2005	2075	2140	2205	2270		
40 km/h	1360	1420	1480	1540	1600	1675	1750	1810	1875	1935	1995	2060	2120		
50 km/h					1600	1675	1750	1810	1875	1935	1995	2060	2120		
max 40 km/h FRT													2280	2415	2545

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)				
44	270/95 R44 142A8/142B TL <i>11.2 R44</i>	171447	263	1632	762	4892	W8	W10	813	135	34				
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	2125	2295	2465	2635	2805	2975	3145	3270	3390	3515	3640	3760	3885	4130	
30 km/h Cyc	1930	1985	2035	2090	2140	2240	2335	2460	2585	2715	2840	2965	3090		
25 km/h	1890	1975	2055	2140	2220	2320	2420	2505	2595	2680	2765	2855	2940		
30 km/h	1820	1900	1980	2060	2140	2240	2335	2420	2500	2585	2670	2750	2835		
40 km/h	1700	1775	1850	1925	2000	2090	2180	2260	2335	2415	2495	2570	2650		
50 km/h					2000	2090	2180	2260	2335	2415	2495	2570	2650		
max 40 km/h FRT													2915	3050	3180

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim	Acceptable Rim	Tube (Code)	75% internal volume (litres)	Tread depth (mm)				
46	300/95 R46 148A8/148B TL <i>12.4 R46</i>	065793	306	1733	809	5206	W10	DW10	835	183	40				
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	2550	2740	2935	3125	3315	3510	3705	3860	4010	4165	4320	4470	4625	4930	
30 km/h Cyc	2325	2420	2515	2605	2700	2815	2925	3065	3200	3340	3475	3615	3750		
25 km/h	2290	2395	2495	2600	2700	2820	2940	3035	3125	3220	3310	3405	3495		
30 km/h	2205	2305	2405	2500	2600	2720	2835	2925	3015	3105	3190	3280	3370		
40 km/h	2060	2155	2245	2340	2430	2540	2650	2735	2815	2900	2985	3065	3150		
50 km/h					2430	2540	2650	2735	2815	2900	2985	3065	3150		
max 40 km/h FRT													3480	3630	3780

* Refer to the notes at the end of the tables of this range

TAURUS RC 95 SOILSAVER

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
48	230/95 R48 136A8/136B TL <i>9.5 R48</i>	812409	241	1672	790	5023	W8				835	107	31		
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	1750	1890	2030	2170	2310	2430	2550	2655	2765	2870	2975	3080	3190	3400	
30 km/h Cyc	1635	1710	1785	1855	1930	1985	2040	2140	2235	2335	2430	2530	2625		
25 km/h	1610	1665	1720	1775	1830	1940	2050	2125	2195	2270	2340	2415	2485		
30 km/h	1550	1620	1685	1755	1820	1900	1980	2050	2120	2190	2255	2325	2395		
40 km/h	1450	1515	1575	1640	1700	1775	1850	1915	1980	2045	2110	2175	2240		
50 km/h					1700	1775	1850	1915	1980	2045	2110	2175	2240		
max 40 km/h FRT													2400	2545	2690

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
48	270/95 R48 144A8/144B TL <i>11.2 R48</i>	424954	272	1729	812	5197	W8		W10		835	146	38		
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	2245	2430	2610	2795	2975	3105	3230	3375	3520	3660	3805	3950	4095	4380	
30 km/h Cyc	2040	2130	2220	2310	2400	2515	2625	2735	2840	2950	3055	3165	3270		
25 km/h	2000	2090	2175	2265	2350	2450	2550	2645	2735	2830	2925	3015	3110		
30 km/h	1925	2010	2100	2185	2270	2365	2460	2550	2640	2730	2815	2905	2995		
40 km/h	1800	1880	1960	2040	2120	2210	2300	2385	2465	2550	2635	2715	2800		
50 km/h					2120	2210	2300	2385	2465	2550	2635	2715	2800		
max 40 km/h FRT													3090	3225	3360

Ø inches	Description	CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)		
48	340/85 R48 152A8/152B TL <i>13.6 R48</i>	409717	369	1774	826	5314	W12		W11			214	38		
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	2890	3095	3300	3500	3705	3920	4130	4305	4480	4655	4830	5000	5175	5525	
30 km/h Cyc	2625	2740	2860	2975	3090	3180	3270	3425	3580	3735	3890	4045	4200		
25 km/h	2550	2670	2785	2905	3020	3175	3330	3430	3535	3635	3735	3840	3940		
30 km/h	2460	2575	2690	2800	2915	3065	3210	3310	3405	3505	3605	3700	3800		
40 km/h	2300	2405	2515	2620	2725	2865	3000	3090	3185	3275	3365	3460	3550		
50 km/h					2725	2865	3000	3090	3185	3275	3365	3460	3550		
max 40 km/h FRT													3900	4080	4260

* Refer to the notes at the end of the tables of this range

TAURUS RC 95 SOILSAVER

Tyre specifications and pressure table (bar & psi). Load per tyre in kg*

Ø inches	Description			CAI	S mm	OD mm	LR mm	RC mm	Recommended Rim		Acceptable Rim		Tube (Code)	75% internal volume (litres)	Tread depth (mm)
50	380/90 R50 160A8/160B TL			332270	380	1954	913	5882	DW13A		DW12 W12 W13A			329	43
Bar	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	3.8	4.0	4.4	4.8
Psi	23	26	29	32	35	38	41	44	46	49	52	55	58	64	70
10 km/h Cyc	3540	3945	4350	4555	4765	4970	5175	5380	5590	5795	6000	6125	6250	6500	6750
25 km/h Cyc	3540	3710	3875	4045	4210	4380	4545	4715	4880	5035	5185	5340	5490		
30 km/h Cyc	3305	3465	3620	3780	3935	4090	4250	4405	4560	4705	4845	4990	5130		
25 km/h	3220	3375	3525	3680	3830	3985	4135	4290	4440	4580	4720	4860	5000		
30 km/h	3100	3250	3395	3545	3690	3840	3985	4135	4280	4415	4550	4680	4815		
50 km/h	2900	3040	3175	3315	3450	3590	3725	3865	4000	4125	4250	4375	4500		

*IMPORTANT:

The inflation pressure must always be appropriate for the load per TYRE, the speed of travel and the work to be done. Our recommendations above are provided subject to changes made after the date of publication of these tables (July 2019). Technical data is subject to change without prior notice.

- For use on side slopes >20%: add 0.4 bar without exceeding the max. TYRE pressure.
- For heavy road use >50%, add 0.4 bar.
- Use 10, 25 or 30 km/h cyclic loading tables for field use only, travel with full load not to exceed 1,5 km

NOTES

A series of horizontal dotted lines for taking notes.

NOTES

A series of horizontal dotted lines for taking notes.



TYRES TECHNICAL DATA BOOK

2019/2020

