

MICHELIN® POWER CL™ TIRE



BIAS PLY TIRE RESISTANT TO CUTS WITH GREAT STABILITY

ROBUSTNESS

- Multiple casing plies for impact and puncture resistance.

STABILITY

- Sidewall rigidity allows for excellent vertical and lateral stability.

LOAD CAPACITY

- High load capacity for optimized productivity.

SIDEWALL THICKNESS

- 20 mm compared to 12 mm (vs. a leading competitor tire) for enhanced puncture resistance.



Backhoe Loaders



Compact Wheel Loaders



Telehandlers



MICHELIN® POWER CL™


UTILITY AND INDUSTRIAL PREMIUM BIAS PLY TIRE

Tread rubber resists damage

Large lugs for long service life and reduced operating costs

Rigid sidewall for load stability

Rubber mix designed for sidewall protection

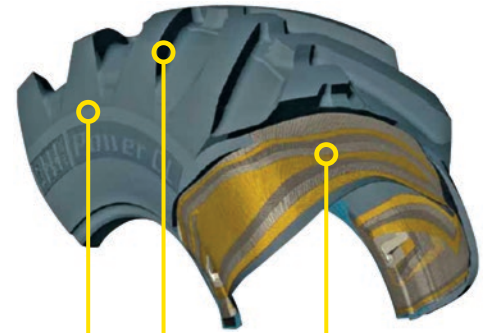

Eight casing plies for enhanced puncture and impact resistance

Deep tread design and special rubber compounds for long tire life

Extra thick sidewall for added protection



Overlapping lug noses provide robustness and strength and excellent resistance to chunking for a long tire life

Size	I.S.O. Index	Product Code	Equivalent Size	Max Inflation Pressure (psi)	Max Load (lbs)	Section Width (in)	Overall Dia. (in)	Rolling Circum. (in)	Tread Depth (32nds)
280/80-18	132A8	38882	10.5/80-18	58	10,140	11.3	35.5	105.9	33
340/80-18	143A8	04967	12.5/80-18	58	13,825	13.9	39.6	117.6	30
280/80-20	133A8	28486	10.5-20	58	10,450	11.3	37.3	111.3	34
340/80-20	144A8	56730	12.5/80-20	58	14,200	13.3	41.1	122.5	32
400/80-20	149A8	18007	16.0/70 - 20	58	16,490	15.9	41.9	124.7	37
400/70-24	158A8	60752	16.0/70-24	73	21,550	16.5	46.2	137.7	37
400/80-24	162A8	53837	15.5/80-24	73	24,095	16.3	49.5	147.4	37
440/80-24	168A8	56443	16.9-24	73	28,395	18.1	52.3	155.3	37
460/70-24	159A8	86617	17.5-24	58	22,180	18	48.9	145.2	37
500/70-24	164A8	6567	19.5-24	58	25,355	19.8	51.8	153.7	37
480/80-26	167A8	32114	18.4-26	58	27,635	19.8	55.8	165.8	35
440/80-28	163A8	95541	16.9-28	58	24,725	17.7	55.6	165.4	37
420/80-30	155A8	29803	16.9-30	46	12,820	17	56.4	169.1	45

TO FIND OUT MORE
 US: business.michelinman.com/agriculture
 CA: business.michelin.ca

FIND US ON FACEBOOK
 @MichelinTruck

CONTACT US BY EMAIL
 US: business.michelinman.com/contact-us
 CA: business.michelin.ca/contact

CONTACT US BY TELEPHONE
 US: 1-888-622-2306
 CA: 1-888-622-2306

Michelin North America Inc., One Parkway South, Greenville, SC 29615
 Michelin North America (Canada) Inc., 2500 Daniel Johnson Blvd., Suite 500, Laval (QC) H7T 2P6
 Copyright © 2021 Michelin North America, Inc. All rights reserved. | © 2021 MNA(C). All rights reserved.
 Specifications subject to change without notice. | An Equal Opportunity Employer | PDF Only (BWA 11/21)

