




ON/OFF ROAD APPLICATIONS

# THE MICHELIN® X® WORKS XDY® TIRE

Next generation on/off road drive tire optimized for exceptional traction and wear in mixed and severe service for on/off road applications.

Line Haul	Regional	Urban	On/Off Road
<input checked="" type="checkbox"/> Recommended	<input type="checkbox"/> Acceptable		



DIRECTIONAL TIRE  
(For 1st Half of Life)



(1) Contact your local Michelin representative for details. Michelin reserves the right to modify or discontinue this program at any time for any reason without prior notice.

[business.michelinman.com](http://business.michelinman.com)



**MICHELIN**

# THE MICHELIN® X® WORKS XDY® TIRE

Next generation on/off road drive tire optimized for exceptional traction and wear in mixed and severe service for on/off road applications.

## Improved Traction<sup>(1)</sup>

- More efficient mud-evacuation.
- New Directional Tread Design
  - Robust Center Tread Region

## 10% Increase in Removal Mileage<sup>(1)</sup>

- Longer tread life.
- New Wider Tread Design

## Maximum Mileage and Casing Life


- Co-Ex Technology.
- Anti-cut/chip compound for long tread life
  - Cool tread rubber reduces temperatures in crown area to preserve the casing

## Excellent Retreadability

- Fight casing fatigue.
- Robust Four Steel Belt Construction
- Preserve belt package from impacts.
- Shock Pads
- Reduce bead damage during mounting and demounting.
- Rounded Bead Toe Design

## Maximum Sidewall Protection

- Severe service protection against aggression, chipping and scaling.
- Extra-Thick Sidewall

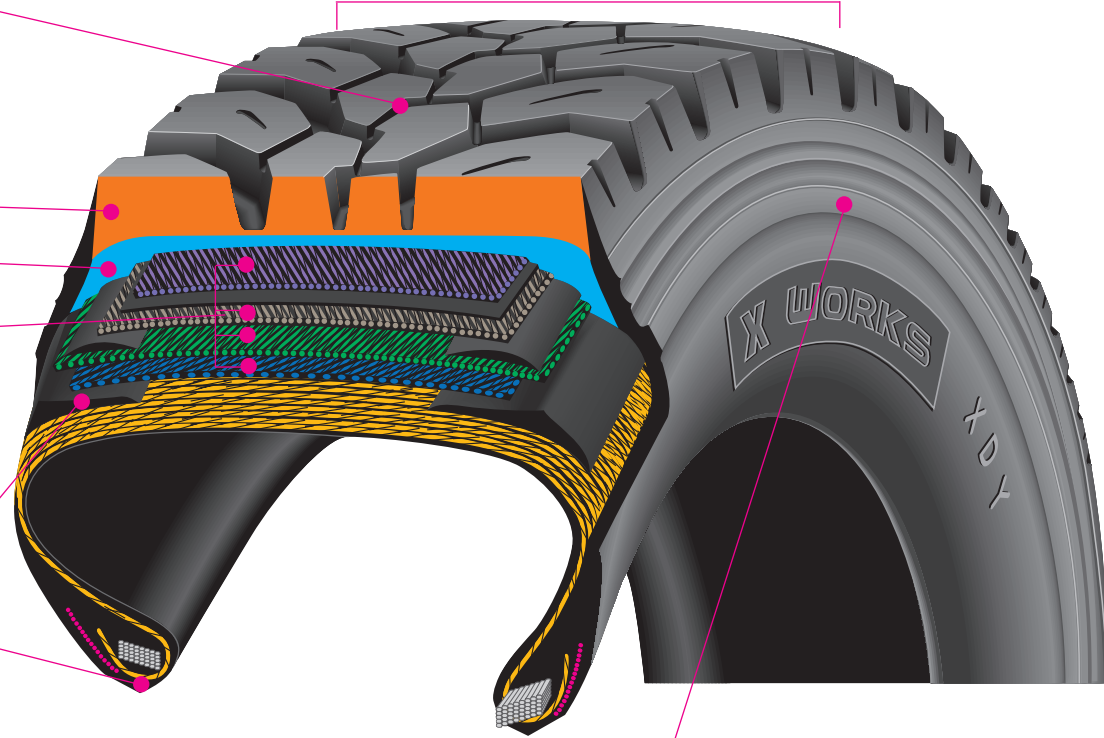

**DIRECTIONAL TIRE**  
(For 1st Half of Life)

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (+)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
				mph	kph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
315/80R22.5 (2,3)	L	55576	28	65	105	20.0	507	43.0	1091	12.5	317	9.00, 9.75	13.8	351	486	9090	130	4125	900	8270	130	3750	900

Note: Wheel listed first is the measuring wheel.

(1) When compared to the MICHELIN® XDY®3 tire.

(2) Directional tread design.

(3) Not approved for use with an 8.25 wheel on vehicles produced after January 1, 2018.

(\*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please business.michelinman.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.

TO FIND OUT MORE  
US: [business.michelinman.com](http://business.michelinman.com)  
CA: [business.michelin.ca](http://business.michelin.ca)

FIND US ON FACEBOOK  
[michelintruck](https://www.facebook.com/michelintruck)

VISIT US ON THE WEB  
US: [business.michelinman.com/contact-us](http://business.michelinman.com/contact-us)  
CA: [business.michelin.ca/contact-us](http://business.michelin.ca/contact-us)

CONTACT US BY TELEPHONE  
US: 1-888-622-2306  
CA: 1-888-622-2306